

**Nokia Customer Care**

# ***Service Manual***

**RM-410; RM-411 (Nokia 5220 XpressMusic)**

## **Mobile Terminal**

***Part No: 9210657 (Issue 1)***

***COMPANY CONFIDENTIAL***

**NOKIA**  
Care

**Amendment Record Sheet**

Amendment No	Date	Inserted By	Comments
Original issue	06/2008	Jeff Zhao	

DRAFT

## Copyright

Copyright © 2008 Nokia. All rights reserved.

Reproduction, transfer, distribution or storage of part or all of the contents in this document in any form without the prior written permission of Nokia is prohibited.

Nokia, Nokia Connecting People, and Nokia X and Y are trademarks or registered trademarks of Nokia Corporation. Other product and company names mentioned herein may be trademarks or tradenames of their respective owners.

Nokia operates a policy of continuous development. Nokia reserves the right to make changes and improvements to any of the products described in this document without prior notice.

Under no circumstances shall Nokia be responsible for any loss of data or income or any special, incidental, consequential or indirect damages howsoever caused.

The contents of this document are provided "as is". Except as required by applicable law, no warranties of any kind, either express or implied, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose, are made in relation to the accuracy, reliability or contents of this document. Nokia reserves the right to revise this document or withdraw it at any time without prior notice.

The availability of particular products may vary by region.

## IMPORTANT

This document is intended for use by qualified service personnel only.

## Warnings and cautions

### Warnings

- IF THE DEVICE CAN BE INSTALLED IN A VEHICLE, CARE MUST BE TAKEN ON INSTALLATION IN VEHICLES FITTED WITH ELECTRONIC ENGINE MANAGEMENT SYSTEMS AND ANTI-SKID BRAKING SYSTEMS. UNDER CERTAIN FAULT CONDITIONS, EMITTED RF ENERGY CAN AFFECT THEIR OPERATION. IF NECESSARY, CONSULT THE VEHICLE DEALER/MANUFACTURER TO DETERMINE THE IMMUNITY OF VEHICLE ELECTRONIC SYSTEMS TO RF ENERGY.
- THE PRODUCT MUST NOT BE OPERATED IN AREAS LIKELY TO CONTAIN POTENTIALLY EXPLOSIVE ATMOSPHERES, FOR EXAMPLE, PETROL STATIONS (SERVICE STATIONS), BLASTING AREAS ETC.
- OPERATION OF ANY RADIO TRANSMITTING EQUIPMENT, INCLUDING CELLULAR TELEPHONES, MAY INTERFERE WITH THE FUNCTIONALITY OF INADEQUATELY PROTECTED MEDICAL DEVICES. CONSULT A PHYSICIAN OR THE MANUFACTURER OF THE MEDICAL DEVICE IF YOU HAVE ANY QUESTIONS. OTHER ELECTRONIC EQUIPMENT MAY ALSO BE SUBJECT TO INTERFERENCE.
- BEFORE MAKING ANY TEST CONNECTIONS, MAKE SURE YOU HAVE SWITCHED OFF ALL EQUIPMENT.

### Cautions

- Servicing and alignment must be undertaken by qualified personnel only.
- Ensure all work is carried out at an anti-static workstation and that an anti-static wrist strap is worn.
- Ensure solder, wire, or foreign matter does not enter the telephone as damage may result.
- Use only approved components as specified in the parts list.
- Ensure all components, modules, screws and insulators are correctly re-fitted after servicing and alignment.
- Ensure all cables and wires are repositioned correctly.
- Never test a mobile phone WCDMA transmitter with full Tx power, if there is no possibility to perform the measurements in a good performance RF-shielded room. Even low power WCDMA transmitters may disturb nearby WCDMA networks and cause problems to 3G cellular phone communication in a wide area.
- During testing never activate the GSM or WCDMA transmitter without a proper antenna load, otherwise GSM or WCDMA PA may be damaged.

## For your safety

### **QUALIFIED SERVICE**

Only qualified personnel may install or repair phone equipment.

### **ACCESSORIES AND BATTERIES**

Use only approved accessories and batteries. Do not connect incompatible products.

### **CONNECTING TO OTHER DEVICES**

When connecting to any other device, read its user's guide for detailed safety instructions. Do not connect incompatible products.

## Care and maintenance

This product is of superior design and craftsmanship and should be treated with care. The suggestions below will help you to fulfil any warranty obligations and to enjoy this product for many years.

- Keep the phone and all its parts and accessories out of the reach of small children.
- Keep the phone dry. Precipitation, humidity and all types of liquids or moisture can contain minerals that will corrode electronic circuits.
- Do not use or store the phone in dusty, dirty areas. Its moving parts can be damaged.
- Do not store the phone in hot areas. High temperatures can shorten the life of electronic devices, damage batteries, and warp or melt certain plastics.
- Do not store the phone in cold areas. When it warms up (to its normal temperature), moisture can form inside, which may damage electronic circuit boards.
- Do not drop, knock or shake the phone. Rough handling can break internal circuit boards.
- Do not use harsh chemicals, cleaning solvents, or strong detergents to clean the phone.
- Do not paint the phone. Paint can clog the moving parts and prevent proper operation.
- Use only the supplied or an approved replacement antenna. Unauthorised antennas, modifications or attachments could damage the phone and may violate regulations governing radio devices.

All of the above suggestions apply equally to the product, battery, charger or any accessory.

## ESD protection

Nokia requires that service points have sufficient ESD protection (against static electricity) when servicing the phone.

Any product of which the covers are removed must be handled with ESD protection. The SIM card can be replaced without ESD protection if the product is otherwise ready for use.

To replace the covers ESD protection must be applied.

All electronic parts of the product are susceptible to ESD. Resistors, too, can be damaged by static electricity discharge.

All ESD sensitive parts must be packed in metallized protective bags during shipping and handling outside any ESD Protected Area (EPA).

Every repair action involving opening the product or handling the product components must be done under ESD protection.

ESD protected spare part packages **MUST NOT** be opened/closed out of an ESD Protected Area.

For more information and local requirements about ESD protection and ESD Protected Area, contact your local Nokia After Market Services representative.

## Battery information

**Note:** A new battery's full performance is achieved only after two or three complete charge and discharge cycles!

The battery can be charged and discharged hundreds of times but it will eventually wear out. When the operating time (talk-time and standby time) is noticeably shorter than normal, it is time to buy a new battery.

Use only batteries approved by the phone manufacturer and recharge the battery only with the chargers approved by the manufacturer. Unplug the charger when not in use. Do not leave the battery connected to a charger for longer than a week, since overcharging may shorten its lifetime. If left unused a fully charged battery will discharge itself over time.

Temperature extremes can affect the ability of your battery to charge.

For good operation times with Ni-Cd/NiMH batteries, discharge the battery from time to time by leaving the product switched on until it turns itself off (or by using the battery discharge facility of any approved accessory available for the product). Do not attempt to discharge the battery by any other means.

Use the battery only for its intended purpose.

Never use any charger or battery which is damaged.

Do not short-circuit the battery. Accidental short-circuiting can occur when a metallic object (coin, clip or pen) causes direct connection of the + and - terminals of the battery (metal strips on the battery) for example when you carry a spare battery in your pocket or purse. Short-circuiting the terminals may damage the battery or the connecting object.

Leaving the battery in hot or cold places, such as in a closed car in summer or winter conditions, will reduce the capacity and lifetime of the battery. Always try to keep the battery between 15°C and 25°C (59°F and 77°F). A phone with a hot or cold battery may temporarily not work, even when the battery is fully charged. Batteries' performance is particularly limited in temperatures well below freezing.

Do not dispose of batteries in a fire!

Dispose of batteries according to local regulations (e.g. recycling). Do not dispose as household waste.

## Company Policy

Our policy is of continuous development; details of all technical modifications will be included with service bulletins.

While every endeavour has been made to ensure the accuracy of this document, some errors may exist. If any errors are found by the reader, NOKIA MOBILE PHONES Business Group should be notified in writing/e-mail.

Please state:

- Title of the Document + Issue Number/Date of publication
- Latest Amendment Number (if applicable)
- Page(s) and/or Figure(s) in error

### **Please send to:**

NOKIA CORPORATION  
Nokia Mobile Phones Business Group  
Nokia Customer Care  
PO Box 86  
FIN-24101 SALO  
Finland  
E-mail: [Service.Manuals@nokia.com](mailto:Service.Manuals@nokia.com)

(This page left intentionally blank.)

## **Nokia 5220 XpressMusic Service Manual Structure**

- 1 General information
- 2 Service Devices and Service Concepts
- 3 BB Troubleshooting and Manual Tuning Guide
- 4 RF troubleshooting
- 5 System Module
- Glossary

(This page left intentionally blank.)

## 1 — General information

(This page left intentionally blank.)

## Table of Contents

Product selection.....	1-5
Phone features .....	1-5
User interface and software features.....	1-6
Accessories.....	1-6
Technical specifications.....	1-7
General specifications.....	1-7
Battery endurance.....	1-7

### List of Tables

Table 1 Battery and chargers .....	1-6
Table 2 Headsets .....	1-7
Table 3 Data cables .....	1-7

### List of Figures

Figure 1 RM-410/411 (Nokia 5220 XpressMusic ) product picture .....	1-5
---	-----

(This page left intentionally blank.)

## ■ Product selection

RM-410/411 (Nokia 5220 XpressMusic) is a GSM quad band phone, supporting GSM850/900/1800/1900 bands.



Figure 1 RM-410/411 (Nokia 5220 XpressMusic) product picture

## ■ Phone features

### Display and keypad features

- 2" 240x320 pixel, 16M true colour display
- 5-way , navi-key (2 soft-keys, call and end keys)

### Hardware features

- 2-megapixel camera with 4x digital zoom
- 3.5mm AV connector for stereo headset
- Micro USB port for data transfer (USB 2.0)
- Bluetooth (version 2.0)
- RDS Stereo radio and music player
- Internal vibrator and antenna
- Plug-in SIM (1.8 V and 3.0 V)
- MicroSD card hot swap slot (up to 4GB)
- Dedicated music keys (play/pause/forward)
- DAC33 for improved music quality and extended playback time
- Side volume keys with zoom functionality

### RF features

- GSM850/900/1800/1900
- EGPRS: MSC 32 (MSC 31 in China)

- GPRS: MSC 32 (MSC 31 in China)
- HSCDS
- CSD

## ■ User interface and software features

### Selection of software applications and services

- Audio messages
- 3GPP streaming / downloading video
- XHTML browsing over TCP/IP
- Themes (wallpapers, icons, colors)
- Music Player supporting MP3, AAC, ACC+, eAAC+ and WMA
- Nokia Xpress audio messaging (AMS)
- OMA DRM 2.0 (Digital Right Management)
- OMA MMS 1.2, MMS Conformance 3.0, AMR and SMIL
- OMA Client Provisioning v1.1
- Java
- MP3 ringing tones, true tones and MIDI ringing, alert and gaming tones with support of 64 polyphony
- Video ringing tones
- WAP 2.0, XHTML browser over HTTP/TCP/IP stack
- SyncML (local and remote)
- TWIN PC Suite

## ■ Accessories

### Sales package contents

- Nokia 5220 XpressMusic phone
- Nokia Battery BL-5CT
- Nokia Charger: AC-3  
(AC-6 and CA-100C for PRC)
- 2GB micro SD memory card (area dependent)
- Nokia wired stereo headset: HS-45
- CD rom
- User Guide

**Table 1 Battery and chargers**

Type	Name
<b>Note:</b> This phone is charged through the smaller charger Nokia standard interface (2.mm plug). The standard 3.5mm standard charger can be used together with the CA-44 charger adapter.	
AC-3	Charger
BL-5CT	Battery 1050 mAh Li-Ion

Table 2 Headsets

Type	Name
HS-45	Stereo headset (wired)
HS-62	Stereo headset (wired)
HS-39W	Stereo headset (BT)
HS-71W	Stereo headset (BT)

Table 3 Data cables

Type	Name
CA-101	Micro USB cable

## ■ Technical specifications

### General specifications

Unit	Dimension (mm)	Weight (g)	Volume (cc)
Transceiver with BL-5CT 1050 mAh Li-Ion battery pack	103.8 x 44.7 x 9.9	70.2	44.8

### Battery endurance

Battery	NMP Talk time	NMP Standby time
BL-5CT 1050 mAh Li-ion	Up to 5.4 Hours	12.5 Days Music 18 Hours

**Note:** Variation in operation times will occur depending on SIM card, network settings and usage.

(This page left intentionally blank.)

## 2 — Service Devices and Service Concepts

(This page left intentionally blank.)

## Table of Contents

Service devices.....	2-5
Product specific devices.....	2-5
FS-91.....	2-5
MJ-189.....	2-5
RJ-230.....	2-5
SA-138.....	2-6
General devices.....	2-6
CU-4.....	2-7
FLS-5.....	2-8
FPS-10.....	2-8
PK-1.....	2-8
PKD-1.....	2-9
RJ-215.....	2-9
RJ-216.....	2-9
SB-6.....	2-9
SPS-2.....	2-9
SRT-6.....	2-10
SS-46.....	2-10
SS-62.....	2-10
SS-88.....	2-10
SS-93.....	2-10
ST-66.....	2-11
ST-67.....	2-11
SX-4.....	2-11
Cables.....	2-11
CA-101.....	2-11
CA-35S.....	2-12
PCS-1.....	2-12
XCS-4.....	2-12
XRE-2.....	2-13
XRF-1.....	2-13
Service concepts.....	2-14
POS (Point of Sale) flash concept.....	2-14
Flash concept with FPS-10.....	2-15
CU-4 flash concept with FPS-10.....	2-16
Module jig service concept.....	2-17
RF testing concept with RF coupler.....	2-18
Service concept for RF testing and RF/BB tuning.....	2-19

### List of Figures

Figure 2 POS flash concept.....	2-14
Figure 3 Basic flash concept with FPS-10.....	2-15
Figure 4 CU-4 flash concept with FPS-10.....	2-16
Figure 5 Module jig service concept.....	2-17
Figure 6 RF testing concept with RF coupler.....	2-18
Figure 7 Service concept for RF testing and RF/BB tuning.....	2-19

(This page left intentionally blank.)

■ Service devices

Product specific devices

The table below gives a short overview of service devices that can be used for testing, error analysis, and repair of product RM-410; RM-411. For the correct use of the service devices, and the best effort of workbench setup, please refer to various concepts.

 <p><b>FS-91</b></p>	FS-91	Flash adapter	
<ul style="list-style-type: none"> <li>• FS-91 is equipped with a clip interlock system</li> <li>• provides standardised interface towards Control Unit</li> <li>• provides RF connection using coupler</li> <li>• multiplexing between USB and FBUS media, controlled by VUSB</li> </ul>			
 <p><b>MJ-189</b></p>	MJ-189	Module jig	
<p>MJ-189 is meant for component level troubleshooting. The jig includes an RF interface for GSM and Bluetooth. In addition, it has the following features:</p> <ul style="list-style-type: none"> <li>• Provides mechanical interface with the engine module</li> <li>• Provides galvanic connection to all needed test pads in module</li> <li>• Multiplexing between USB and FBUS media, controlled by Vusb</li> <li>• MMC interface</li> <li>• Duplicated SIM connector</li> <li>• Connector for control unit</li> <li>• Access for AV- and USB connectors</li> </ul>			
 <p><b>RJ-230</b></p>	RJ-230	Common jig	
<p>RJ-230 is a jig used for soldering and as a rework jig for the engine module.</p>			

 <p>SA-138</p>	SA-138	RF coupler																					
	<p>SA-138 is an RF coupler for GSM RF testing. It is used together with SS-46 and SS-62.</p> <p>The following table shows attenuations from the antenna pads of the mobile terminal to the SMA connectors of SA-138:</p>																						
	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Att. (dB)</th> <th>Tol. (dB)</th> </tr> </thead> <tbody> <tr> <td>GSM900 TX</td> <td>Low: 6.9 Mid: 5.8 High: 5.0</td> <td>±1</td> </tr> <tr> <td>GSM900 RX</td> <td>Low: 4 Mid: 3 High: 3</td> <td>±1</td> </tr> <tr> <td>GSM1800 TX</td> <td>Low: 8.7 Mid: 8.7 High: 8.1</td> <td>±1</td> </tr> <tr> <td>GSM1800 RX</td> <td>Low: 6 Mid: 7 High: 7</td> <td>±1</td> </tr> <tr> <td>GSM1900 TX</td> <td>Low: 7.4 Mid: 7.3 High: 8.5</td> <td>±1</td> </tr> <tr> <td>GSM1900 RX</td> <td>Low: 8 Mid: 7 High: 7</td> <td>±1</td> </tr> </tbody> </table>			Frequency	Att. (dB)	Tol. (dB)	GSM900 TX	Low: 6.9 Mid: 5.8 High: 5.0	±1	GSM900 RX	Low: 4 Mid: 3 High: 3	±1	GSM1800 TX	Low: 8.7 Mid: 8.7 High: 8.1	±1	GSM1800 RX	Low: 6 Mid: 7 High: 7	±1	GSM1900 TX	Low: 7.4 Mid: 7.3 High: 8.5	±1	GSM1900 RX	Low: 8 Mid: 7 High: 7
Frequency	Att. (dB)	Tol. (dB)																					
GSM900 TX	Low: 6.9 Mid: 5.8 High: 5.0	±1																					
GSM900 RX	Low: 4 Mid: 3 High: 3	±1																					
GSM1800 TX	Low: 8.7 Mid: 8.7 High: 8.1	±1																					
GSM1800 RX	Low: 6 Mid: 7 High: 7	±1																					
GSM1900 TX	Low: 7.4 Mid: 7.3 High: 8.5	±1																					
GSM1900 RX	Low: 8 Mid: 7 High: 7	±1																					

**General devices**

The table below gives a short overview of service devices that can be used for testing, error analysis, and repair of product RM-410; RM-411. For the correct use of the service devices, and the best effort of workbench setup, please refer to various concepts.

## CU-4



CU-4

Control unit

CU-4 is a general service tool used with a module jig and/or a flash adapter. It requires an external 12 V power supply.

The unit has the following features:

- software controlled via USB
- EM calibration function
- Forwards FBUS/Flashbus traffic to/from terminal
- Forwards USB traffic to/from terminal
- software controlled BSI values
- regulated VBATT voltage
- 2 x USB2.0 connector (Hub)
- FBUS and USB connections supported

When using CU-4, note the special order of connecting cables and other service equipment:

### Instructions



- 1 Connect a service tool (jig, flash adapter) to CU-4.
- 2 Connect CU-4 to your PC with a USB cable.
- 3 Connect supply voltage (12 V)
- 4 Connect an FBUS cable (if necessary).
- 5 Start Phoenix service software.





**Note:** Phoenix enables CU-4 regulators via USB when it is started.

Reconnecting the power supply requires a Phoenix restart.

	FLS-5	Flash device	
<p>FLS-5 is a dongle and flash device incorporated into one package, developed specifically for POS use.</p> <p><b>Note:</b> FLS-5 can be used as an alternative to PKD-1.</p>			
	FPS-10	Flash prommer	
<p>FPS-10 interfaces with:</p> <ul style="list-style-type: none"> <li>• PC</li> <li>• Control unit</li> <li>• Flash adapter</li> <li>• Smart card</li> </ul> <p>FPS-10 flash prommer features:</p> <ul style="list-style-type: none"> <li>• Flash functionality for BB5 and DCT-4 terminals</li> <li>• Smart Card reader for SX-2 or SX-4</li> <li>• USB traffic forwarding</li> <li>• USB to FBUS/Flashbus conversion</li> <li>• LAN to FBUS/Flashbus and USB conversion</li> <li>• Vusb output switchable by PC command</li> </ul> <p>FPS-10 sales package includes:</p> <ul style="list-style-type: none"> <li>• FPS-10 prommer</li> <li>• Power Supply with 5 country specific cords</li> <li>• USB cable</li> </ul> <p><b>Note:</b> FPS-21 is substitute FPS-10 if FPS-10 has not been set up.</p>			
	PK-1	Software protection key	
<p>PK-1 is a hardware protection key with a USB interface. It has the same functionality as the PKD-1 series dongle.</p> <p>PK-1 is meant for use with a PC that does not have a series interface.</p> <p>To use this USB dongle for security service functions please register the dongle in the same way as the PKD-1 series dongle.</p>			

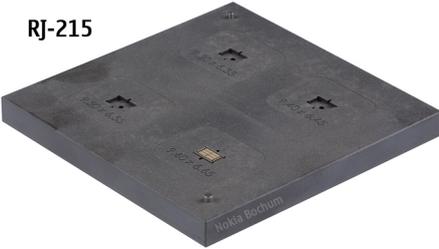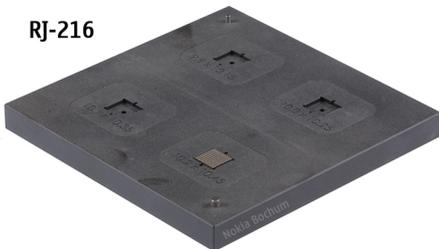	PKD-1	SW security device	
<p>SW security device is a piece of hardware enabling the use of the service software when connected to the parallel (LPT) port of the PC. Without the device, it is not possible to use the service software. Printer or any such device can be connected to the PC through the device if needed.</p>			
<p>RJ-215</p> 	RJ-215	Rework jig	
<p>RJ-215 is a jig used for soldering and as a rework jig for the engine module. It is used together with the ST-66 stencil.</p>			
<p>RJ-216</p> 	RJ-216	Rework jig	
<p>RJ-216 is a jig used for soldering and as a rework jig for the engine module. It is used together with the ST-67 stencil.</p>			
	SB-6	Bluetooth tester	
<p>The SB-6 test box is a generic device to perform Bluetooth bit error rate testing and doing cordless FBUS connection via Bluetooth.</p>			
	SPS-2	Soldering paste spreader	

	SRT-6	Opening tool	
<p>SRT-6 is used to open phone covers.</p>			
<p><b>SS-46</b></p> 	SS-46	Interface adapter	
<p>SS-46 acts as an interface adapter between the flash adapter and FPS-10.</p>			
	SS-62	Generic flash adapter base for BB5	
<ul style="list-style-type: none"> <li>• generic base for flash adapters and couplers</li> <li>• SS-62 equipped with a clip interlock system</li> <li>• provides standardised interface towards Control Unit</li> <li>• provides RF connection using galvanic connector or coupler</li> <li>• multiplexing between USB and FBUS media, controlled by VUSB</li> </ul>			
	SS-88	Camera removal tool	
<p>The camera removal tool SS-88 is used to remove/attach the front camera module from/to the socket.</p>			
	SS-93	Blue stick tool	
<p>SS-93 is used for general disassembly and assembly tasks.</p>			

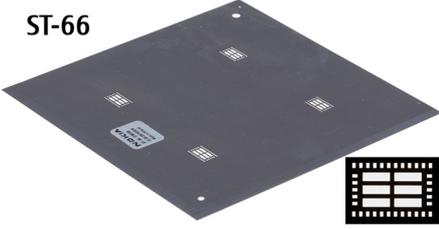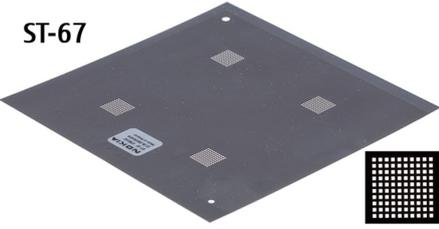 <p>ST-66</p>	ST-66	Rework stencil	
	ST-66 is a rework stencil used with rework jig RJ-215.		
 <p>ST-67</p>	ST-67	Rework stencil	
	ST-67 is a rework stencil used with rework jig RJ-216.		
 <p>SX-4</p>	SX-4	Smart card	
	<p>SX-4 is a BB5 security device used to protect critical features in tuning and testing.</p> <p>SX-4 is also needed together with FPS-10 when DCT-4 phones are flashed.</p>		

### Cables

The table below gives a short overview of service devices that can be used for testing, error analysis, and repair of product RM-410; RM-411. For the correct use of the service devices, and the best effort of workbench setup, please refer to various concepts.

 <p>CA-101 100cm</p>	CA-101	Micro USB cable	
	The CA-101 is a USB-to-microUSB data cable that allows connections between the PC and the phone.		

	CA-35S	Power cable	
<p>CA-35S is a power cable for connecting, for example, the FPS-10 flash prommer to the Point-Of-Sales (POS) flash adapter.</p>			
	PCS-1	Power cable	
<p>The PCS-1 power cable (DC) is used with a docking station, a module jig or a control unit to supply a controlled voltage.</p>			
	XCS-4	Modular cable	
<p>XCS-4 is a shielded (one specially shielded conductor) modular cable for flashing and service purposes.</p>			

	<p>XRE-2</p>	<p>Bluetooth cable</p>	
<p>The bluetooth cable connects the bluetooth connector of the module jig to the bluetooth test box JBT-9.</p>			
	<p>XRF-1</p>	<p>RF cable</p>	
<p>The RF cable is used to connect, for example, a module repair jig to the RF measurement equipment.                  SMA to N-Connector ca. 610mm.                  Attenuation for:</p> <ul style="list-style-type: none"> <li>• GSM850/900: 0.3+-0.1 dB</li> <li>• GSM1800/1900: 0.5+-0.1 dB</li> <li>• WLAN: 0.6+-0.1dB</li> </ul>			

■ Service concepts

POS (Point of Sale) flash concept

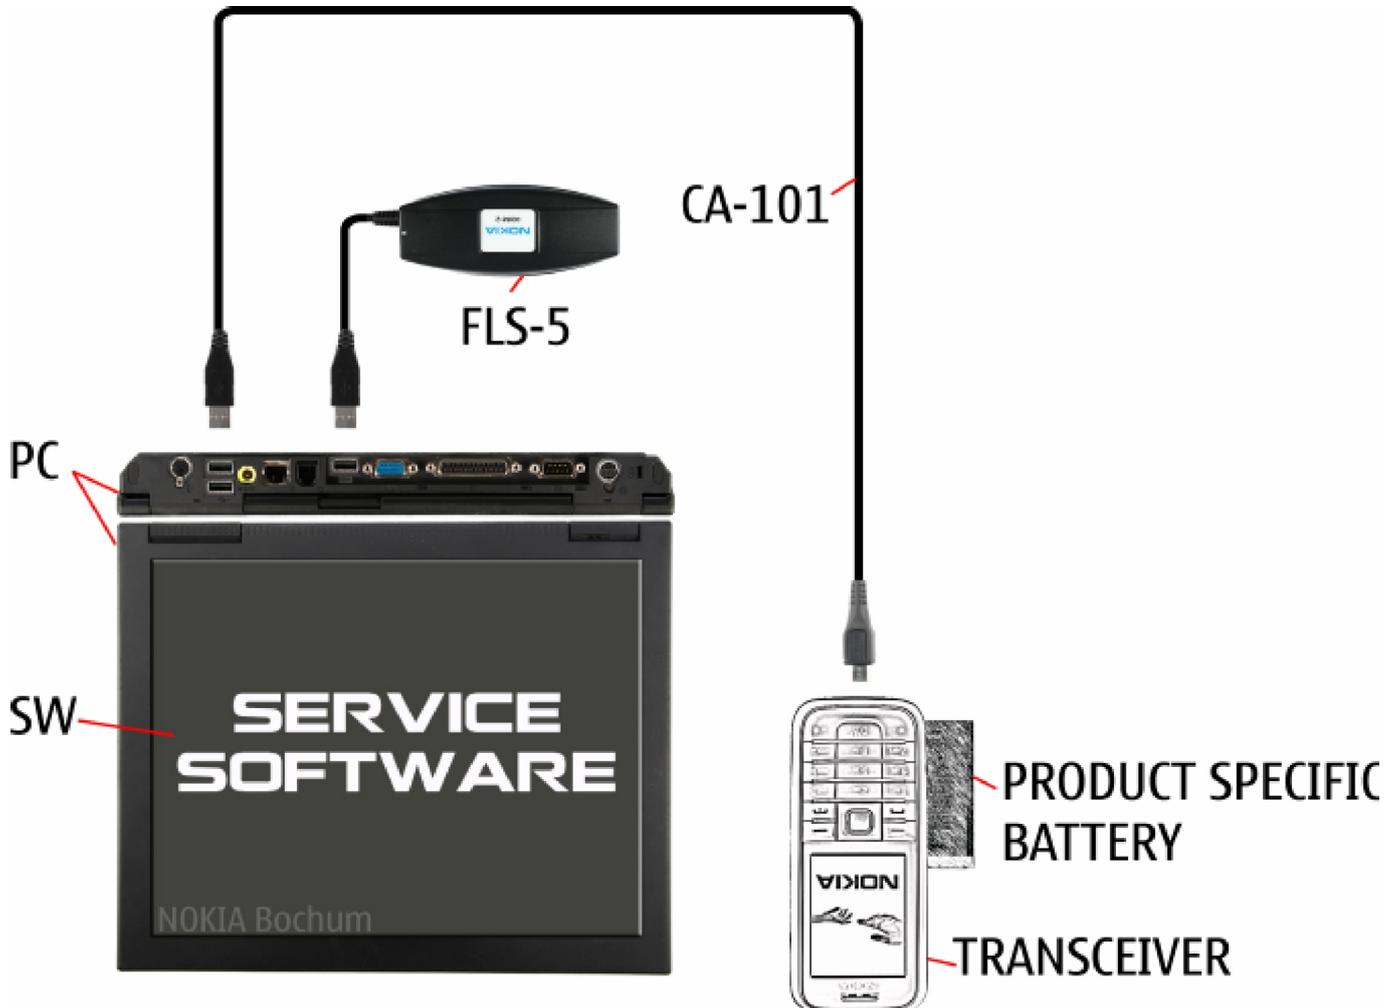


Figure 2 POS flash concept

Type	Description
<b>Product specific tools</b>	
BL-5CT	Battery
<b>Other tools</b>	
FLS-5	POS flash dongle
	PC with Phoenix service software
<b>Cables</b>	
CA-101	USB connectivity cable

**Flash concept with FPS-10**

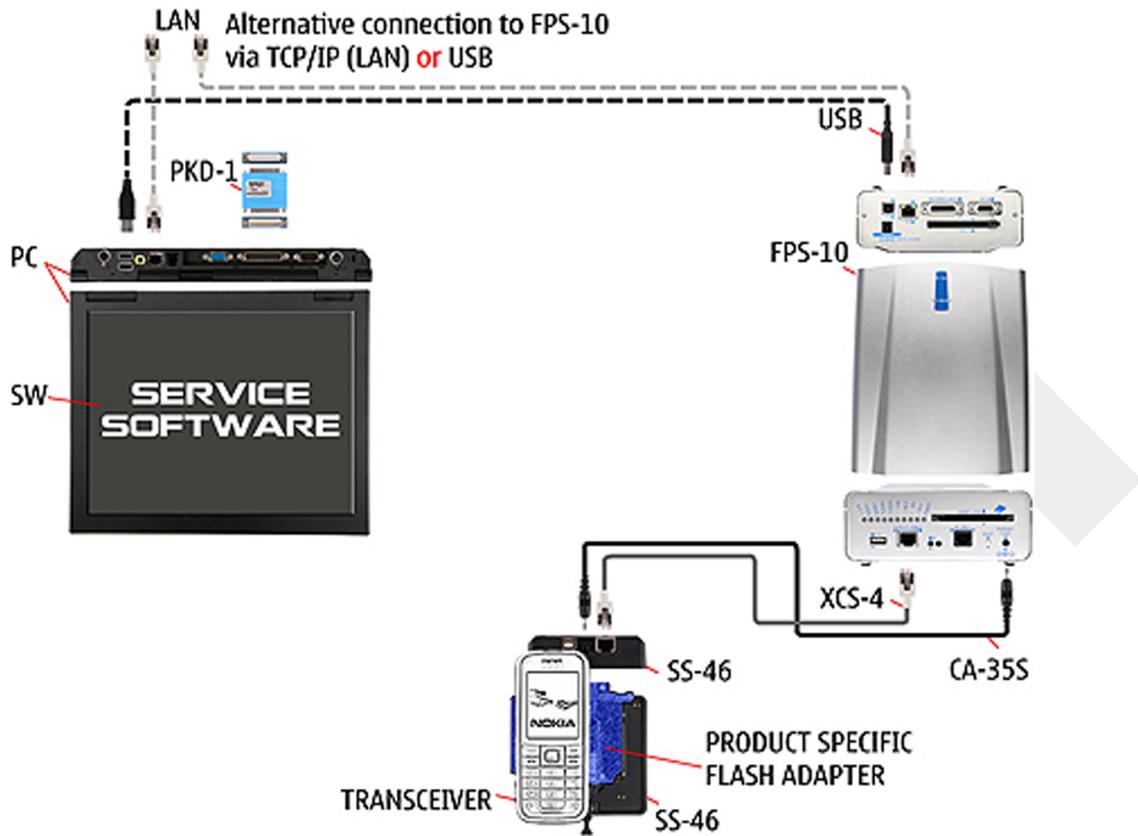


Figure 3 Basic flash concept with FPS-10

Type	Description
<b>Product specific devices</b>	
FS-91	Flash adapter
<b>Other devices</b>	
FPS-10	Flash prommer box
PKD-1/PK-1	SW security device
SS-46	Interface adapter
	PC with Phoenix service software
<b>Cables</b>	
XCS-4	Modular cable
CA-35S	Power cable
	USB cable

**CU-4 flash concept with FPS-10**

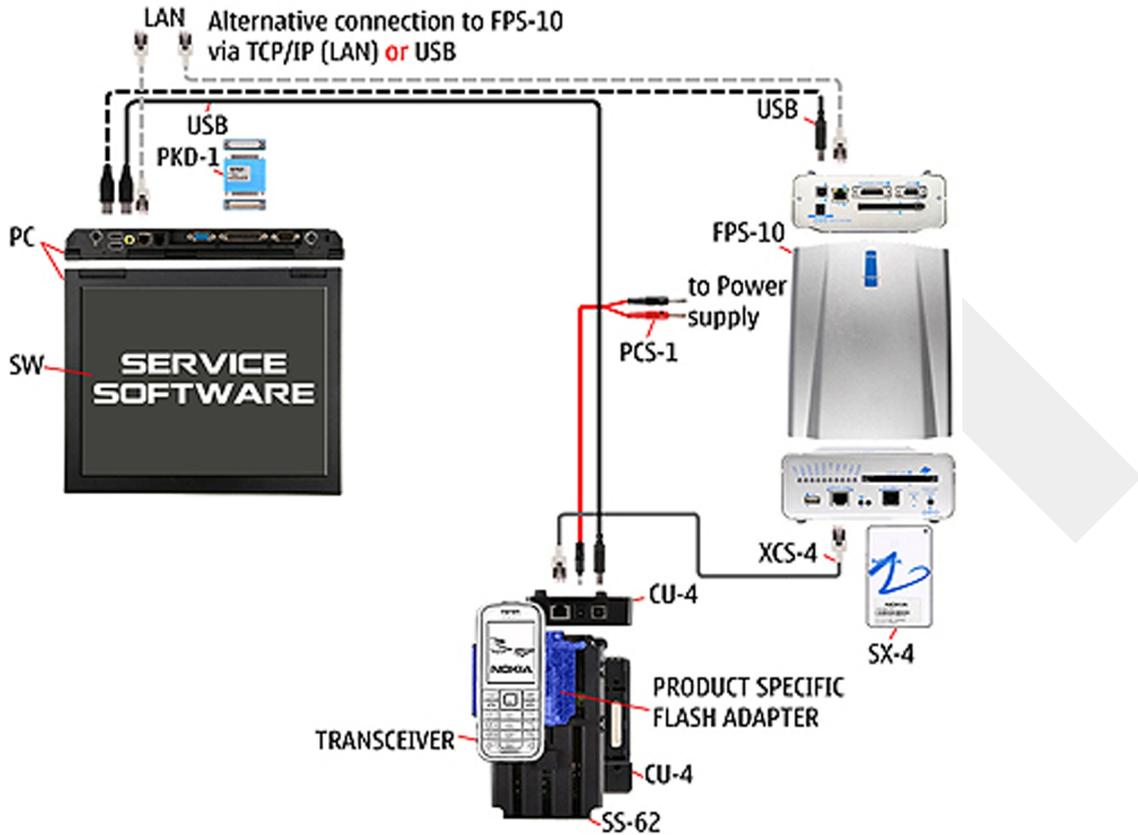


Figure 4 CU-4 flash concept with FPS-10

Type	Description
<b>Product specific devices</b>	
FS-91	Flash adapter
<b>Other devices</b>	
CU-4	Control unit
FPS-10	Flash prommer box
PKD-1/PK-1	SW security device
SS-62	Flash adapter base
SX-4	Smart card
	PC with Phoenix service software
<b>Cables</b>	
PCS-1	Power cable
XCS-4	Modular cable
	Standard USB cable
	USB cable

**Module jig service concept**

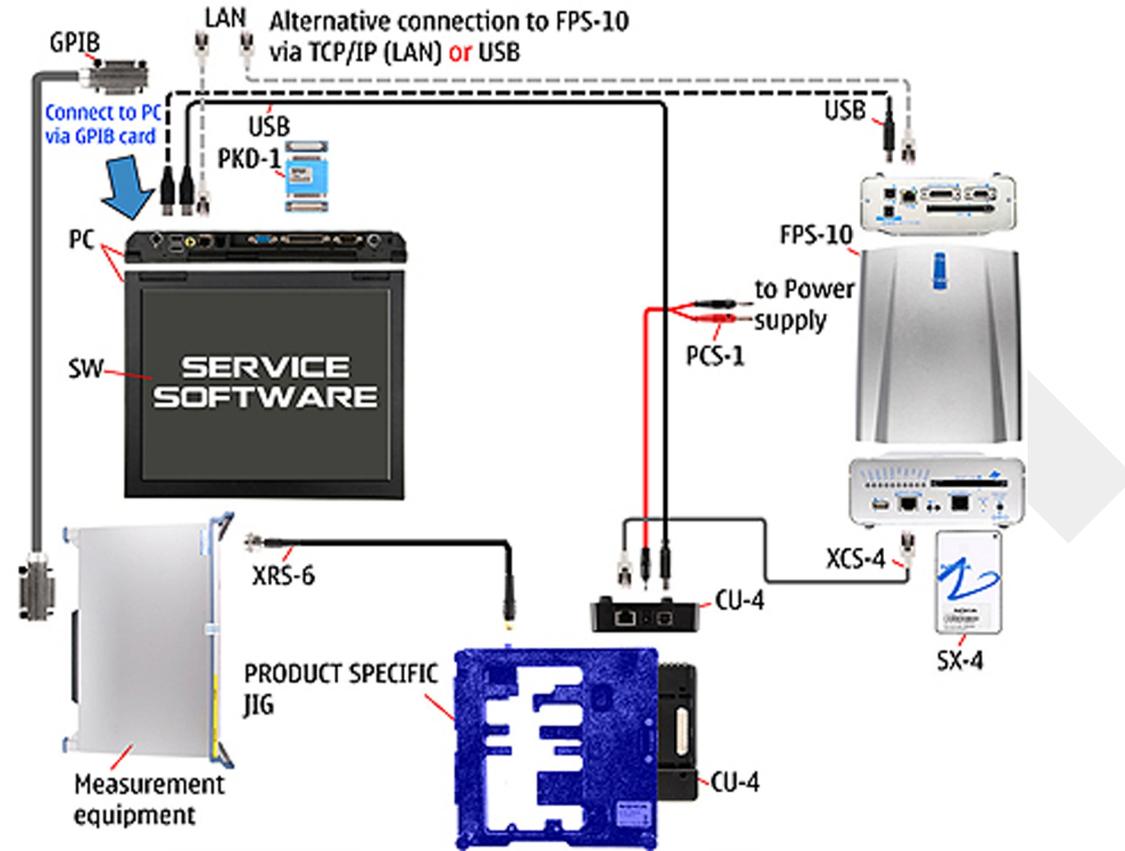


Figure 5 Module jig service concept

Type	Description
<b>Phone specific devices</b>	
MJ-189	Module jig
<b>Other devices</b>	
CU-4	Control unit
FPS-10	Flash prommer box
PK-1	SW security device
SX-4	Smart card
	PC with VPOS and Phoenix service software
	Measurement equipment
<b>Cables</b>	
PCS-1	DC power cable
XCS-4	Modular cable
XRF-1	RF cable
	USB cable

Type	Description
	GPIB control cable

**RF testing concept with RF coupler**

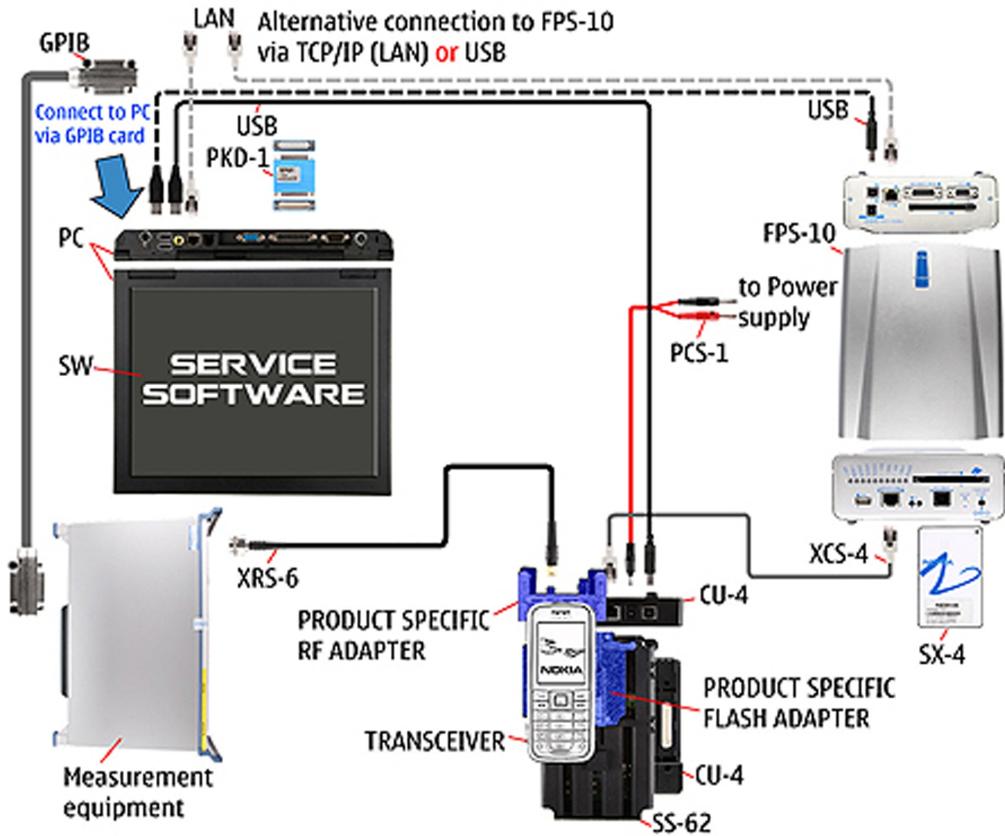


Figure 6 RF testing concept with RF coupler

Type	Description
<b>Product specific devices</b>	
FS-91	Flash adapter
SA-138	RF coupler
<b>Other devices</b>	
CU-4	Control unit
SX-4	Smart card
FPS-10	Flash prommer box
PKD-1/PK-1	SW security device
SS-62	Flash adapter base
	Measurement equipment
	PC with Phoenix service software
<b>Cables</b>	
PCS-1	Power cable

Type	Description
XCS-4	Modular cable
XRS-6	RF cable
	GPIB control cable
	USB cable

**Service concept for RF testing and RF/BB tuning**

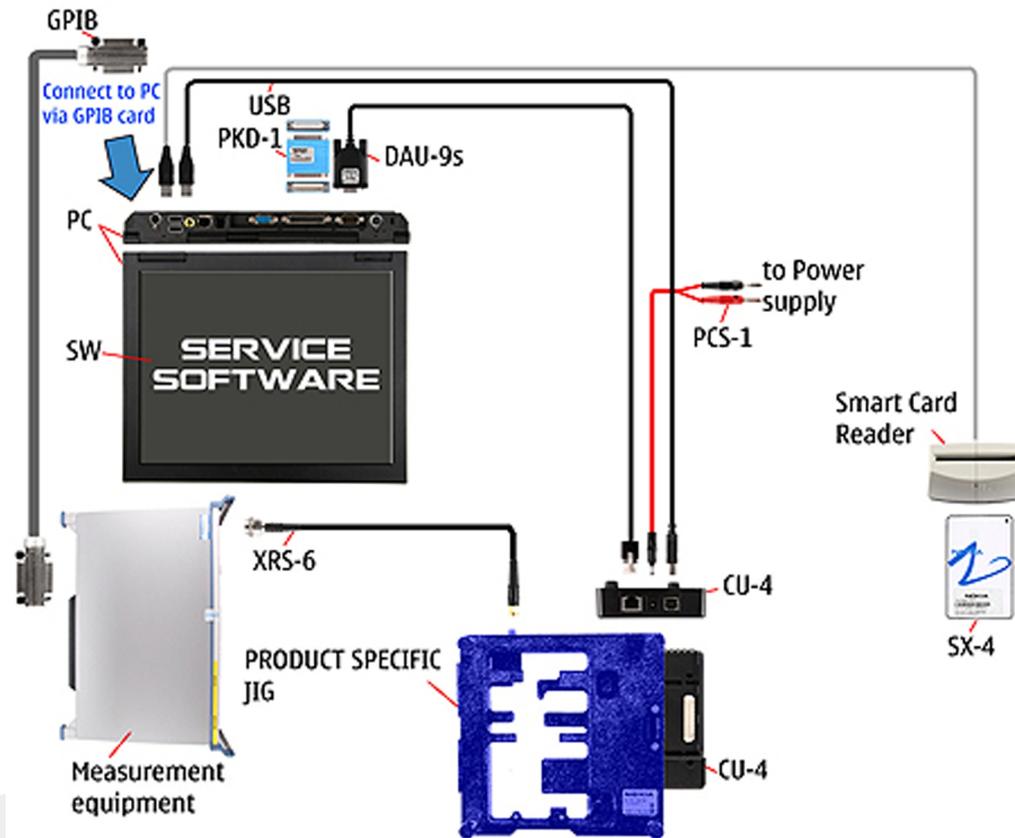


Figure 7 Service concept for RF testing and RF/BB tuning

Type	Description
<b>Product specific devices</b>	
MJ-189	Module jig
<b>Other devices</b>	
CU-4	Control unit
PK-1	SW security device
SX-4	Smart card
	Measurement equipment
	Smart card reader
	PC with Phoenix service software

Type	Description
<b>Cables</b>	
DAU-9S	MBUS cable
PCS-1	DC power cable
XRS-6	RF cable
	GPIB control cable
	USB cable

DRAFT

## **3 — BB Troubleshooting and Manual Tuning Guide**

(This page left intentionally blank.)

## Table of Contents

Baseband self tests in Phoenix .....	3-5
Power and charging troubleshooting .....	3-7
Dead or jammed device troubleshooting .....	3-7
General power checking .....	3-8
Charging troubleshooting .....	3-9
Interface troubleshooting .....	3-11
Flash programming fault troubleshooting .....	3-11
Combo memory troubleshooting .....	3-14
USB interface troubleshooting .....	3-14
SIM card troubleshooting .....	3-16
User interface troubleshooting .....	3-18
Keypad troubleshooting .....	3-18
Display module troubleshooting .....	3-20
General instructions for display troubleshooting .....	3-20
Display troubleshooting .....	3-21
Keyboard backlight troubleshooting .....	3-21
Njoy troubleshooting .....	3-23
SD card troubleshooting .....	3-23
Camera troubleshooting .....	3-25
Camera troubleshooting .....	3-25
Audio troubleshooting .....	3-27
Audio troubleshooting test instructions .....	3-27
Internal earpiece troubleshooting .....	3-31
Internal microphone troubleshooting .....	3-31
Internal handsfree (IHF) troubleshooting .....	3-32
External earpiece troubleshooting .....	3-33
External microphone troubleshooting .....	3-34
Vibra troubleshooting .....	3-35
Baseband manual tuning guide .....	3-37
Certificate restoring for BB5 products .....	3-37
Energy management calibration .....	3-42

### List of Tables

Table 4 Display module troubleshooting cases .....	3-20
Table 5 Pixel defects .....	3-20
Table 6 Calibration value limits .....	3-42

### List of Figures

Figure 8 Flashing pic 1. Take single trig measurement for the rise of the BSI signal .....	3-12
Figure 9 Flashing pic 2. Take single trig measurement for the rise of the BSI signal .....	3-13
Figure 10 Single-ended output waveform of the Ext_in_HP_out measurement when earpiece is connected. ....	3-29
Figure 11 Differential output waveform of the Ext_in_IHF_out out loop measurement when speaker is connected. ....	3-29
Figure 12 Single-ended output waveform of the HP_in_Ext_out loop when microphone is connected. ....	3-30

(This page left intentionally blank.)


## ■ Baseband self tests in Phoenix

### Context

Always start the troubleshooting procedure by running the Phoenix self tests. If a test fails, please follow the diagram below.

If the phone is dead and you cannot perform the self tests, go to *Dead or jammed device troubleshooting*.


## Troubleshooting flow

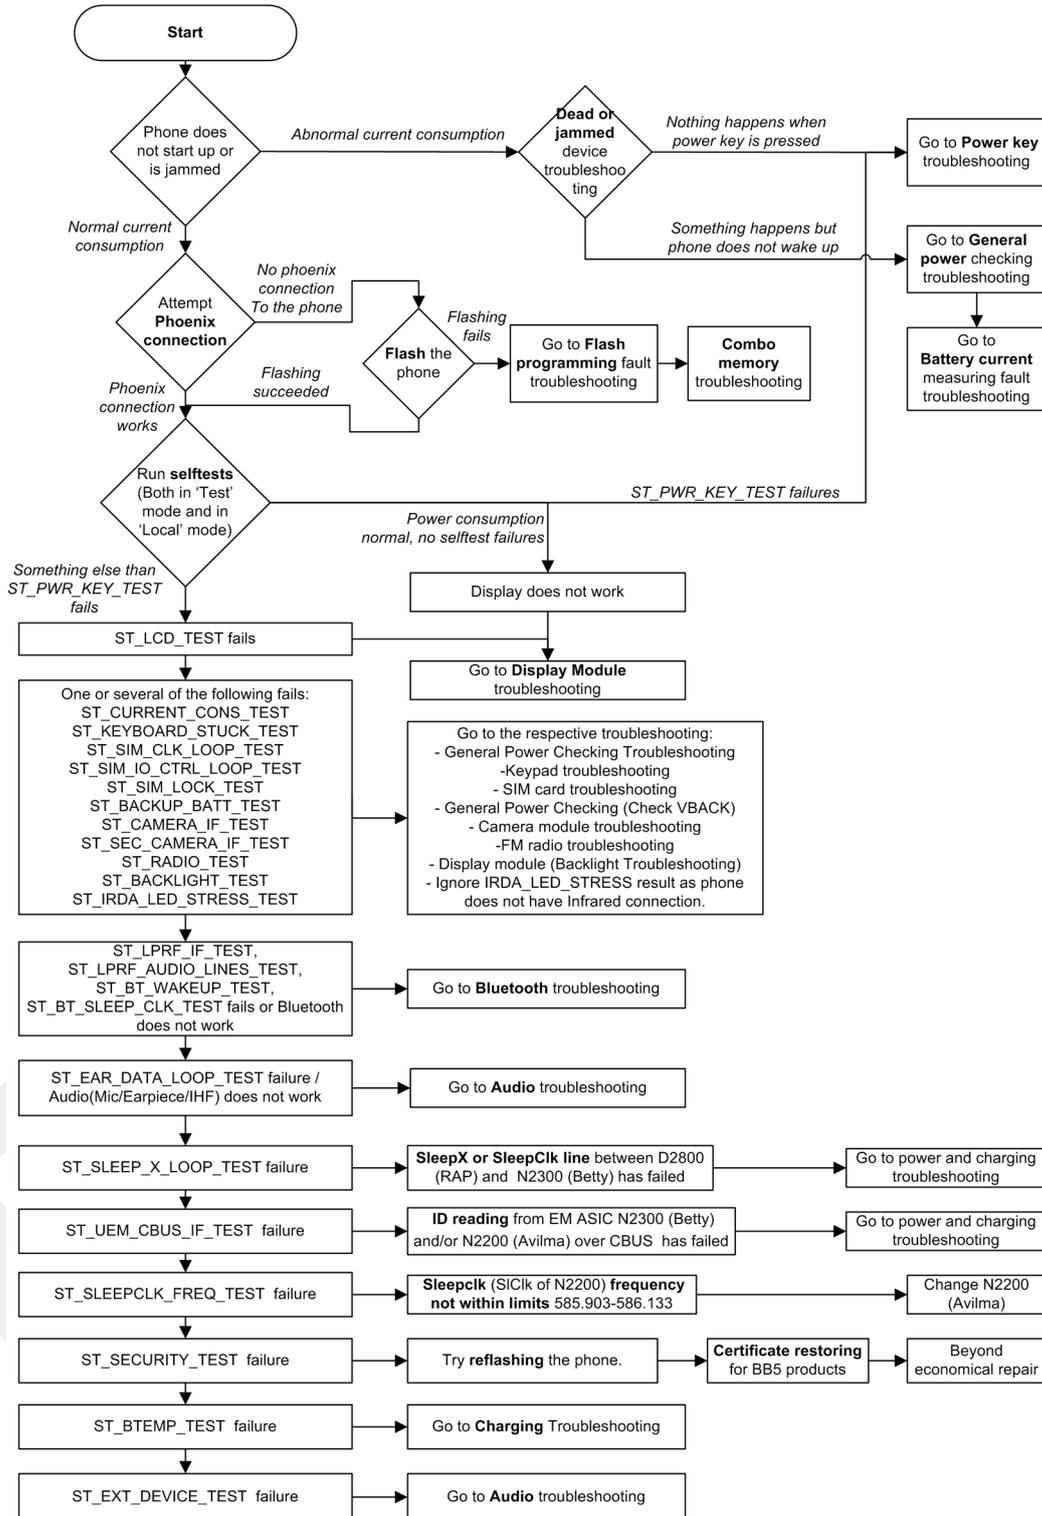


■ Power and charging troubleshooting

Dead or jammed device troubleshooting

Troubleshooting flow

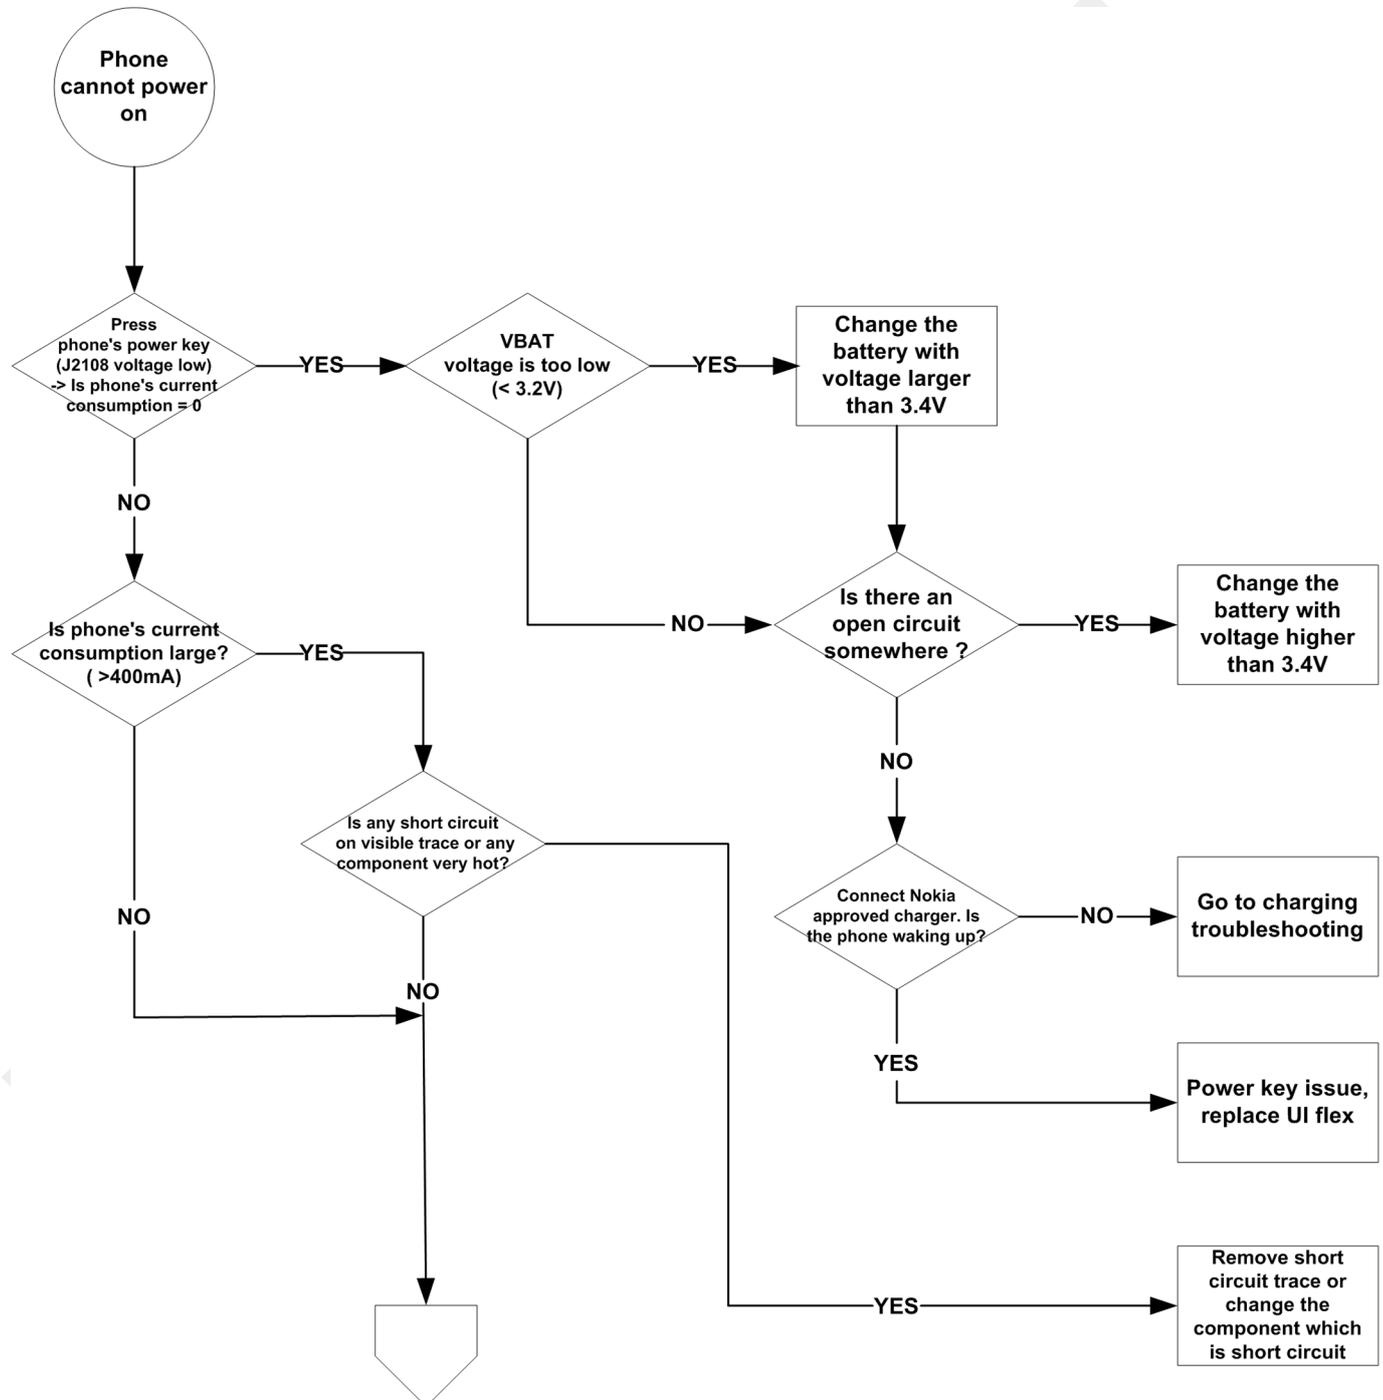

**Troubleshooting flow**

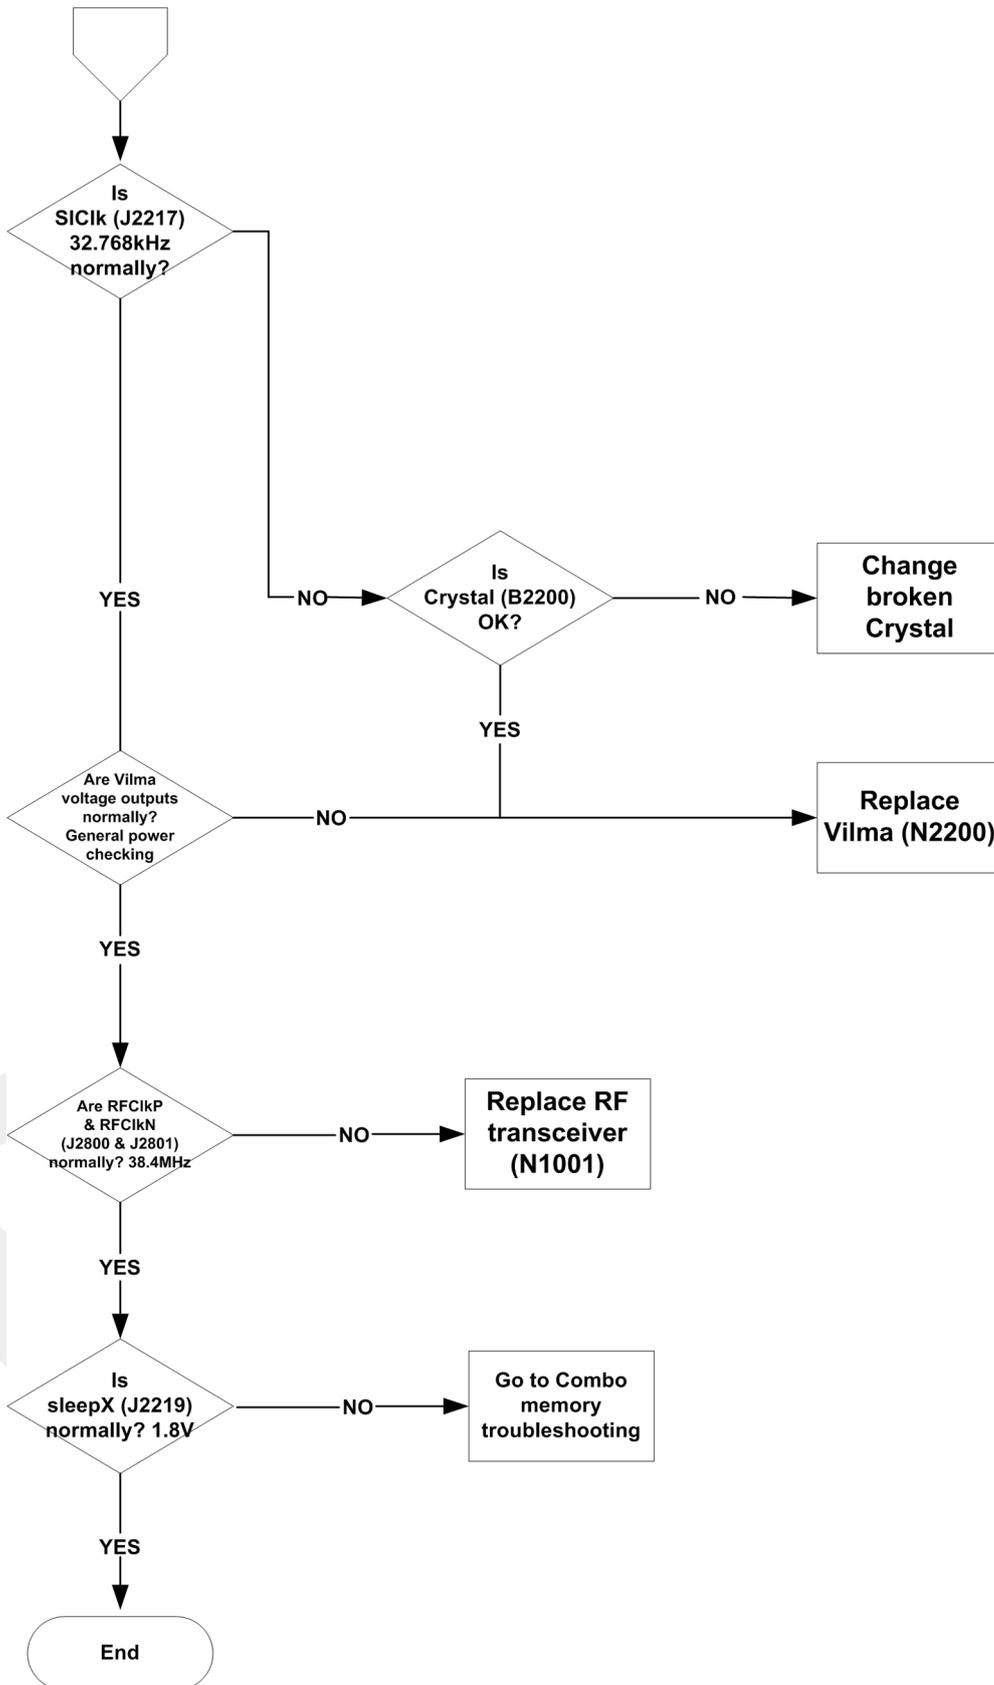


## General power checking

Check the following voltages:

Signal name	Regulator	Sleep	Idle	Nominal voltage	Main user	Notes
VIO	AVILMA	ON	ON	1.82	Memory, I/Os, Display	
VBACK	AVILMA	ON	ON	2.5	Back-up battery	
VSIM1	AVILM	ON	ON	1.8/3.0	SIM card	
VDRAM	AVILMA	ON	ON	1.82	SDRAM	
VAUX	AVILMA	OFF	OFF	2.5	Camera, Display	
VR1	AVILMA	OFF	ON	2.5	Crystal oscillators, RFIC	
VRFC	AVILMA	OFF	ON	1.8	RAPs converters	
VRCP1	AVILMA			4.75	To RF parts	RF active
VREF	AVILMA	ON	ON	1.35	RF reference	
VCORE	BETTY	ON	ON	1.05 1.25 1.35 1.40	Combo memory	
VOUT	BETTY	OFF	OFF	2.5		Accessory connected
VSIM2	AVILMA	OFF	OFF	2.2	Internal microphone	

## Charging troubleshooting



### Troubleshooting flow

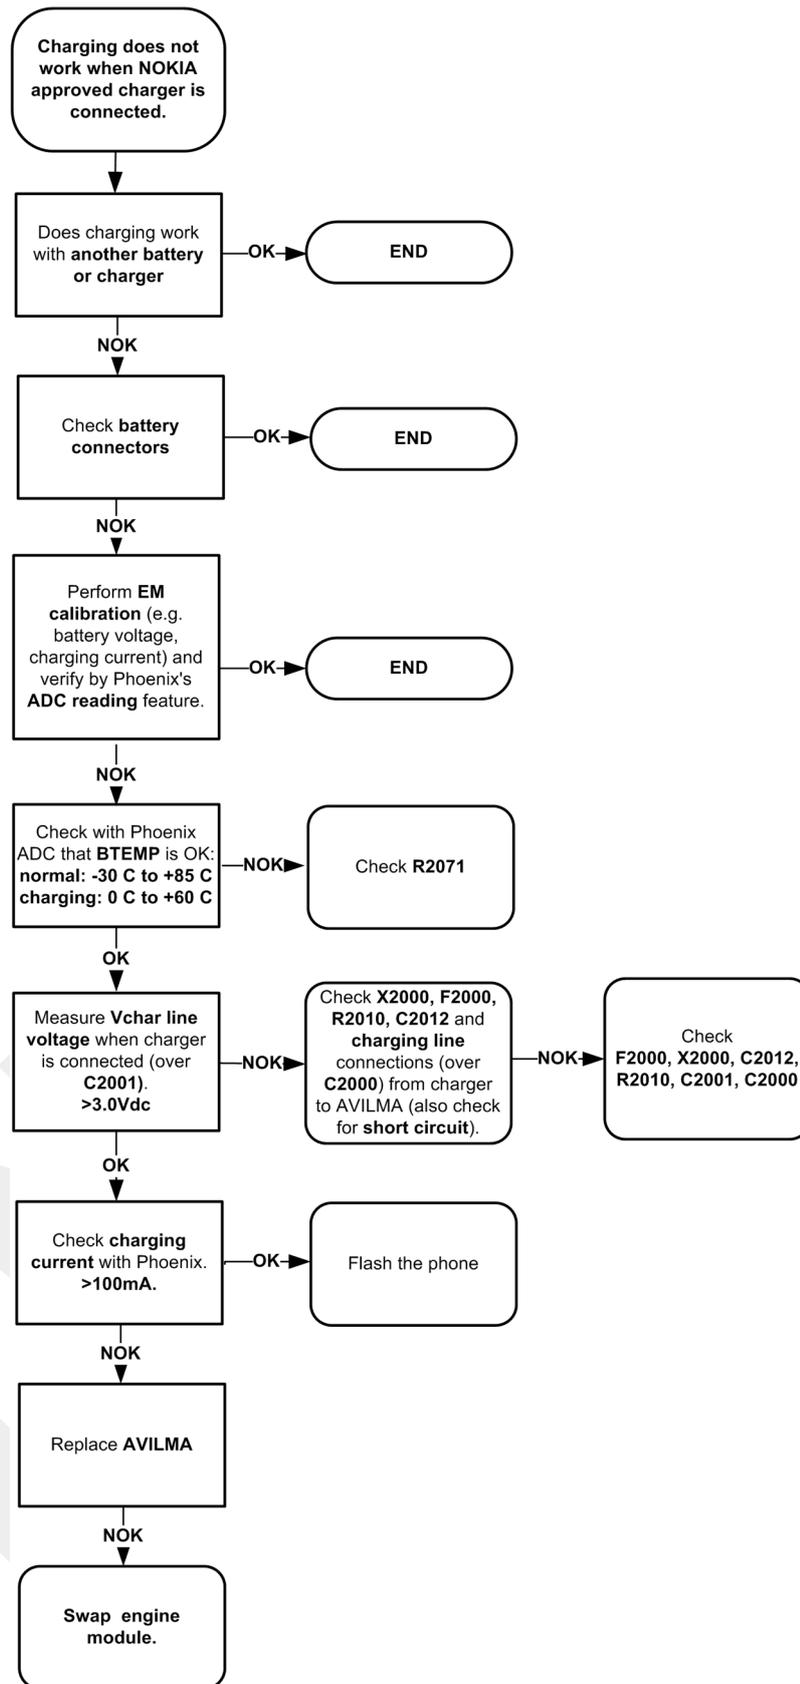

■ **Interface troubleshooting**

**Flash programming fault troubleshooting**

**Part 1**

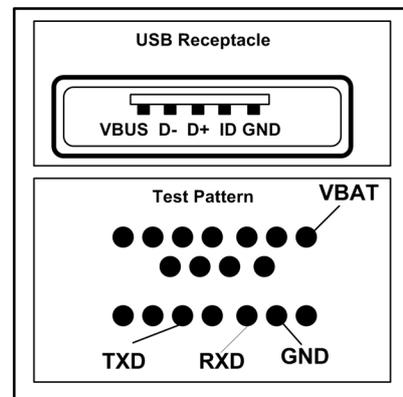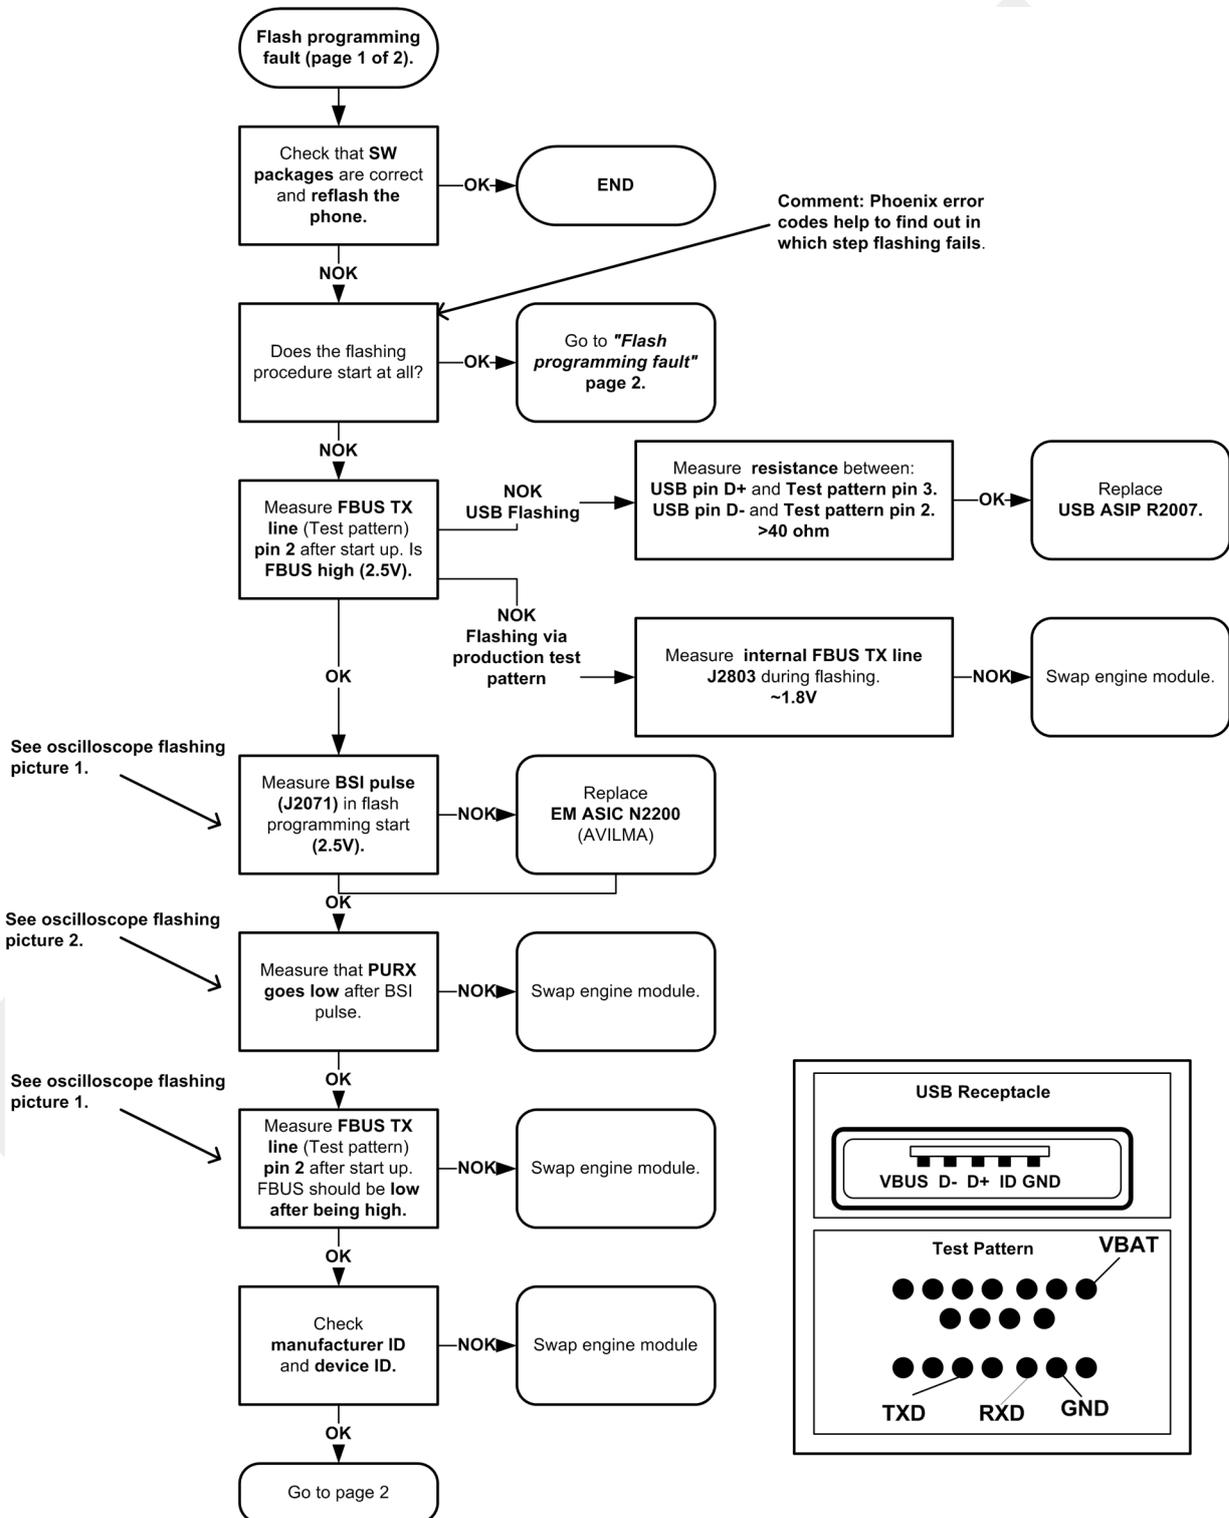

Part 2

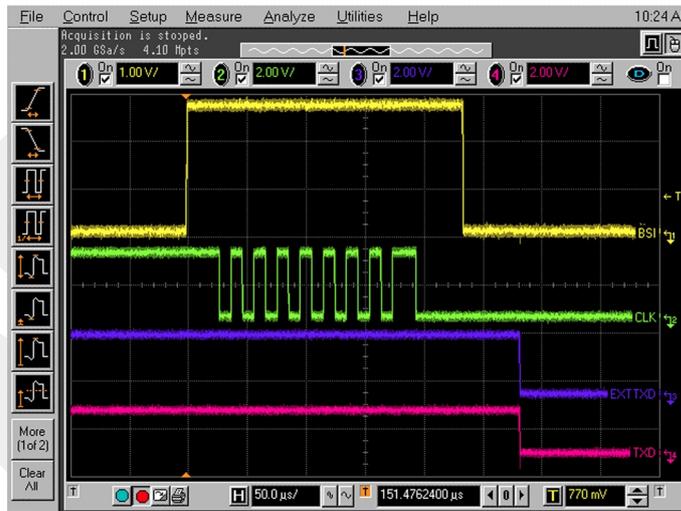
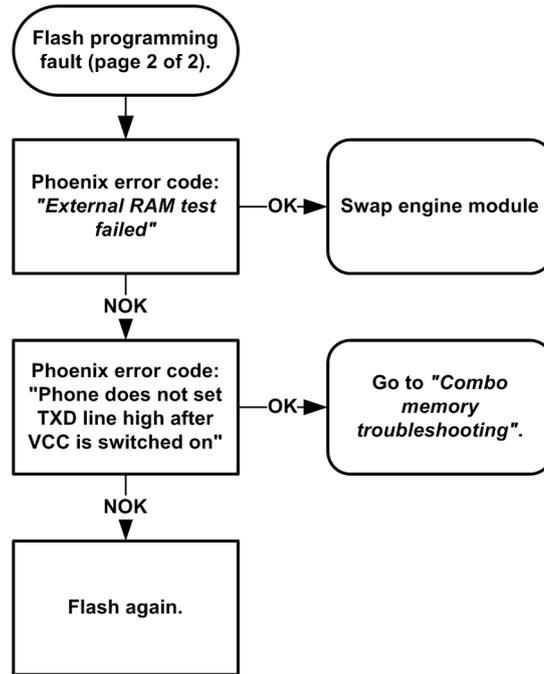


Figure 8 Flashing pic 1. Take single trig measurement for the rise of the BSI signal.


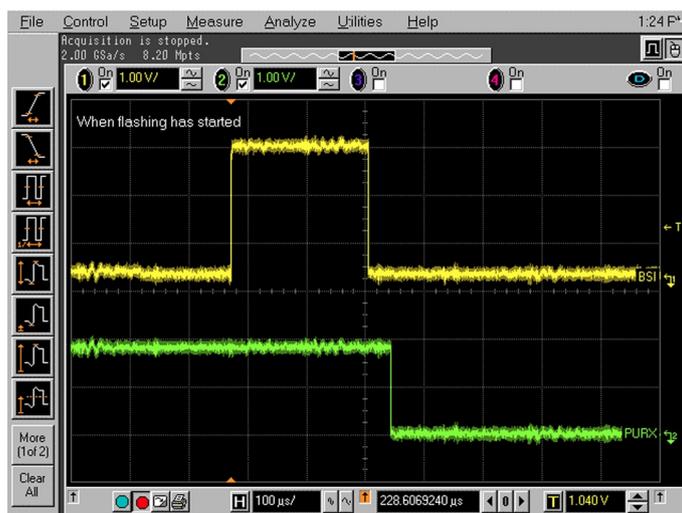


Figure 9 Flashing pic 2. Take single trig measurement for the rise of the BSI signal.




**Combo memory troubleshooting**

**Troubleshooting flow**

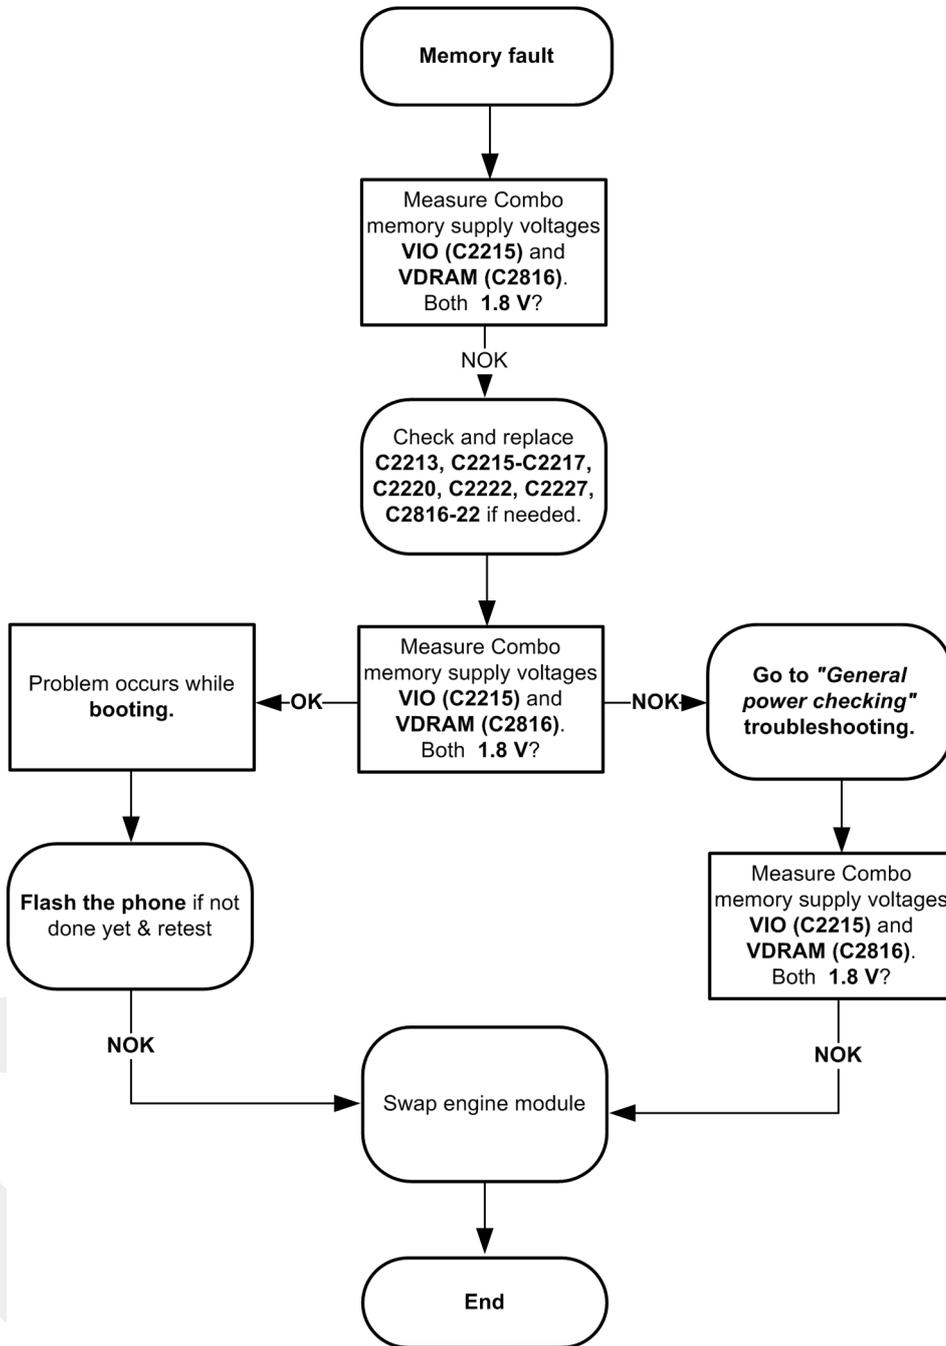


**USB interface troubleshooting**



**Troubleshooting flow**

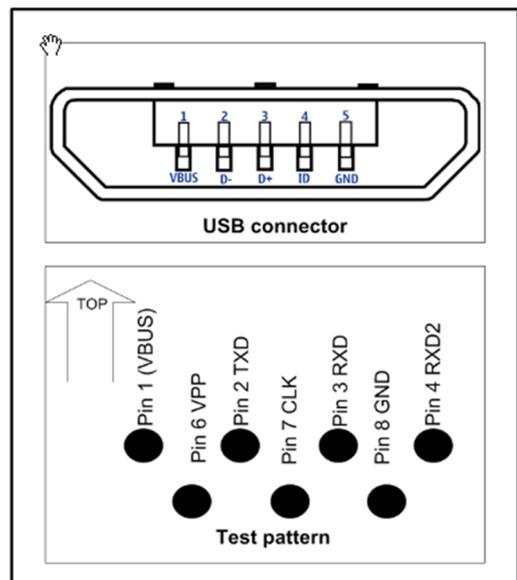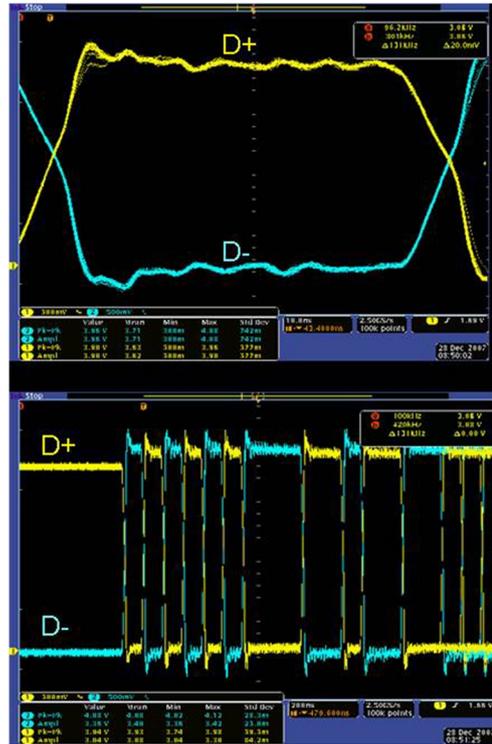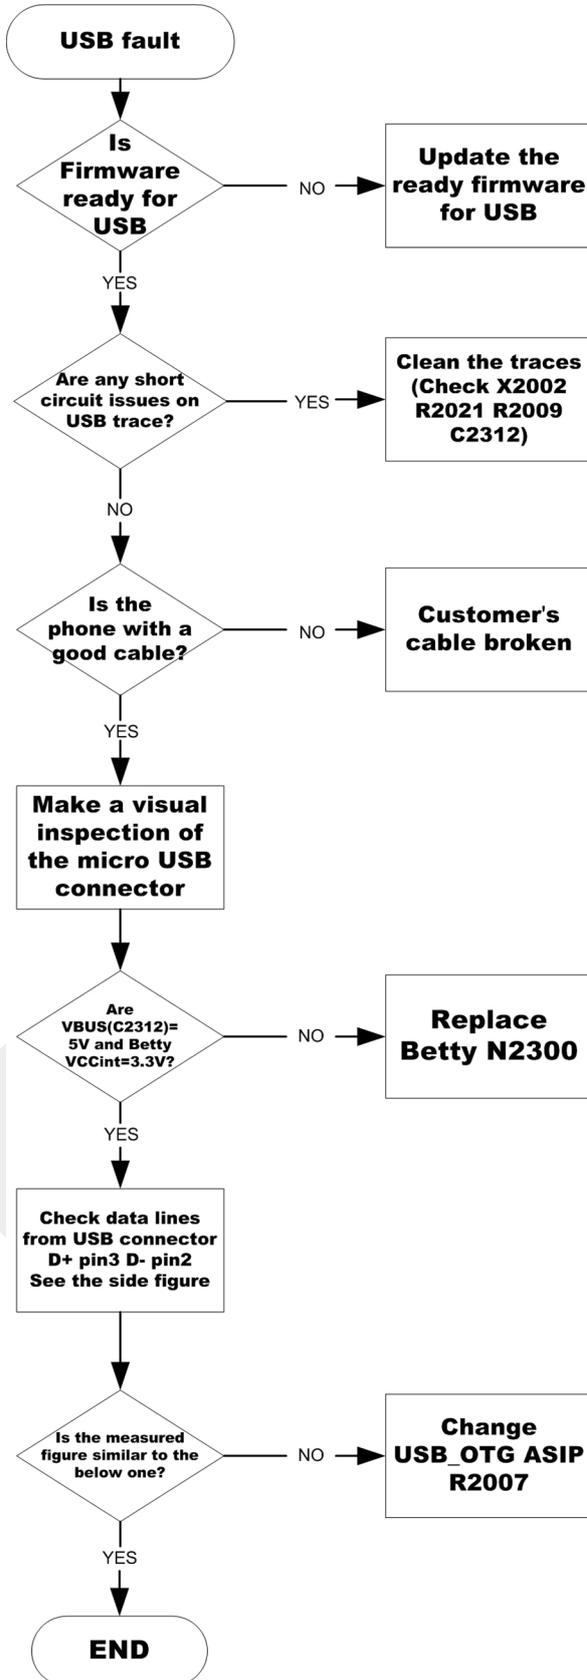

## SIM card troubleshooting

### Troubleshooting flow

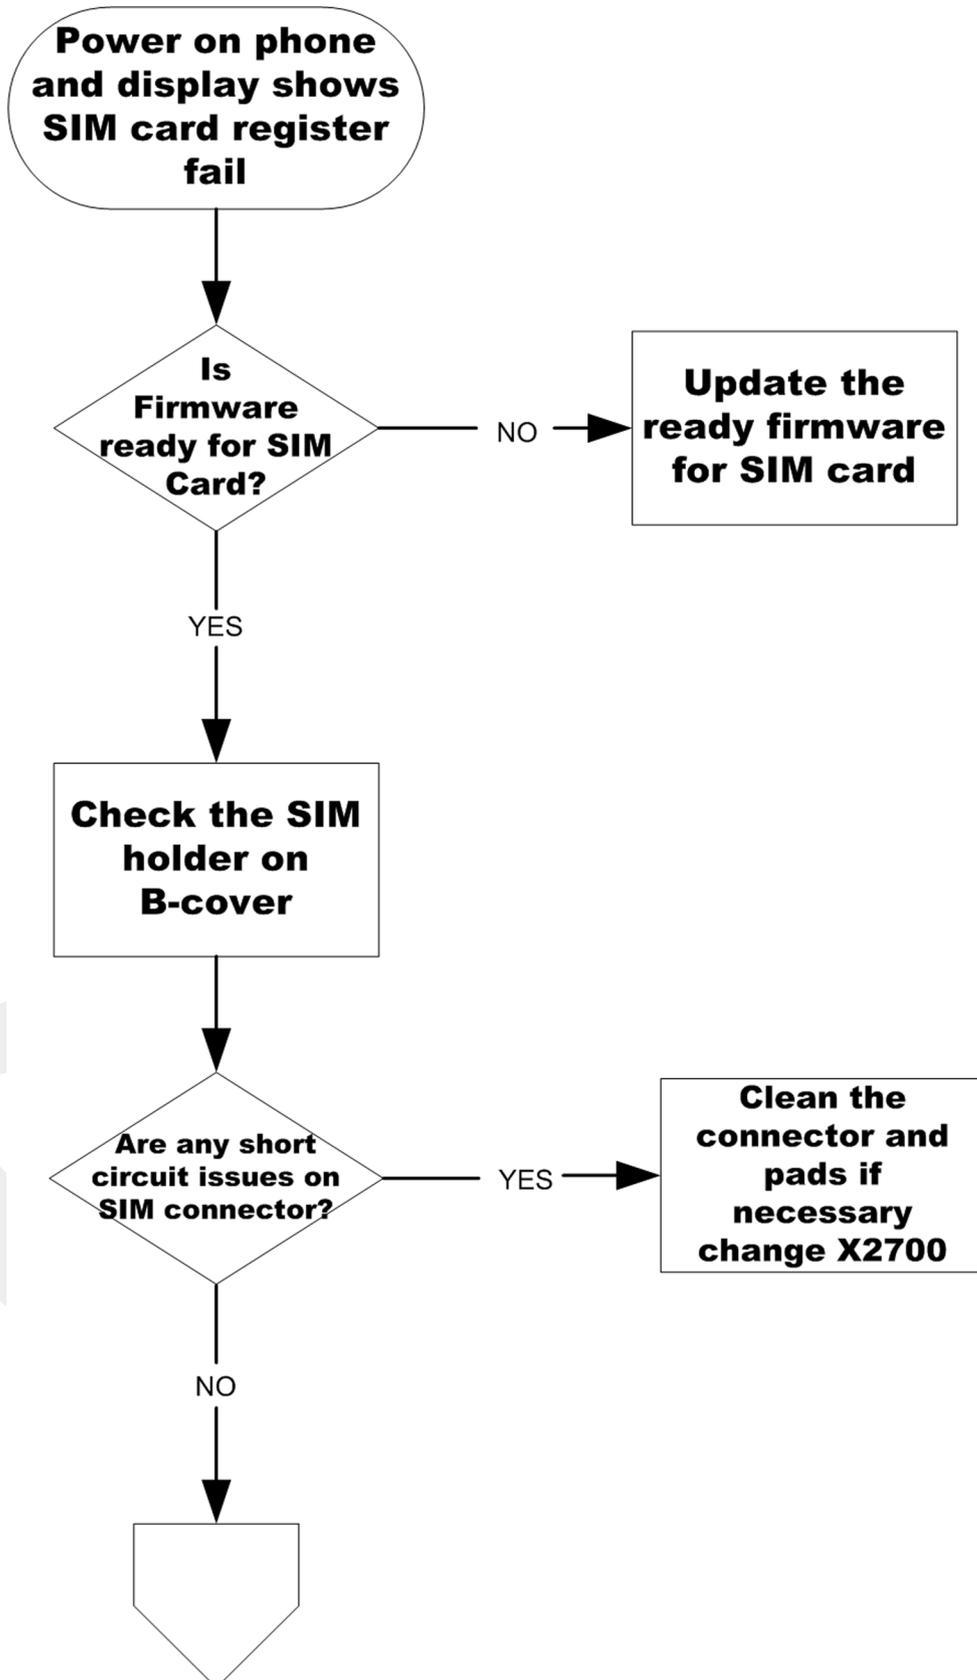

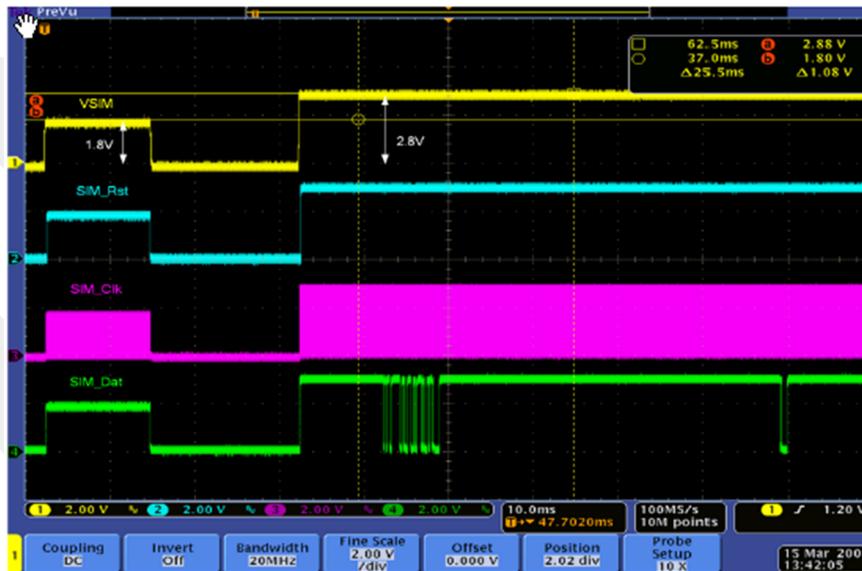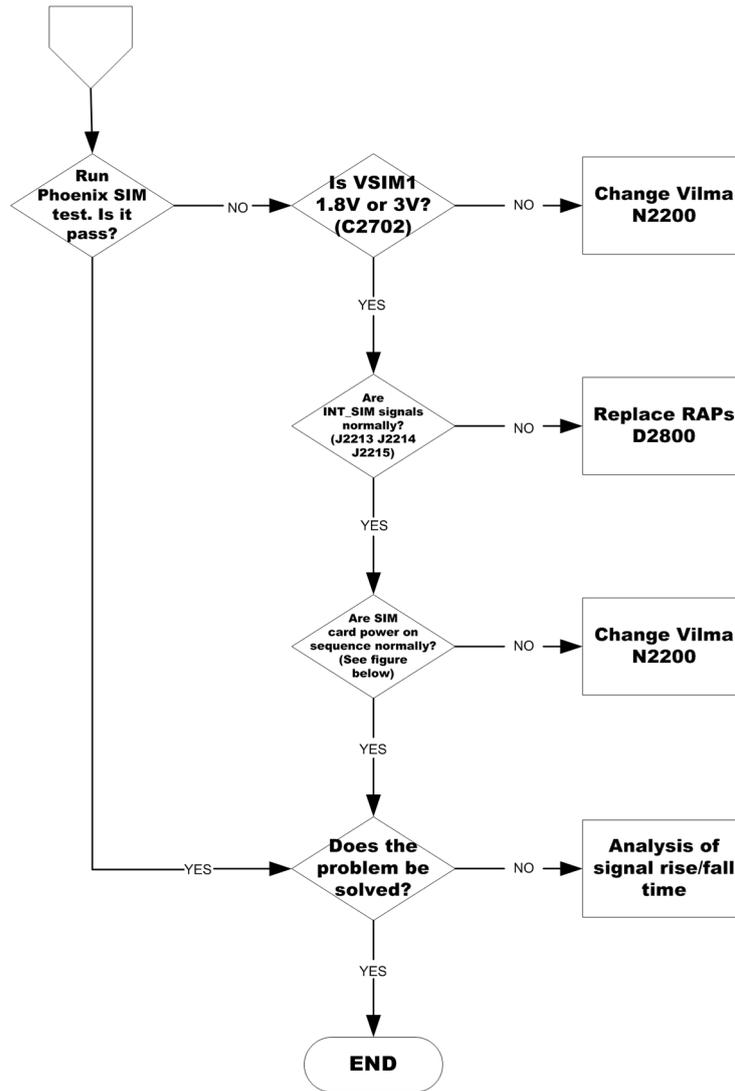

## ■ User interface troubleshooting

### Keypad troubleshooting


#### Context

There are two possible failure modes in the keyboard module:

- One or more keys are stuck, so that the key does not react when a keydome is pressed. This kind of failure is caused by mechanical reasons (dirt, rust, mechanical damage, etc.)
- Malfunction of several keys at the same time; this happens when one or more rows or columns in the key matrix are failing (shortcut or open connection).

If the failure mode is not clear, start with the Keyboard test in Phoenix.

### Troubleshooting flow

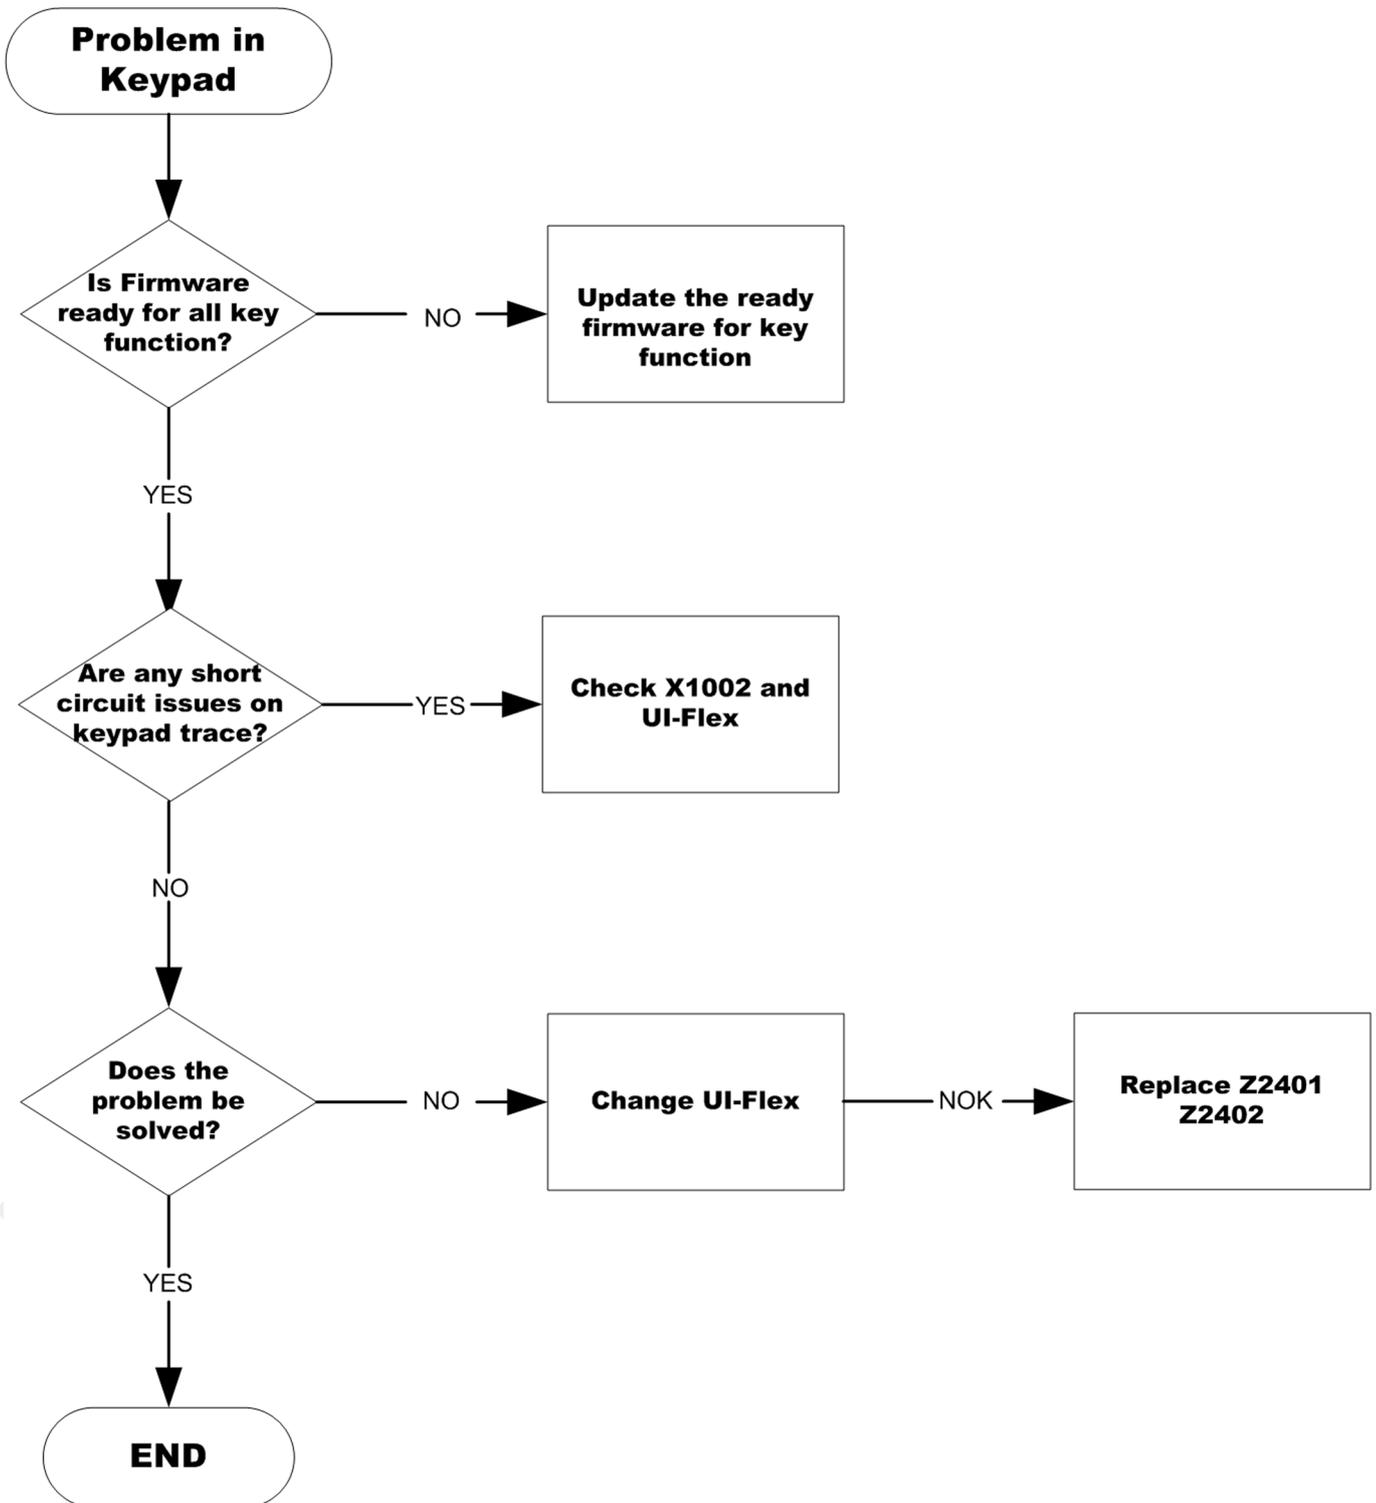

## Display module troubleshooting

### General instructions for display troubleshooting

#### Context

- The display is in a normal mode when the phone is in active use.
- Display is in a partial idle mode when the phone is in the screen saver mode.
- The operating modes of the display can be controlled with the help of *Phoenix*.

**Table 4 Display module troubleshooting cases**


Display blank	There is no image on the display. The display looks the same when the phone is on as it does when the phone is off. The backlight can be on in some cases.
Image on the display not correct	Image on the display can be corrupted or a part of the image can be missing. If a part of the image is missing, change the display module. If the image is otherwise corrupted, follow the appropriate troubleshooting diagram.
Visual defects (pixel)	Pixel defects can be checked by controlling the display with Phoenix. Use both colours, black and white, on a full screen.  The display may have some random pixel defects that are acceptable for this type of display. The criteria when pixel defects are regarded as a display failure, resulting in a replacement of the display, are presented the following table.

**Table 5 Pixel defects**

Item		White dot defect				Black dot defect	Total
		R	G	B	White Dot Total		
1	Defect counts	1	1	1	1	1	1
2	Combined defect counts	Not allowed. Two single dot defects that are within 5 mm of each other should be interpreted as combined dot defect.					


*Display troubleshooting*

**Troubleshooting flow**

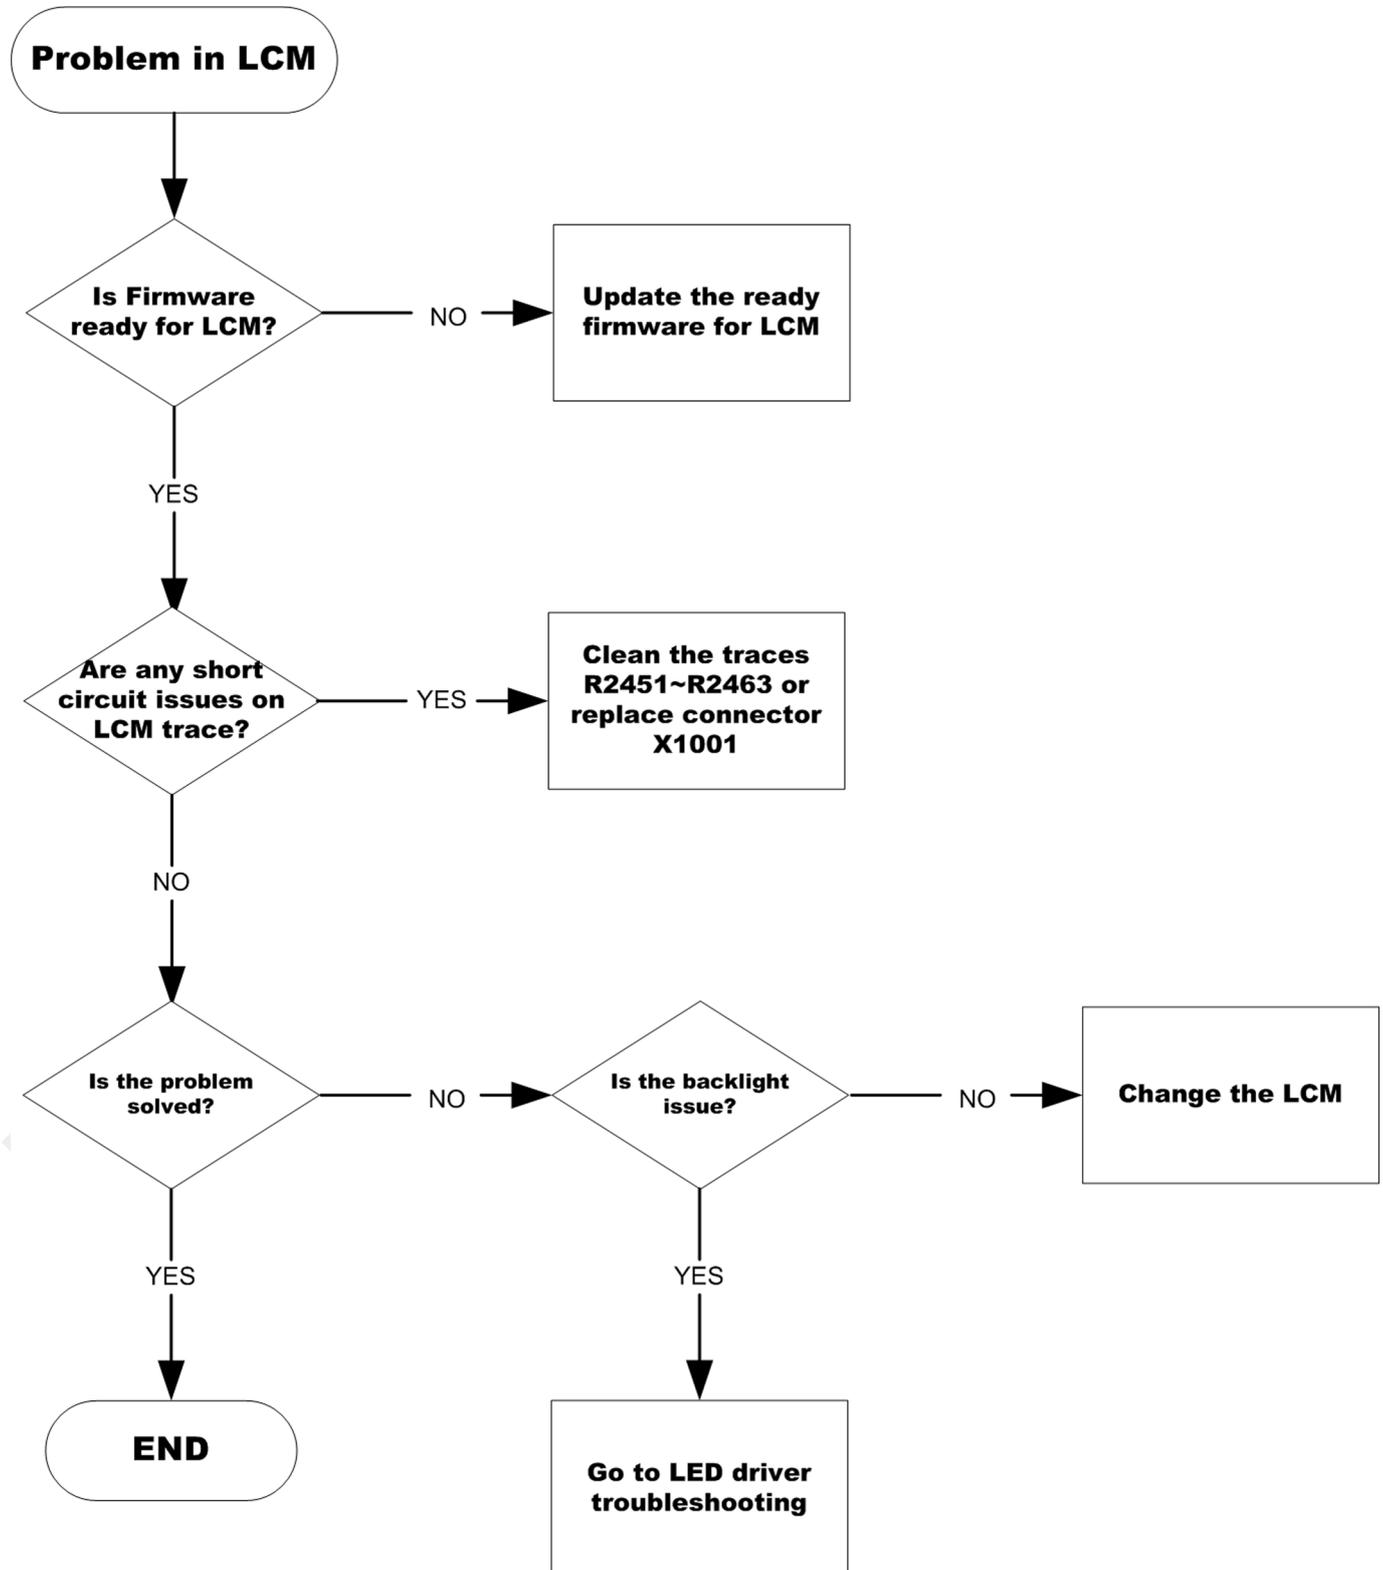


**Keyboard backlight troubleshooting**

**Troubleshooting flow**

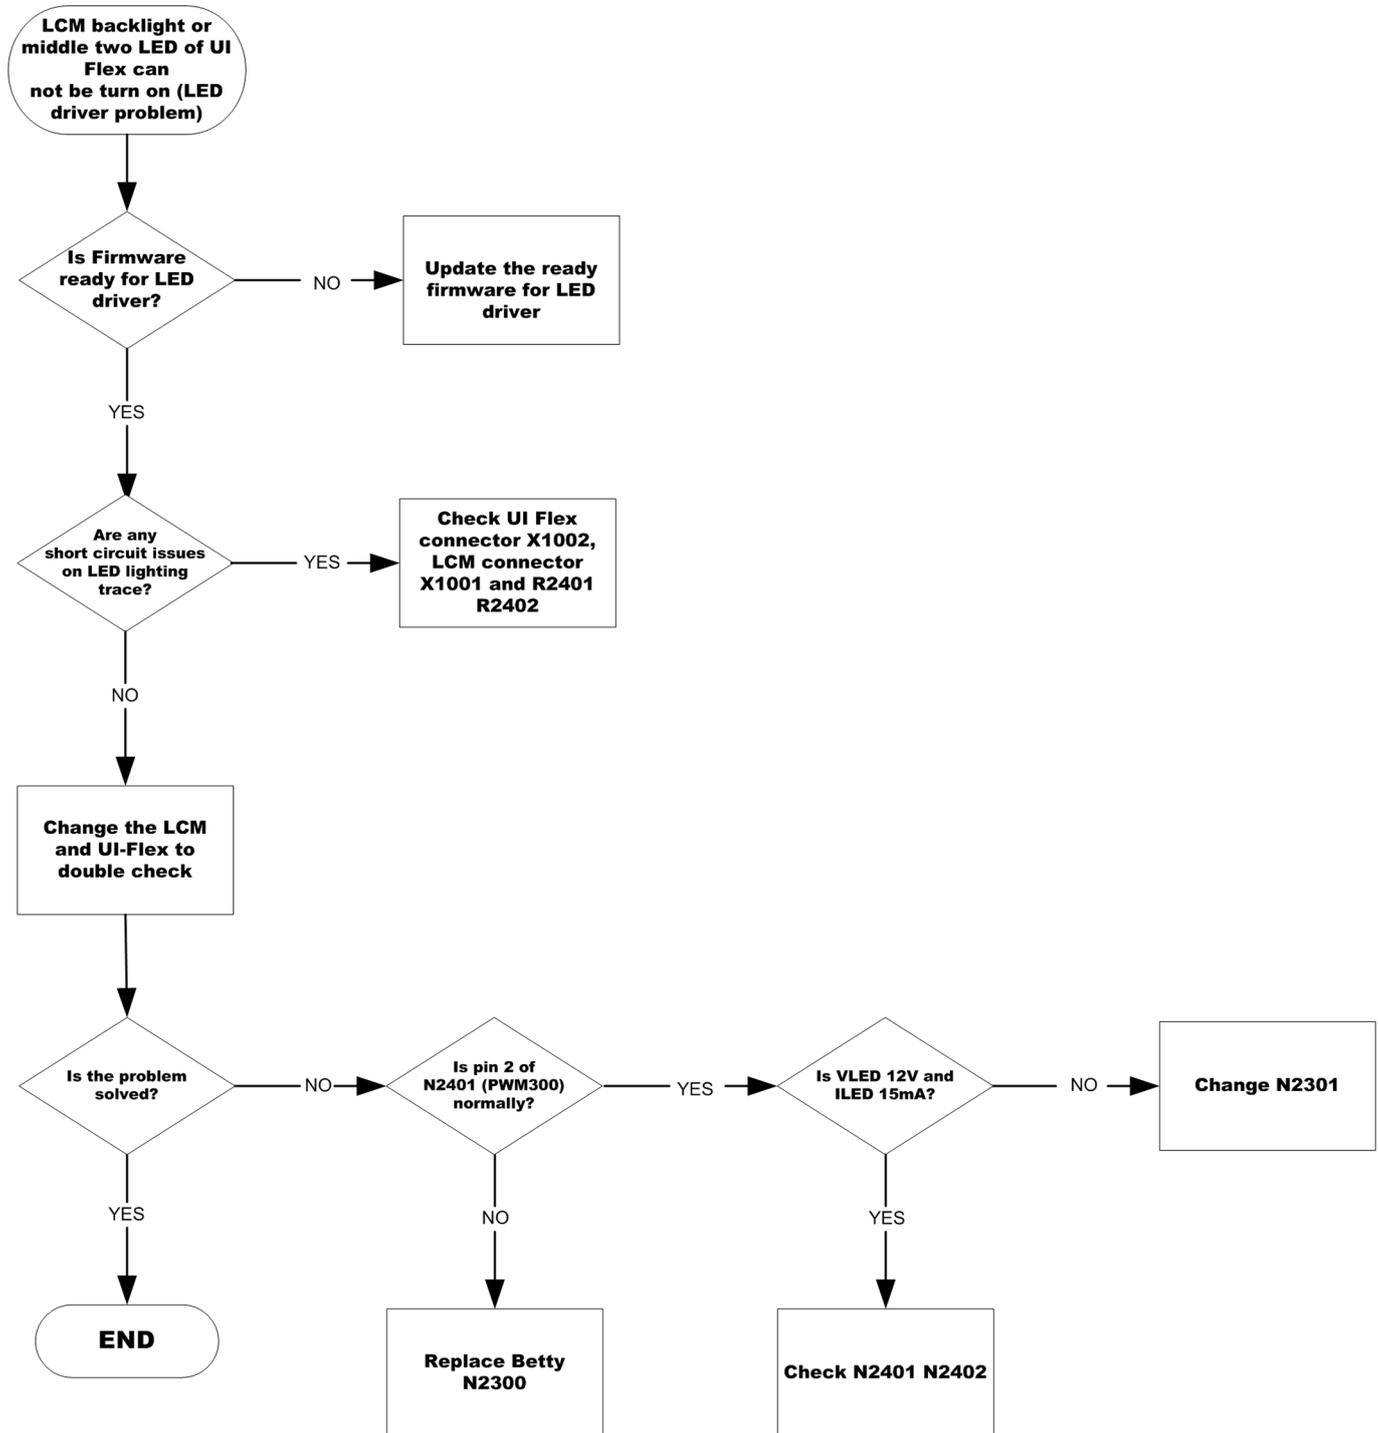



*Njoy troubleshooting*

**Troubleshooting flow**

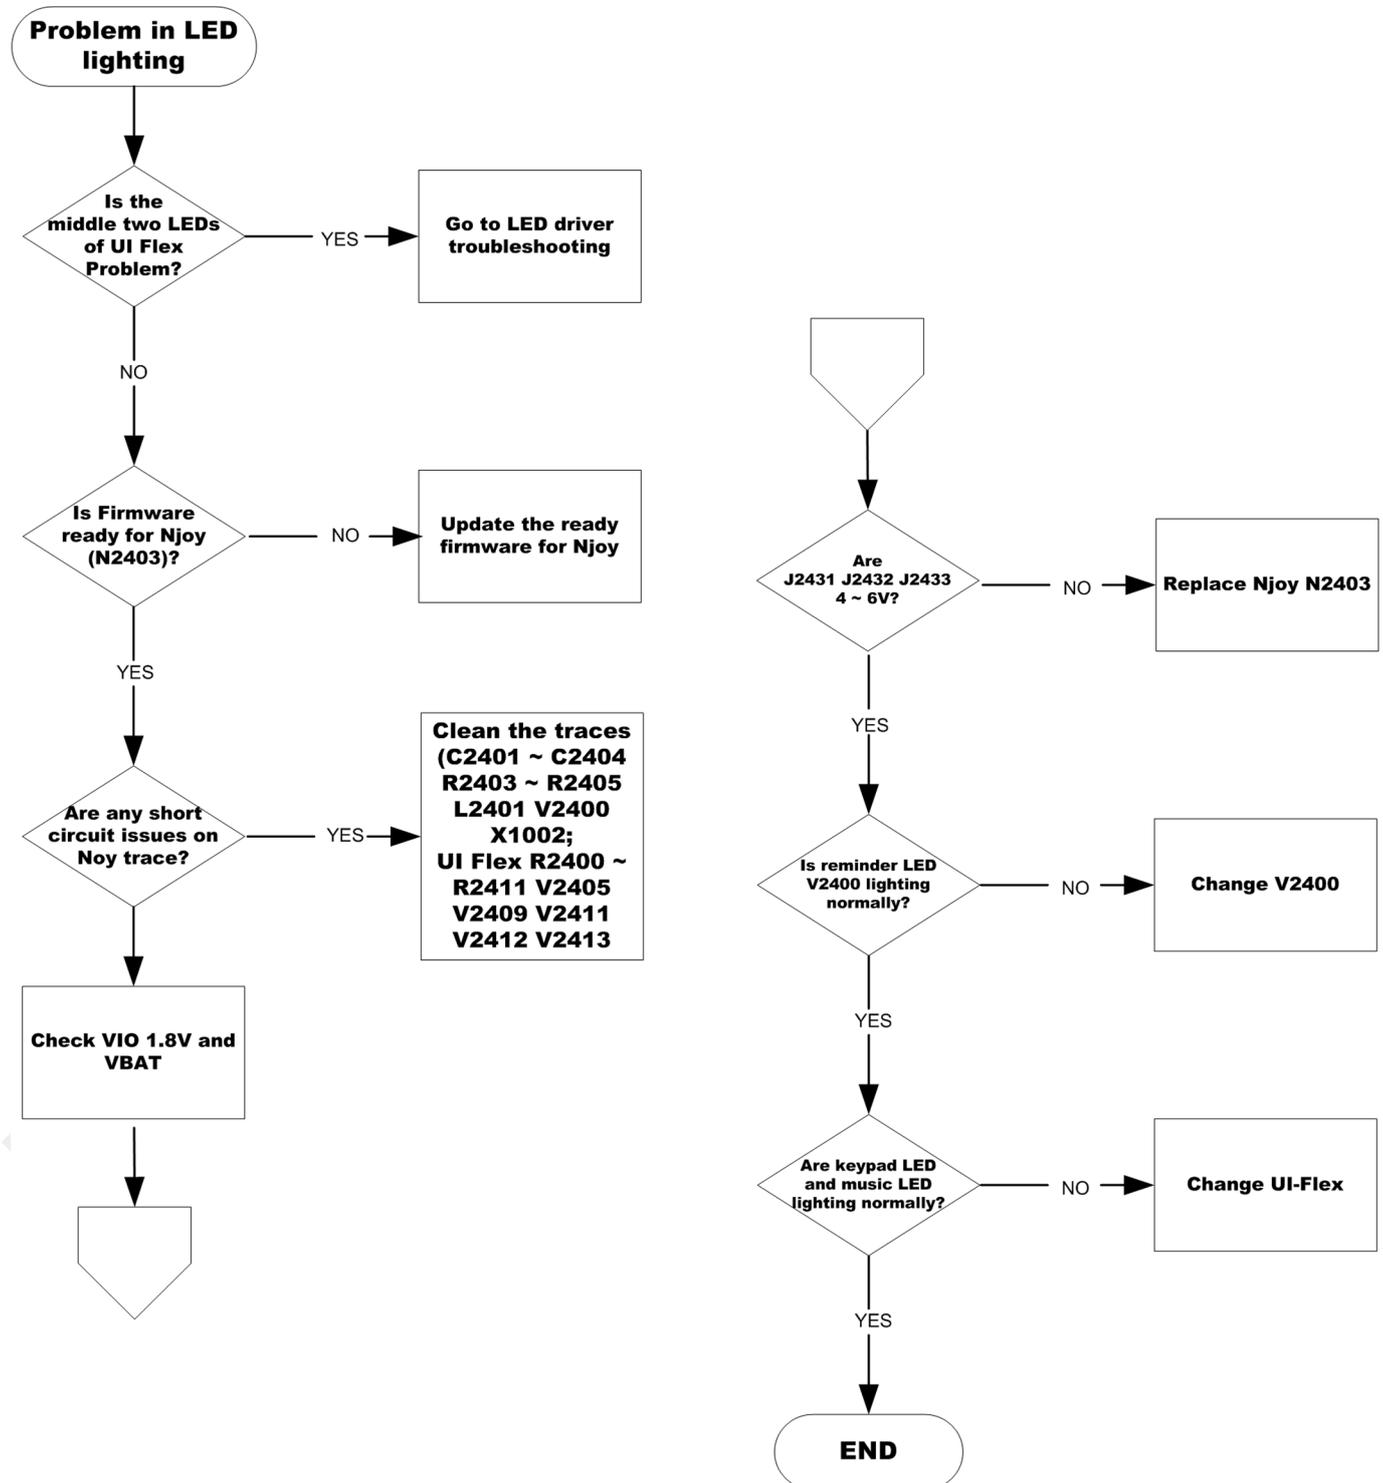

**SD card troubleshooting**


**Troubleshooting flow**

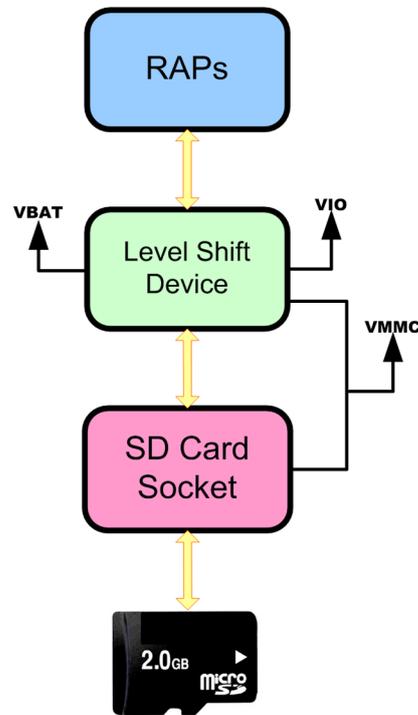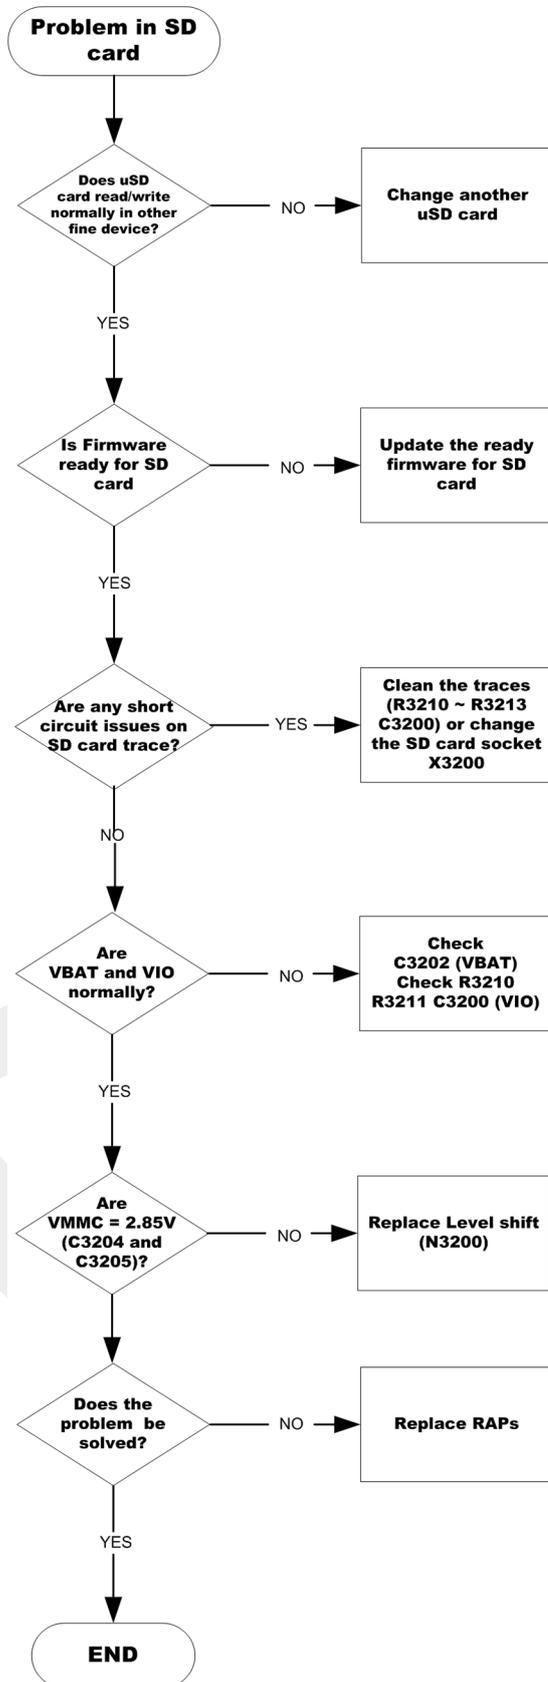


## ■ Camera troubleshooting

### Camera troubleshooting

#### Troubleshooting flow

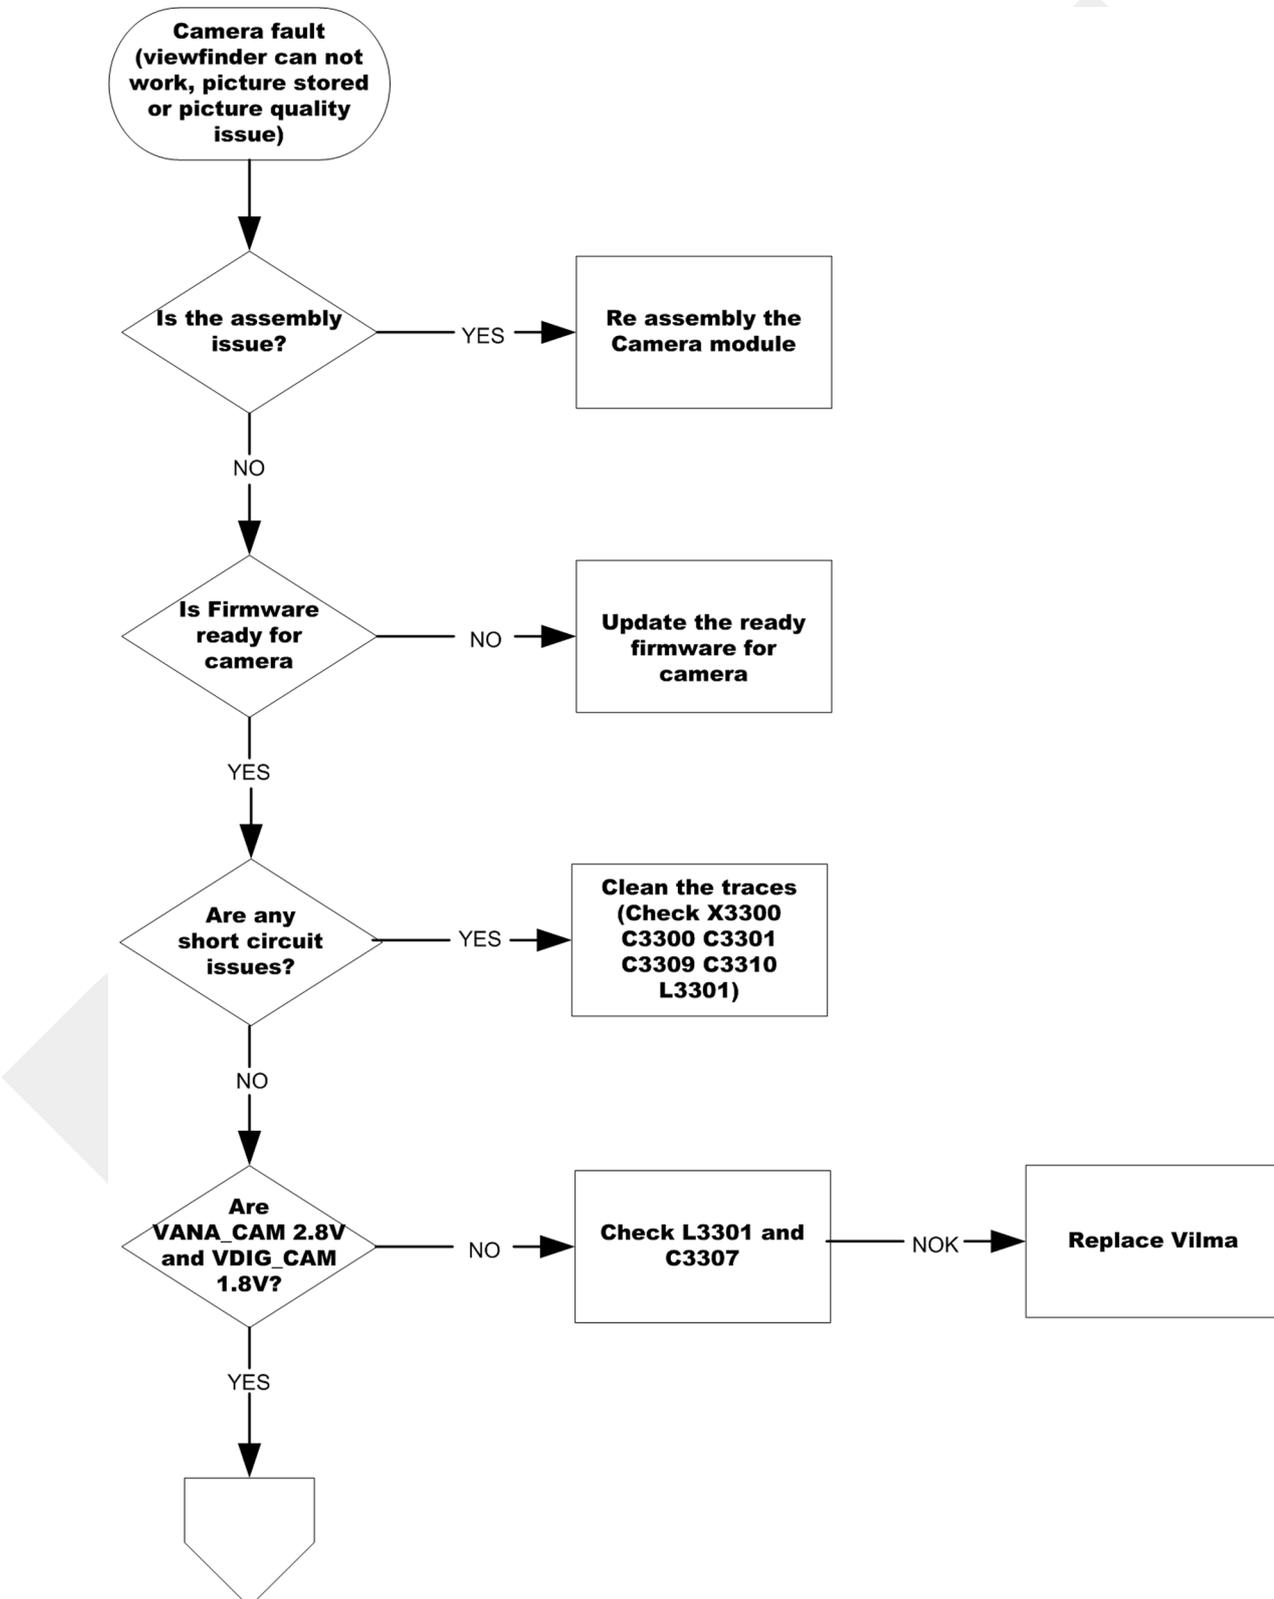

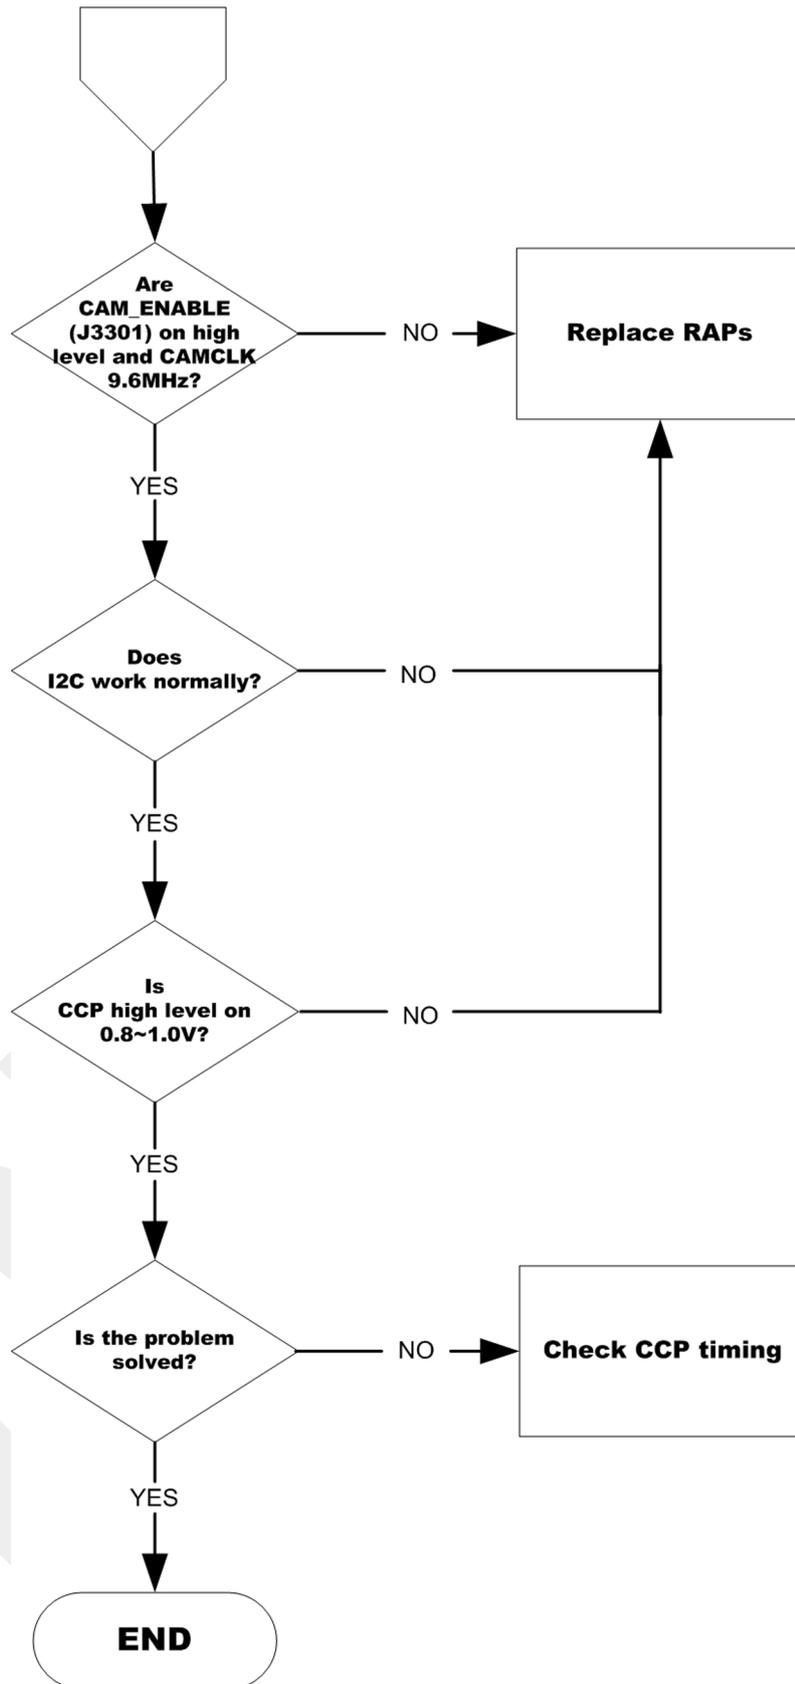

## ■ Audio troubleshooting

### Audio troubleshooting test instructions

Differential external earpiece and internal earpiece outputs can be measured either with a single-ended or a differential probe.

When measuring with a single-ended probe each output is measured against the ground.

Internal handsfree output is measured using a current probe, if a special low-pass filter designed for measuring a digital amplifier is not available. Note also that when using a current probe, the input signal frequency must be set to 2kHz.

The input signal for each loop test can be either single-ended or differential.

### Required equipment

The following equipment is needed for the tests:

- Oscilloscope
- Function generator (sine waveform)
- 'Active speaker' or 'speaker and power amplifier'
- Sound level meter
- Current probe (Internal handsfree DPMA output measurement)
- Phoenix service software
- Battery voltage 3.7V

### Test procedure

Audio can be tested using the Phoenix audio routings option. Three different audio loop paths can be activated:

- External microphone to Internal earpiece
- External microphone to Internal handsfree speaker
- Internal microphone to External earpiece

Each audio loop sets routing from the specified input to the specified output enabling a quick in-out test. Loop path gains are fixed and they cannot be changed using Phoenix. Correct pins and signals for each test are presented in the following table.

### Phoenix audio loop tests and test results

The results presented in the table apply when no accessory is connected and battery voltage is set to 3.7V. Earpiece, internal microphone and speaker are in place during measurement. Applying a headset accessory during measurement causes a significant drop in measured quantities.

The gain values presented in the table apply for a differential output vs. single-ended/differential input.

Loop test	Input terminal	Output terminal	Path gain [dB] (fixed)	Input voltage [mVp-p]	Differential output voltage [mVp-p]	Output DC level [V]	Output current [mA]
External Mic to External Earpiece	XMICP and GND	HSEAR R P, HSEAR R N and GND	-2.9	1000	720	1.2	NA
		HSEAR P, HSEAR N and GND					
	XMICN and GND	HSEAR R P, HSEAR R N and GND					
		HSEAR P, HSEAR N and GND					
External Mic to Internal Earpiece	XMICP and GND	EarP and GND	-4.5	1000	600	1.2	NA
		EarN and GND					
	XMICN and GND	EarP and GND					
		EarN and GND					
External Mic to Internal handsfree	XMICP and GND	B2102 pads	-5	1000	560	0	25mA (calc.)
	XMICN and GND	B2102 pads					
Internal Mic to External Earpiece	B2100 (OUT/GND)	HSEAR R P, HSEAR R N and GND	22.7	100	1360	1.2	NA
		HSEAR P, HSEAR N and GND					
		HSEAR R P, HSEAR R N and GND					
		HSEAR P, HSEAR N and GND					

### Measurement data


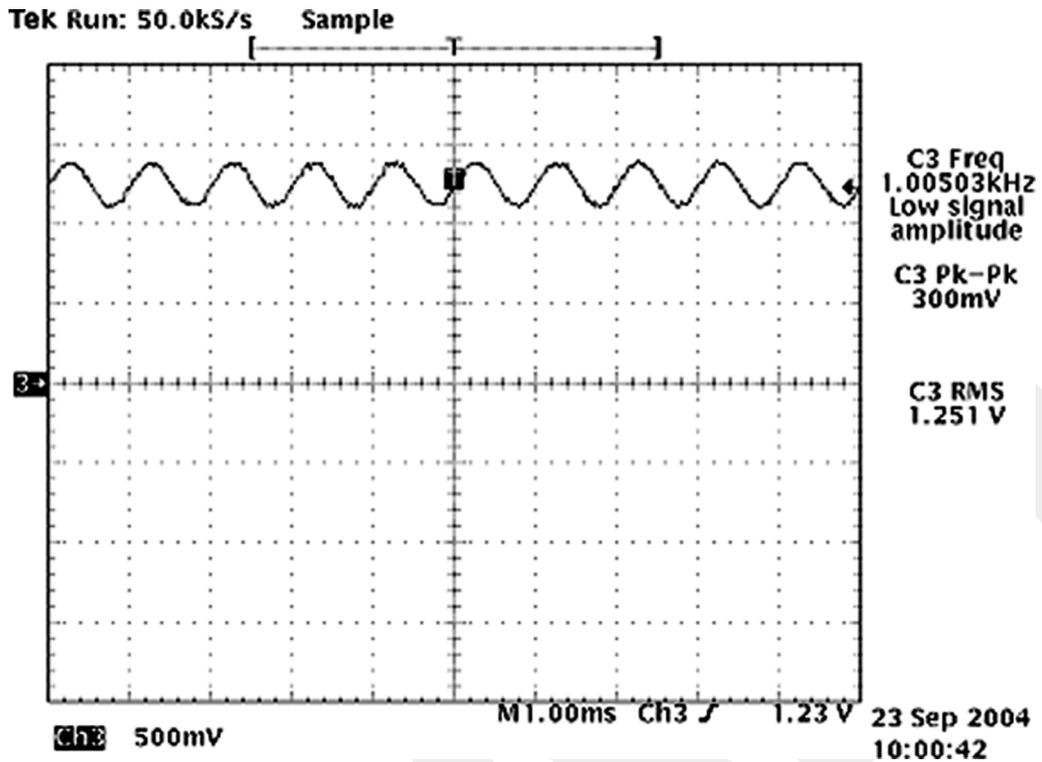


Figure 10 Single-ended output waveform of the Ext\_in\_HP\_out measurement when earpiece is connected.

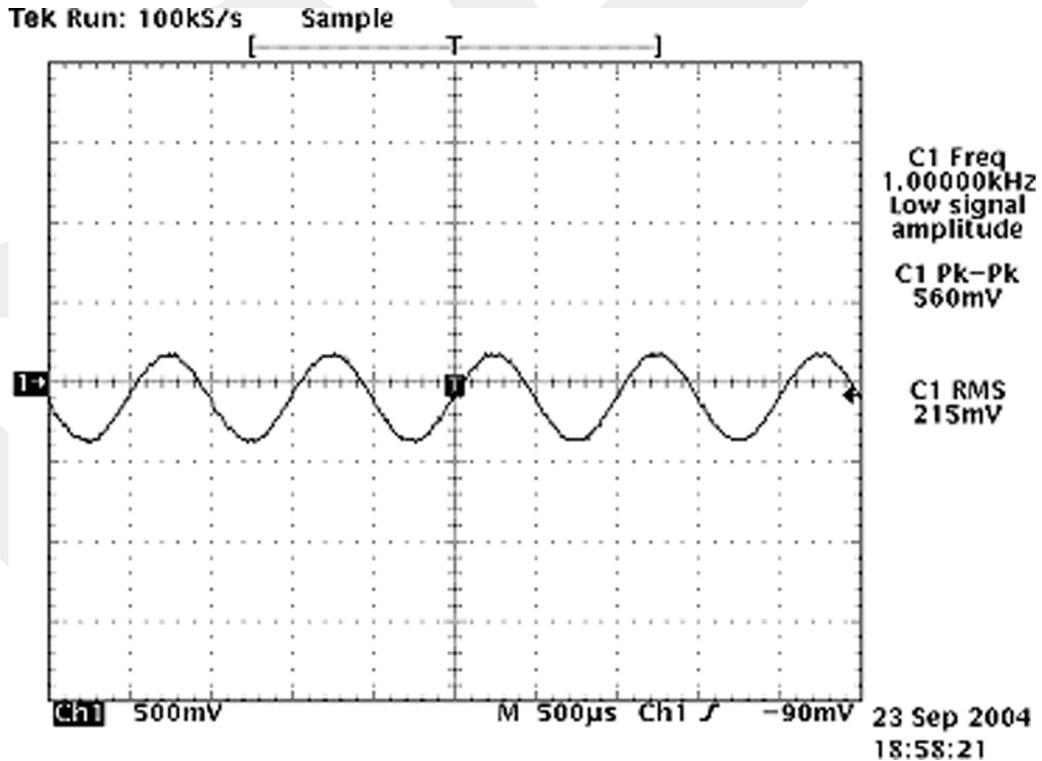

If a special low-pass filter designed for measuring digital amplifiers is unavailable, the measurement must be performed with a current probe and the input signal frequency must be 2kHz.

Figure 11 Differential output waveform of the Ext\_in\_IHF\_out out loop measurement when speaker is connected.


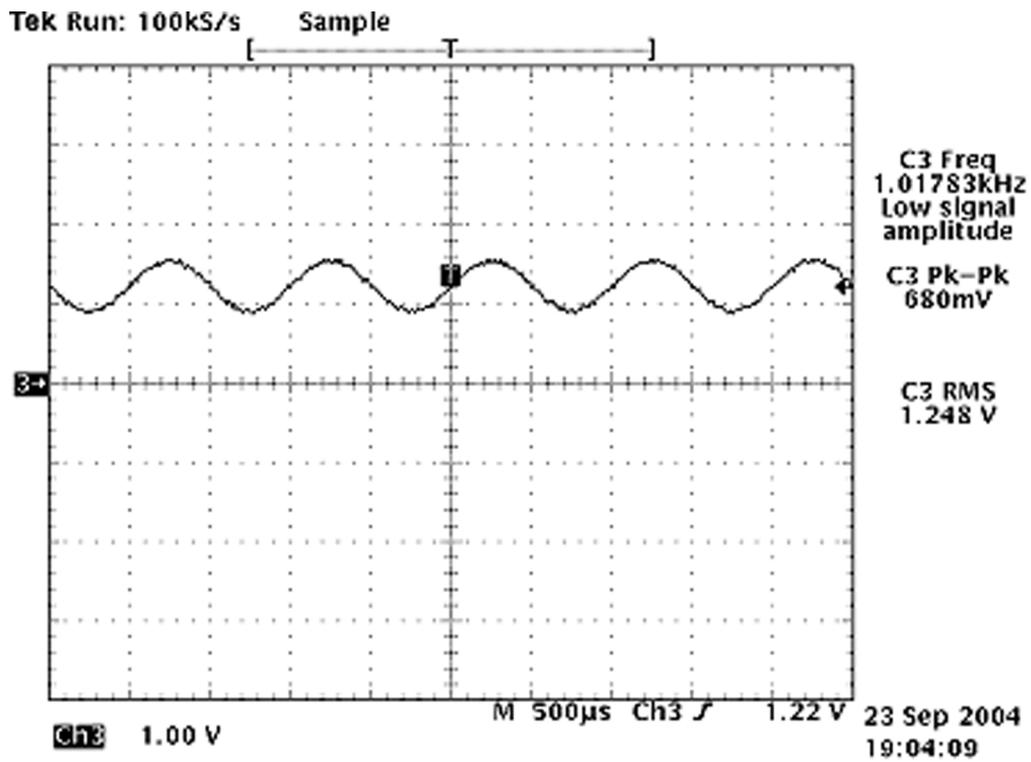


Figure 12 Single-ended output waveform of the HP\_in\_Ext\_out loop when microphone is connected.


## Internal earpiece troubleshooting

### Troubleshooting flow

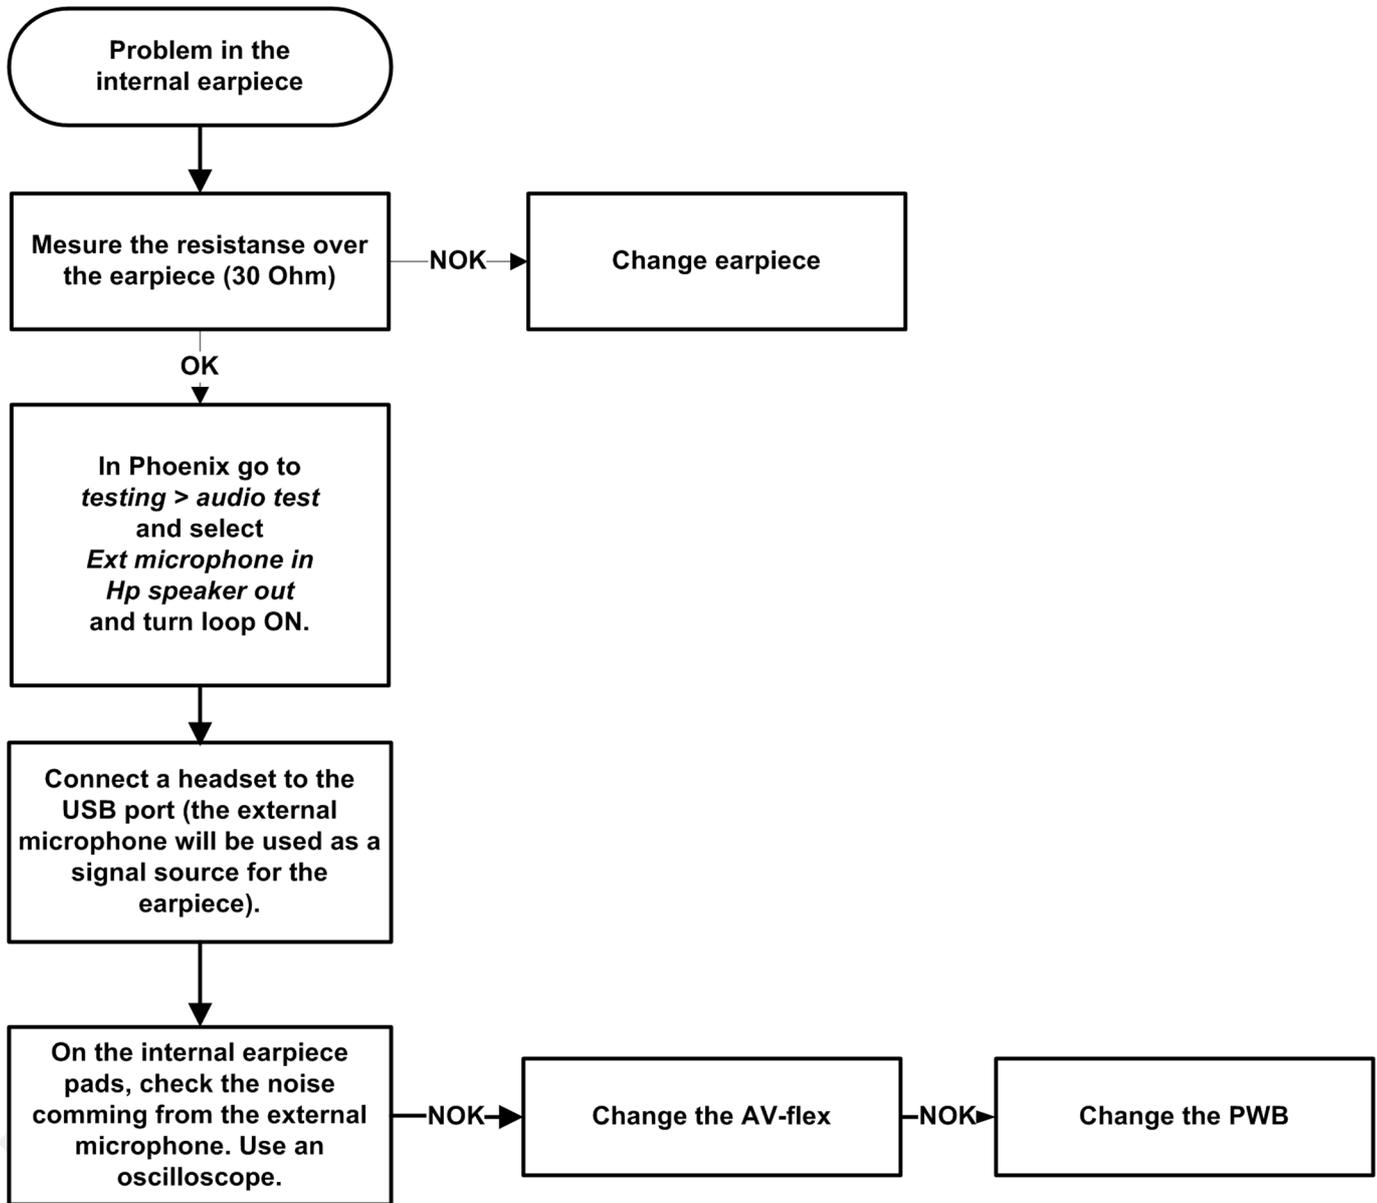


## Internal microphone troubleshooting

### Troubleshooting flow

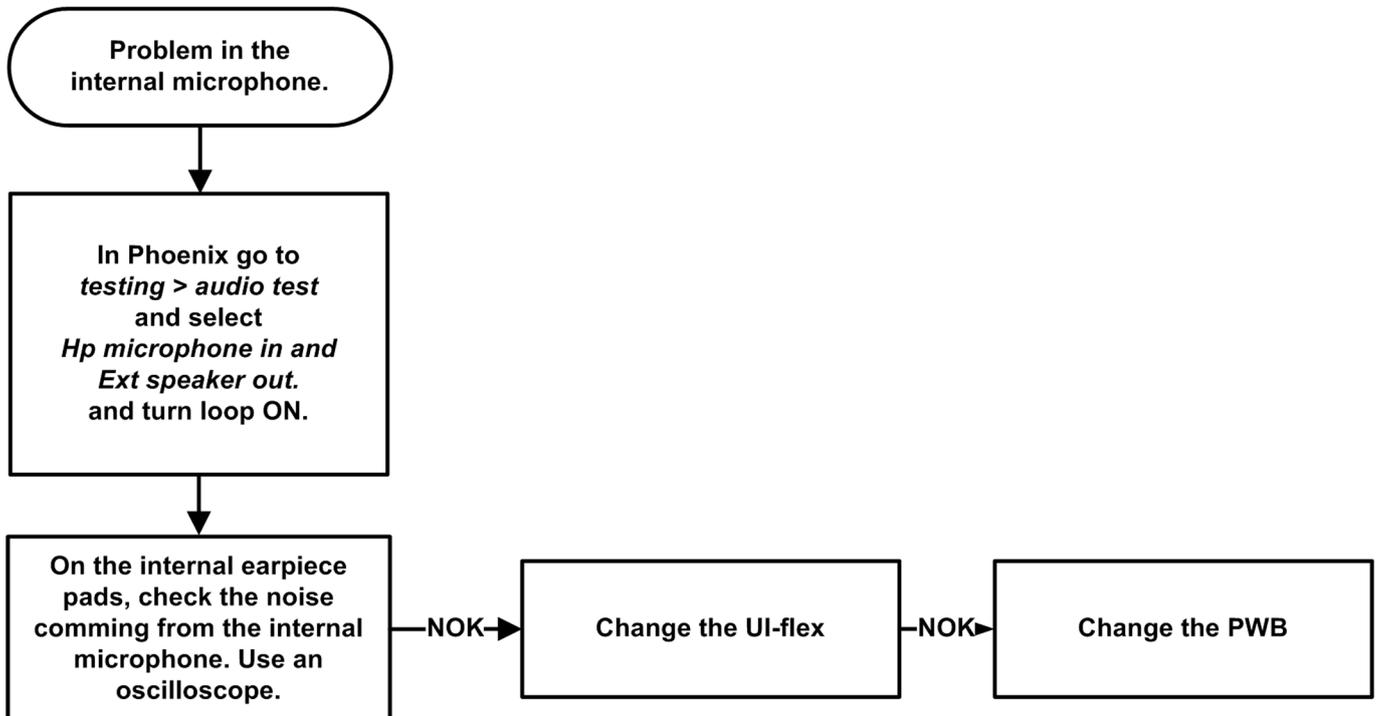


## Internal handsfree (IHF) troubleshooting

### Troubleshooting flow

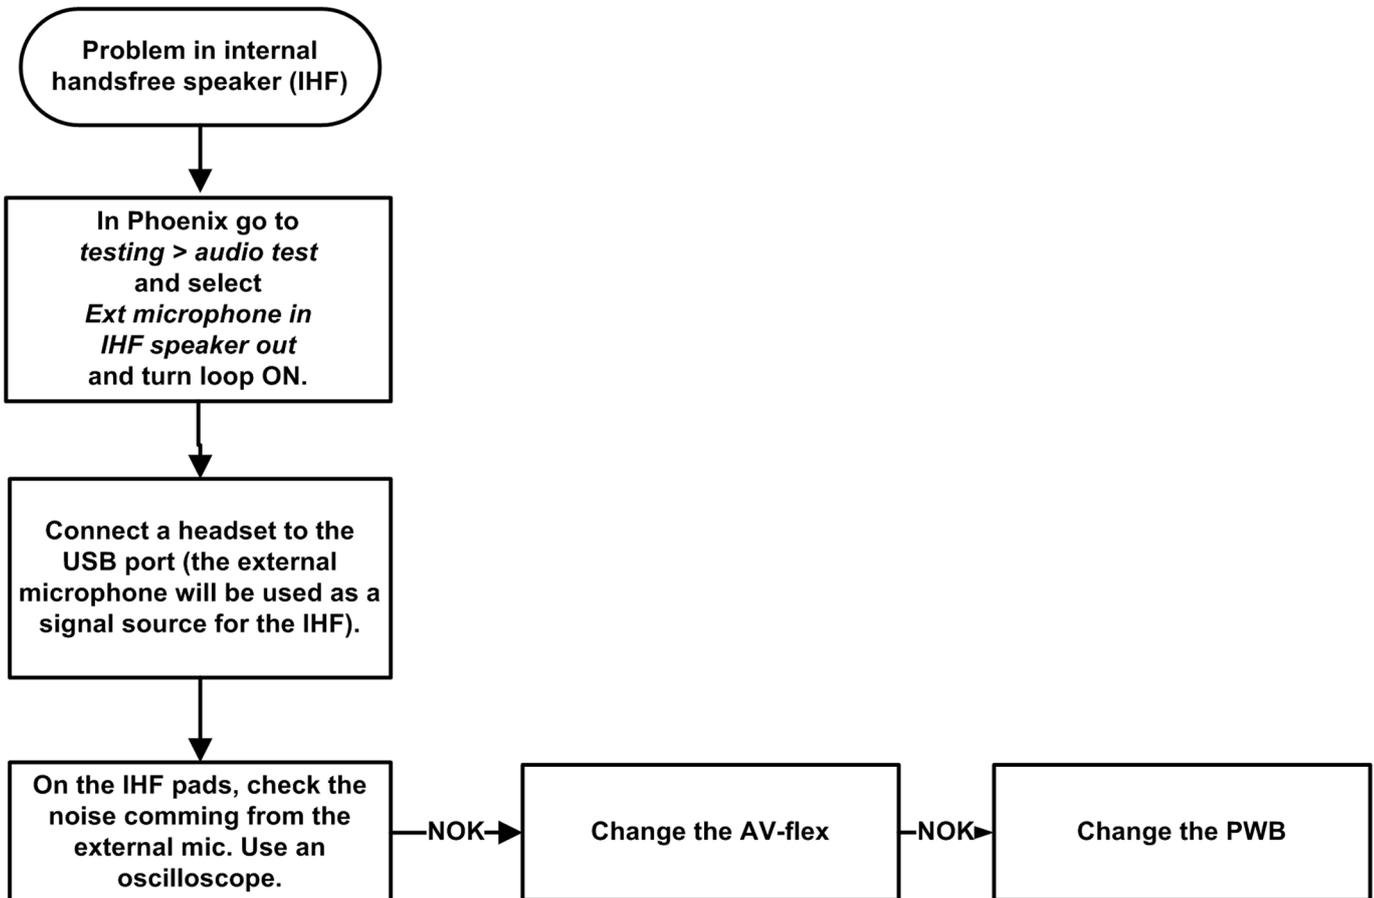


## External earpiece troubleshooting

### Troubleshooting flow

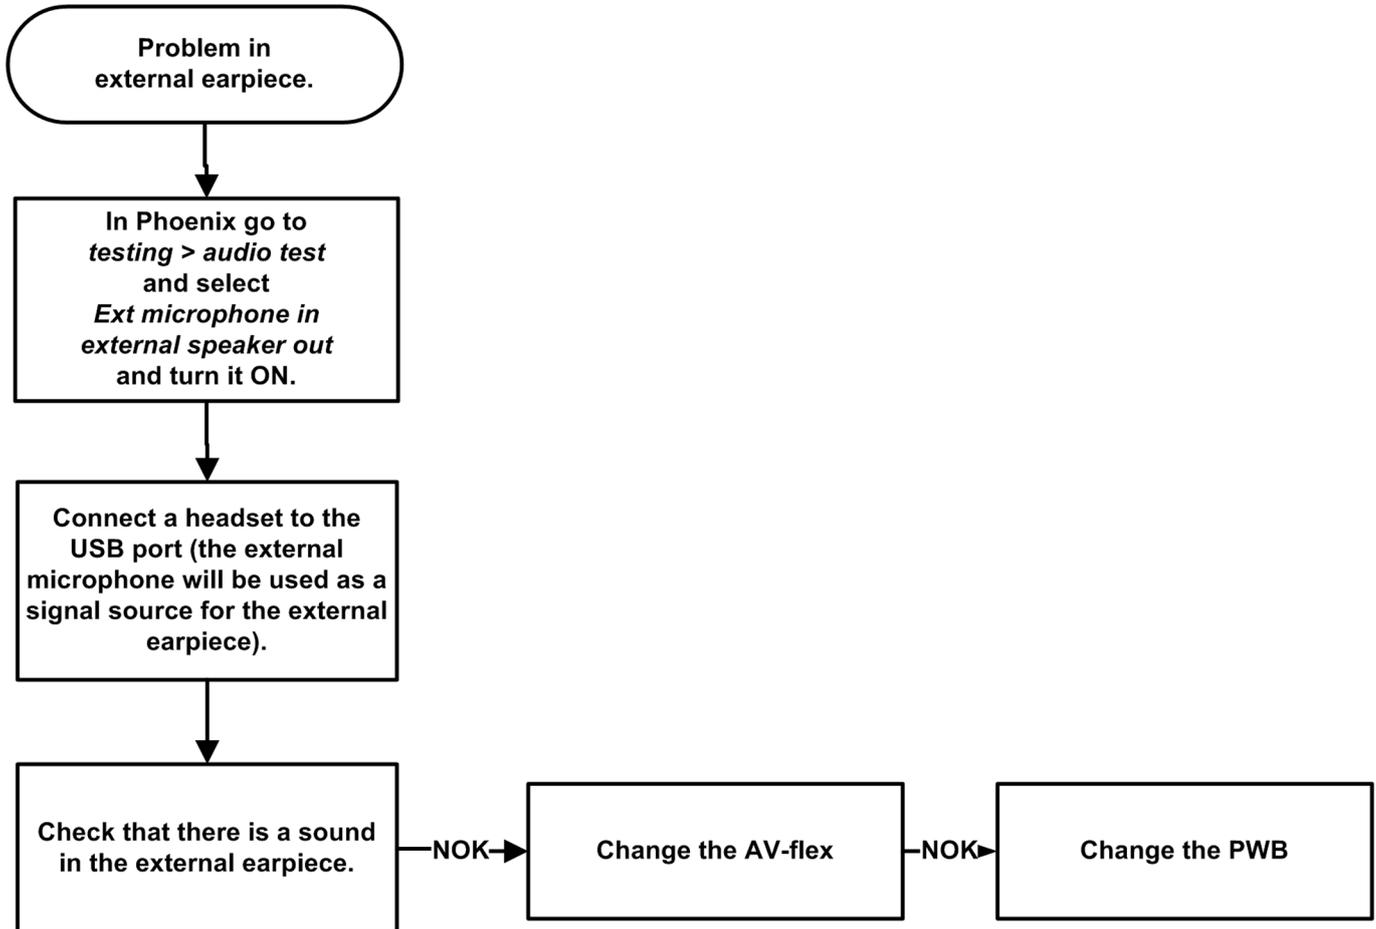


## External microphone troubleshooting

### Troubleshooting flow

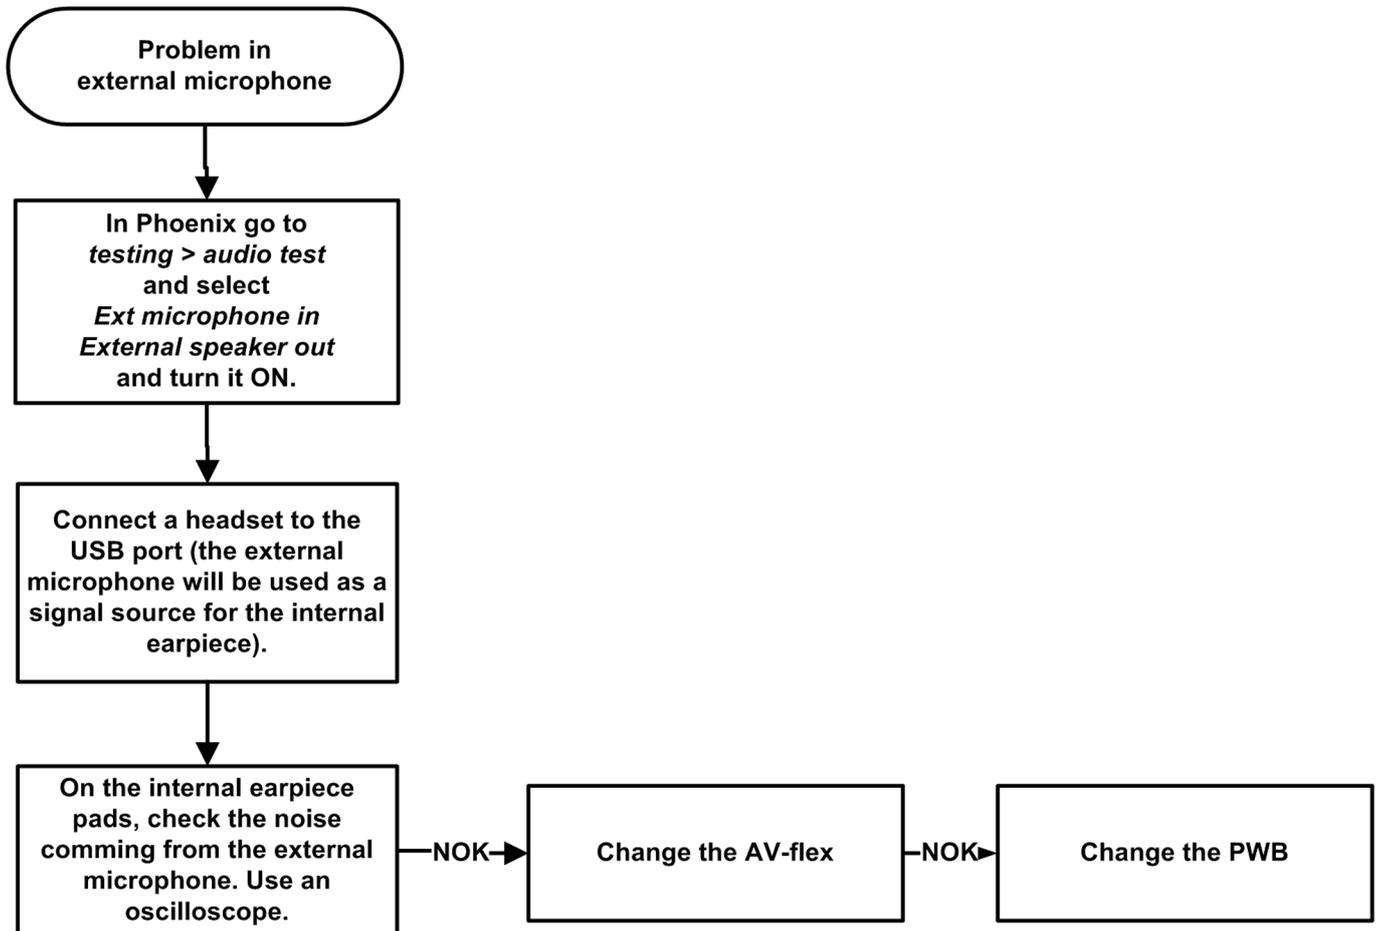

**Vibra troubleshooting**

**Troubleshooting flow**

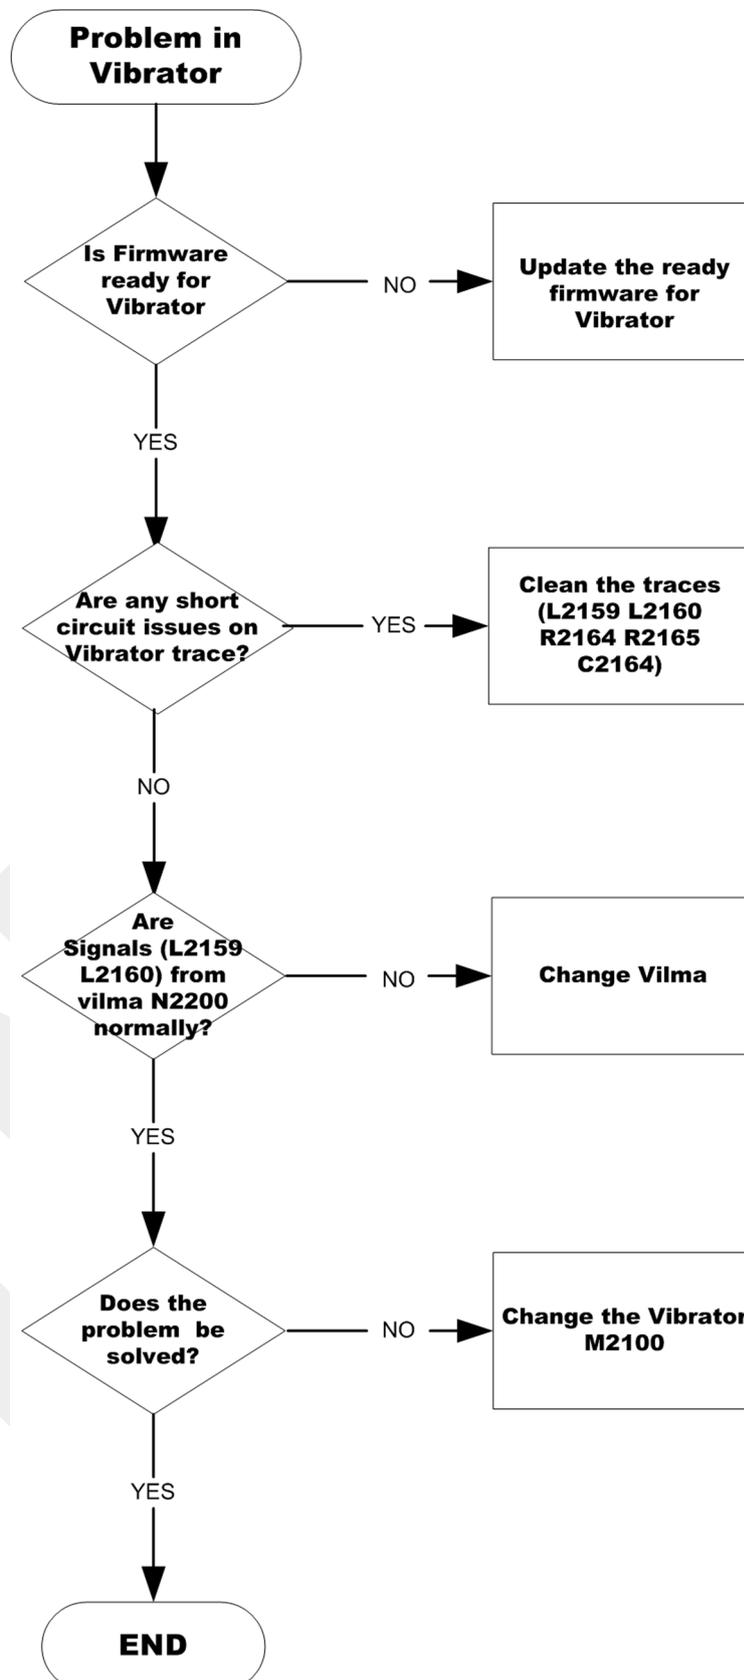

## ■ Baseband manual tuning guide

### Certificate restoring for BB5 products

#### Context

This procedure is performed when the device certificate is corrupted for some reason.

All tunings (RF & Baseband, UI) must be done after performing the certificate restoring procedure.

The procedure for certificate restoring is the following:

- Flash the phone with the latest available software using FPS-8 or FPS-10.
  - Note:** USB flashing does not work for a dead BB5 phone.
- Create a request file.
- Send the file to Nokia by e-mail. Use the following addresses depending on your location:
  - APAC: sydney.service@nokia.com
  - CHINA: repair.ams@nokia.com
  - E&A: salo.repair@nokia.com
  - AMERICAS: fls1.usa@nokia.com
- When you receive a reply from Nokia, carry out certificate restoring.
- Tune the phone completely.
  - Note:** SX-4 smart card is needed.
- If the phone resets after certificate restoring, reflash the phone again.


Required equipment and setup:

- *Phoenix* service software v 2007.19 or newer.
- The latest phone model specific *Phoenix* data package.
- PKD-1 dongle
- SX-4 smart card (Enables BB5 testing and tuning features)
- External smart card reader
  - Note:** The smart card reader is only needed when FPS-8 is used. FPS-10 has an integrated smart card reader.
- Activated FPS-8 flash prommer **OR** FPS-10 flash prommer
- Flash update package 03.18.004 or newer for FPS-8 or FPS-10 flash prommers
- CU-4 control unit
- USB cable from PC USB Port to CU-4 control unit
- Phone model specific adapter for CU-4 control unit
- PCS-1 cable to power CU-4 from external power supply
- XCS-4 modular cable between flash prommer and CU-4
  - Note:** CU-4 must be supplied with +12 V from an external power supply in all steps of certificate restoring.

#### Steps


1. Program the phone software.
  - i Start *Phoenix* and login. Make sure the connection has been managed correctly for FPS-8 or FPS-10.

- ii Update the phone MCU software to the latest available version.  
If the new flash is empty and the phone cannot communicate with *Phoenix*, reflash the phone.
- iii Choose the product manually from **File**→**Open Product** , and click **OK**.  
Wait for the phone type designator (e.g. "RM-1" ) to be displayed in the status bar.
- iv Go to **Flashing**→**SW Update** and wait until *Phoenix* reads the product data as shown in the following picture.

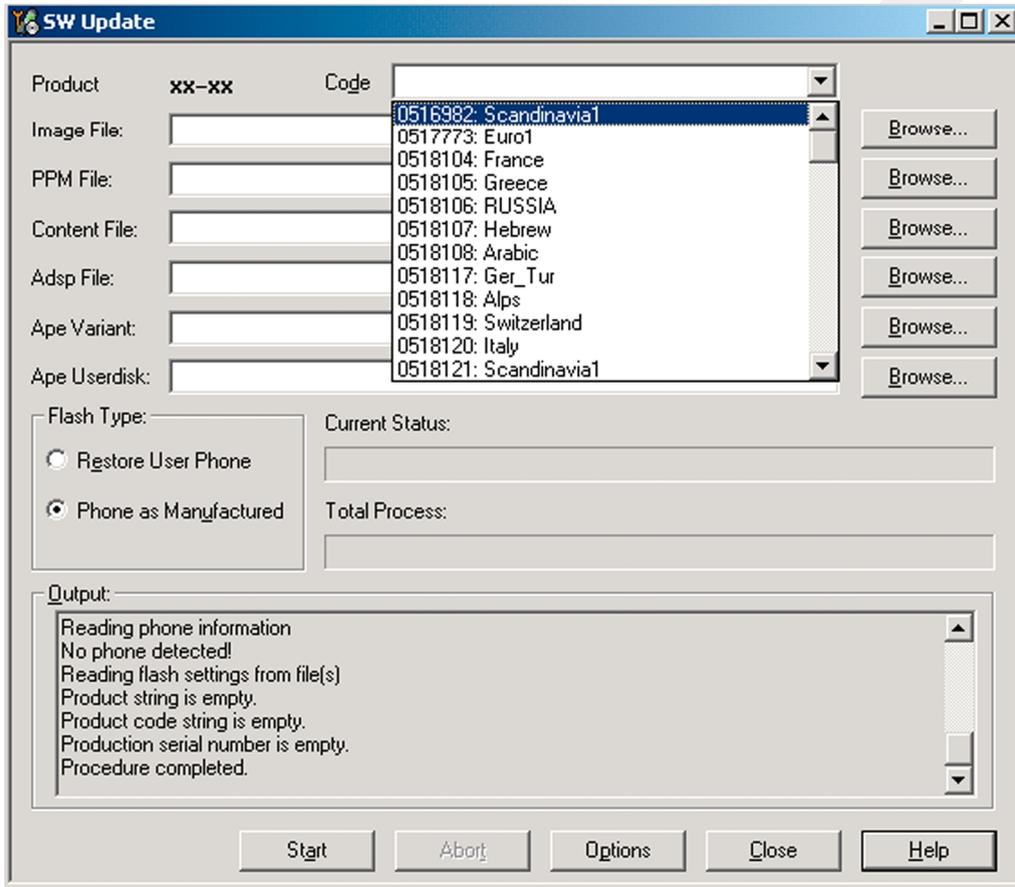

<b>Product</b>	is automatically set according to the phone support module which was opened manually, but the flash files cannot be found because the correct data cannot be read from the phone automatically.
<b>Code</b>	must be chosen manually, it determines the correct flash files to be used. Please choose the correct product code (can be seen in the phone type label) from the dropdown list.
<b>Flash Type</b>	must be set to <b>Phone as Manufactured</b> .

- v To continue, click **Start**.  
Progress bars and messages on the screen show actions during phone programming, please wait.

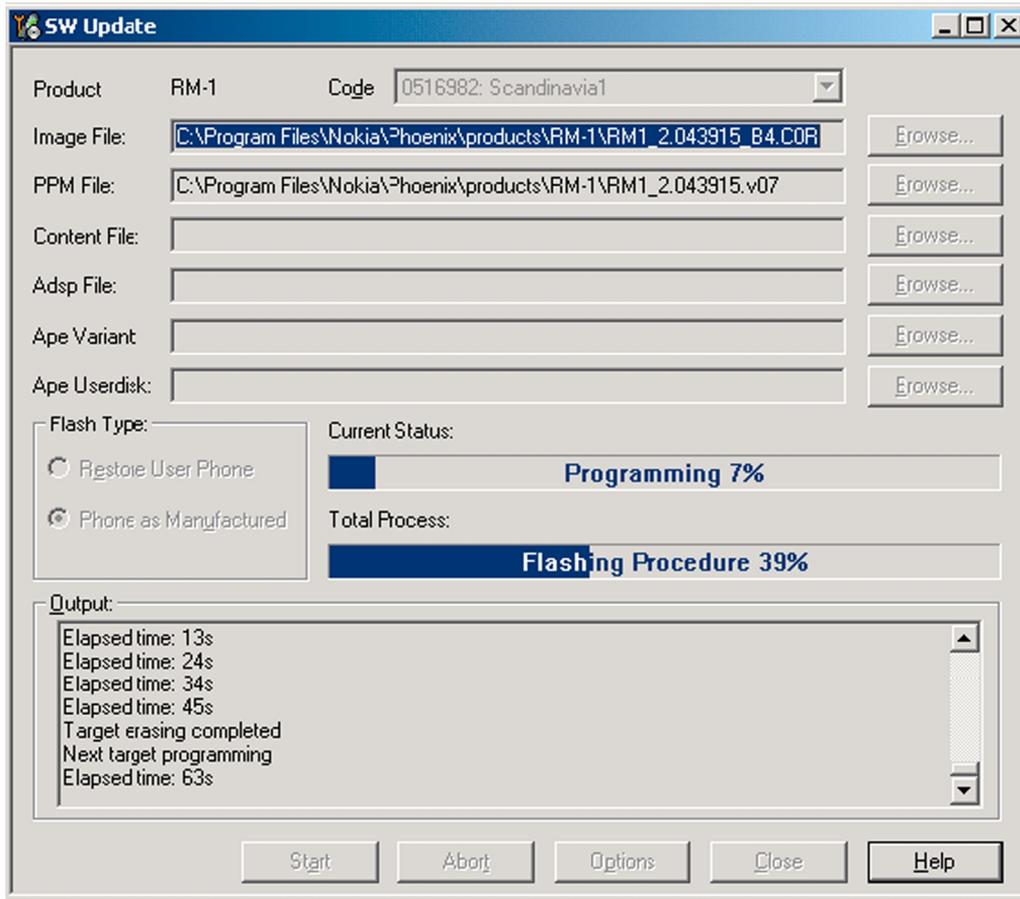

Programming is completed when Flashing Completed message is displayed.

The product type designator and MCU SW version are displayed in the status bar.

vi Close the *SW Update* window and then choose **File**→**Close Product** .


2. Create a *Request* file.

For this procedure, you must supply +12 V to CU-4 from an external power supply.


i To connect the phone with *Phoenix*, choose **File**→**Scan Product** .

ii Choose **Tools**→**Certificate Restore** .


iii To choose a location for the request file, click **Browse**.

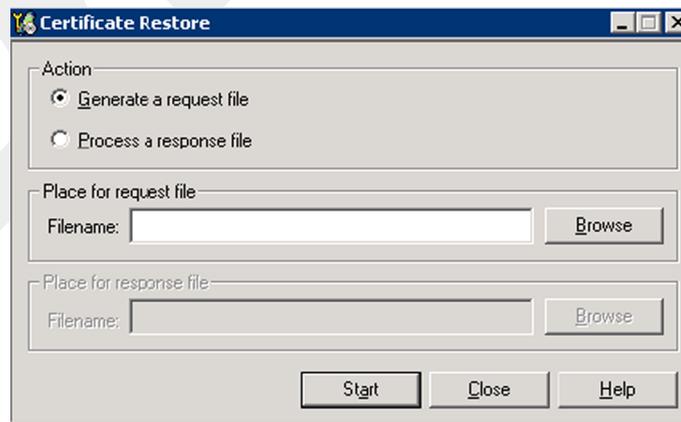

- iv Name the file so that you can easily identify it, and click **Open**.

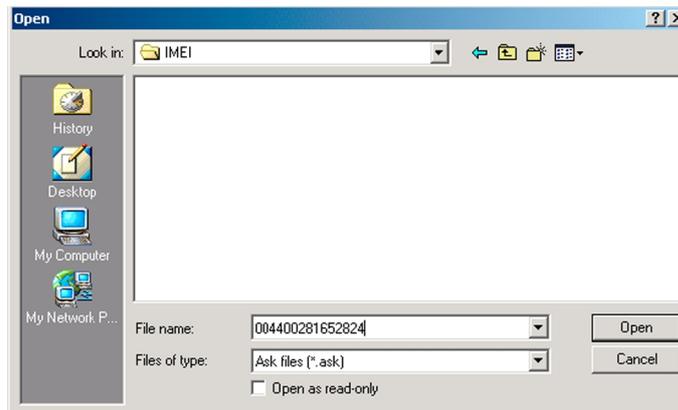


The name of the file and its location are shown.

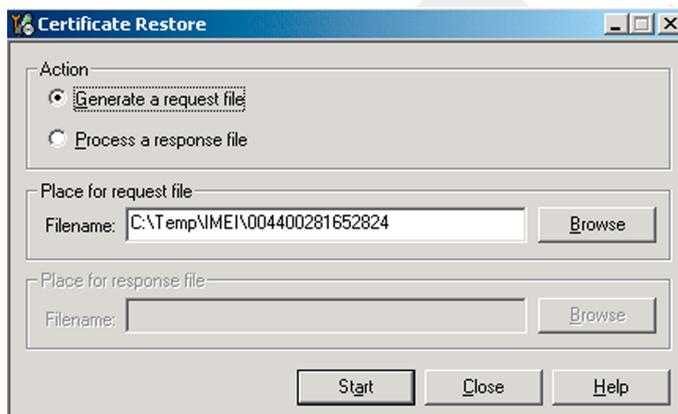


- v To create the *Request* file, click **Start**.
  - vi When the file for certificate restore has been created, send it to Nokia as an e-mail attachment.
3. Restore certificate.
- For this procedure, you must supply +12 V to CU-4 from an external power supply.
- i Save the reply file sent by Nokia to your computer.
  - ii Start *Phoenix* service software.
  - iii Choose **File**→**Scan Product** .

- iv From the **Tools** menu, choose **Certificate Restore** and select **Process a response file** in the *Action* pane.

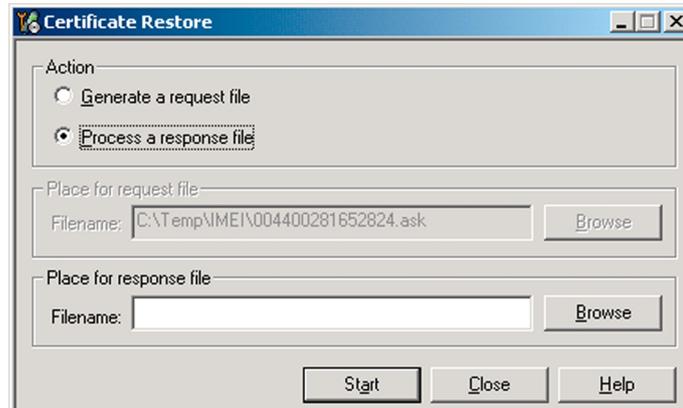


- v To choose the location where response file is saved, click **Browse**.
- vi Click **Open**.

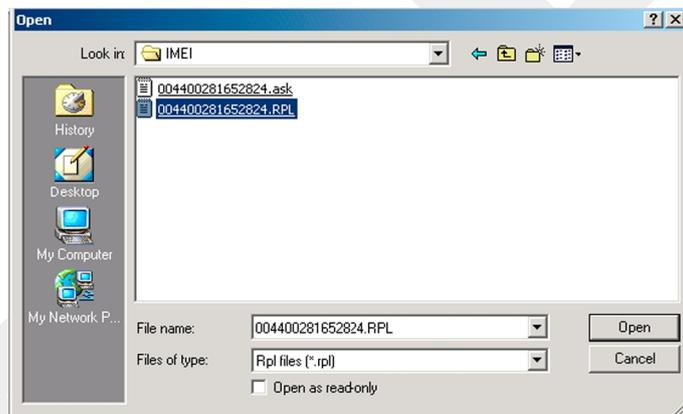

The name of the file and the path where it is located are shown.

- vii To write the file to phone, click **Start**.

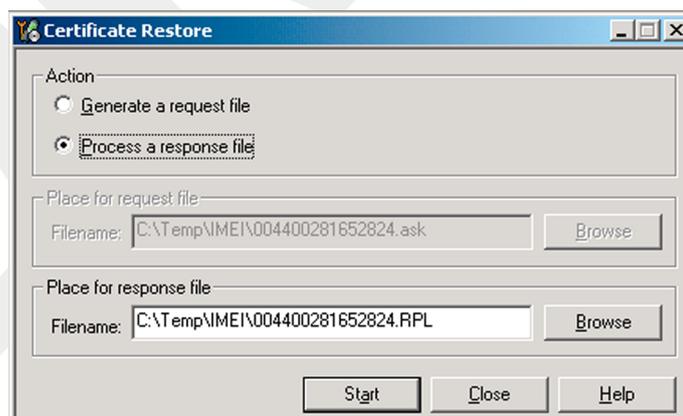

## Next actions

After a successful rewrite, you must retune the phone completely by using *Phoenix* tuning functions.

**Important:** Perform all tunings: RF, BB, and UI.

## Energy management calibration

### Prerequisites

Energy Management (EM) calibration is performed to calibrate the setting (gain and offset) of AD converters in several channels (that is, **battery voltage, BSI, battery current**) to get an accurate AD conversion result.

Hardware setup:

- An external power supply is needed.
- Supply 12V DC from an external power supply to CU-4 to power up the phone.
- The phone must be connected to a CU-4 control unit with a product-specific flash adapter.

### Steps

1. Place the phone to the docking station adapter (CU-4 is connected to the adapter).
2. Start *Phoenix* service software.
3. Choose **File**→ **Scan Product**.
4. Choose **Tuning**→**Energy Management Calibration**.
5. To show the current values in the phone memory, click **Read**, and check that communication between the phone and CU-4 works.
6. Check that the **CU-4 used** check box is checked.
7. Select the item(s) to be calibrated.

**Note:** ADC calibration has to be performed before other item(s). However, if all calibrations are selected at the same time, there is no need to perform the ADC calibration first.

8. Click **Calibrate**.

The calibration of the selected item(s) is carried out automatically.

The candidates for the new calibration values are shown in the *Calculated values* column. If the new calibration values seem to be acceptable (please refer to the following "Calibration value limits" table), click **Write** to store the new calibration values to the phone permanent memory.

**Table 6 Calibration value limits**

Parameter	Min.	Max.
ADC Offset	-20	20
ADC Gain	12000	14000
BSI Gain	1100	1300
VBAT Offset	2400	2650
VBAT Gain	19000	23000
VCHAR Gain	N/A	N/A
IBAT (ICal) Gain	7750	12250

9. Click **Read**, and confirm that the new calibration values are stored in the phone memory correctly. If the values are not stored to the phone memory, click **Write** and/or repeat the procedure again.
10. To end the procedure, close the *Energy Management Calibration* window.

## 4 — RF troubleshooting

(This page left intentionally blank.)

## Table of Contents

General RF troubleshooting .....	4-5
Introduction to RF troubleshooting .....	4-5
RF key components .....	4-6
Auto tuning for RF .....	4-6
General voltage checking .....	4-7
Selftest troubleshooting .....	4-8
RF selftests .....	4-8
Fatal selftests troubleshooting .....	4-10
Receiver troubleshooting .....	4-14
Introduction to receiver (RX) troubleshooting .....	4-14
GSM RX chain activation for manual measurements/GSM RSSI measurement .....	4-15
Transmitter troubleshooting .....	4-16
General instructions for transmitter (TX) troubleshooting .....	4-16
GSM transmitter troubleshooting .....	4-16
Bluetooth and FM radio troubleshooting .....	4-18
Bluetooth troubleshooting .....	4-18
FM radio troubleshooting .....	4-19

## List of Figures

Figure 13 RF key components .....	4-6
Figure 14 Auto tuning concept with CMU200 .....	4-6
Figure 15 General voltage checking test points (main board, both sides) .....	4-8
Figure 16 Testpoints used after fatal self tests .....	4-11
Figure 17 Settings: Time 1ns/d + 0.1Vpp/d .....	4-12
Figure 18 Settings: Time 1ns/d + 0.3Vpp/d .....	4-12
Figure 19 Frequency ~ 100kHz .....	4-14
Figure 20 Typical readings .....	4-17
Figure 21 Troubleshooting diagram: Bluetooth .....	4-18

(This page left intentionally blank.)

## ■ General RF troubleshooting

### Introduction to RF troubleshooting

#### Troubleshooting process

RF troubleshooting is performed in this order:

- 1 Autotuning
- 2 General power checking
- 3 Selftests
- 4 RX and TX troubleshootings

#### Most RF semiconductors are static discharge sensitive

ESD protection must be applied during repair (ground straps and ESD soldering irons).

#### Pre-baking

These parts are moisture sensitive and must be pre-baked prior to soldering:

- RFIC N1001
- Front End Module (FEM) N1002

#### Discrete components

In addition to the two key-components, there are few number of discrete components (capacitors and inductors) for which troubleshooting is done mainly by *visual inspection*.

Capacitors: check for short circuits.

**Note:** In-circuit measurements should be evaluated carefully

#### Measuring equipment

All measurements should be done using:

- An oscilloscope for low frequency and DC measurements. Recommended probe: 10:1, 10Mohm//8pF.
- A radio communication tester including RF generator and spectrum analyser, for example Rohde & Schwarz CMU200. (Alternatively a spectrum analyser and an RF generator can be used. Some tests in this guide are not possible to perform if this solution is chosen).

**Note:** All measurements with an RF coupler should be performed in an RF-shielded environment because nearby base stations can disturb sensitive receiver measurements. If there is no possibility to use RF shielded environment, testing at frequencies of nearby base stations should be avoided.

#### Level of repair

The scope of this guideline is to enable repairs at key-component level. Please refer to the troubleshooting instructions for further information.

## RF key components

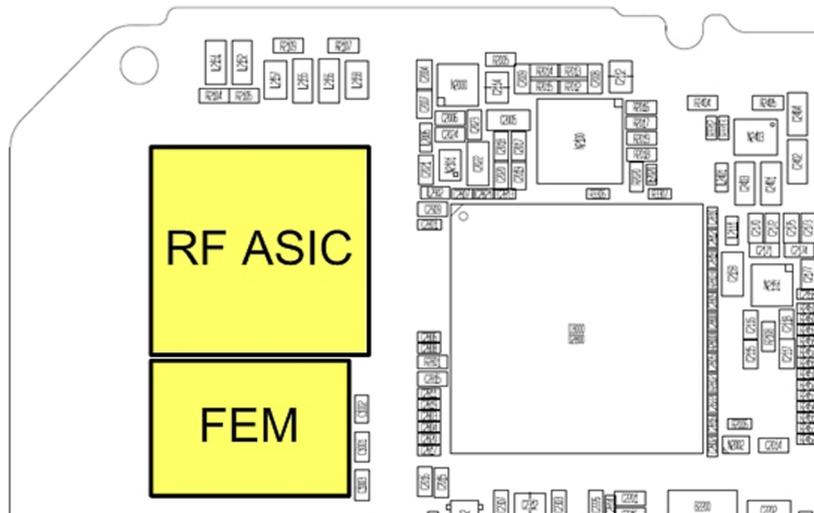


Figure 13 RF key components

### ■ Auto tuning for RF

This phone can be tuned automatically.

Autotune is designed to align the phone's RF part easier and faster. It performs calibrations, tunings and measurements of RX and TX. The results are displayed and logged in a result file, if initiated.

### Hardware set up

Hardware requirements for auto tuning:

- PC (Windows 2000/XP) with GPIB card
- Power supply
- Product specific module jig
- Cables: XRF-1 (RF cable), USB cable, GBIP cable and DAU-9S
- Signal analyser (TX), signal generator (RX) and RF-splitter *or* one device including all.

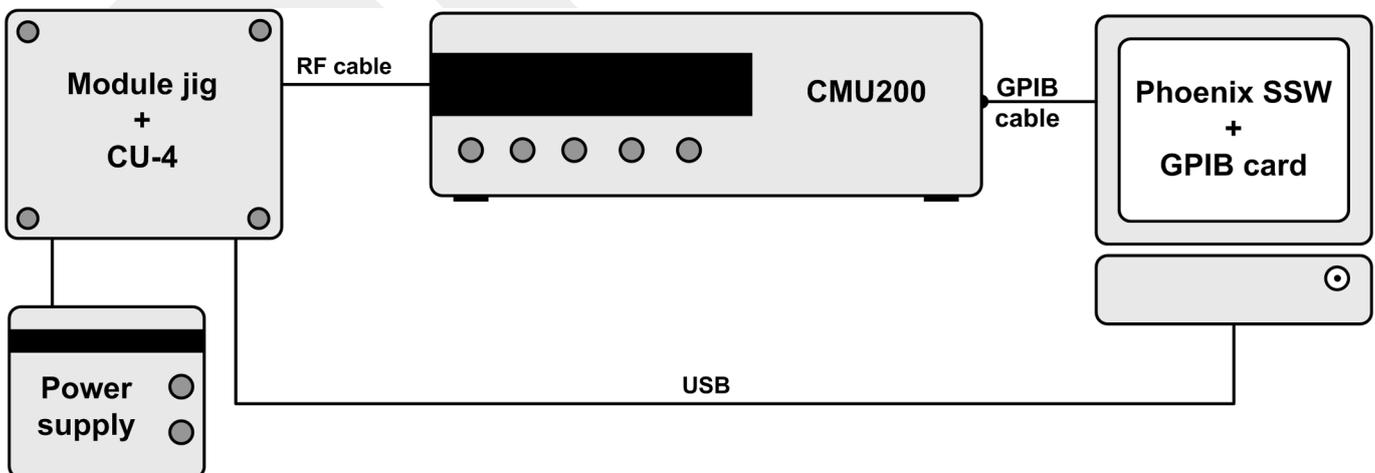


Figure 14 Auto tuning concept with CMU200

## Phoenix preparations

Install the phone specific data package, for example *RM-410\_dp\_1.78\_sw\_sh3.26.exe*. This defines phone specific settings..

## Auto tuning procedure

- 1 Make sure the phone (in the jig) is connected to the equipment. Else, some menus will not be shown in Phoenix.
- 2 To go to autotune, select *Tuning (Alt-U) > Auto-Tune (Alt-A)* from the menu.
- 3 Start autotuning, clicking the *Tune* button.

## ■ General voltage checking

### Steps

1. Set up the main board in the module jig. The phone should be in local mode.
2. Check the following:


#	Signal name	Test point	Voltage (all bands)
1	Vbat at N1002 (FEM)	J2903	3.0-4.7 V
2	Vbat at N1001 (Transceiver)	C2070	3.0-4.7 V
3	VCCX0 supply	C2213	2.4-2.6 V



**Note:** The phone should be in **local mode** when performing Self tests

**Steps**

1. Check the tests shown in the figure below: **Testing**→ **Self Tests** , and press the **Start** button.

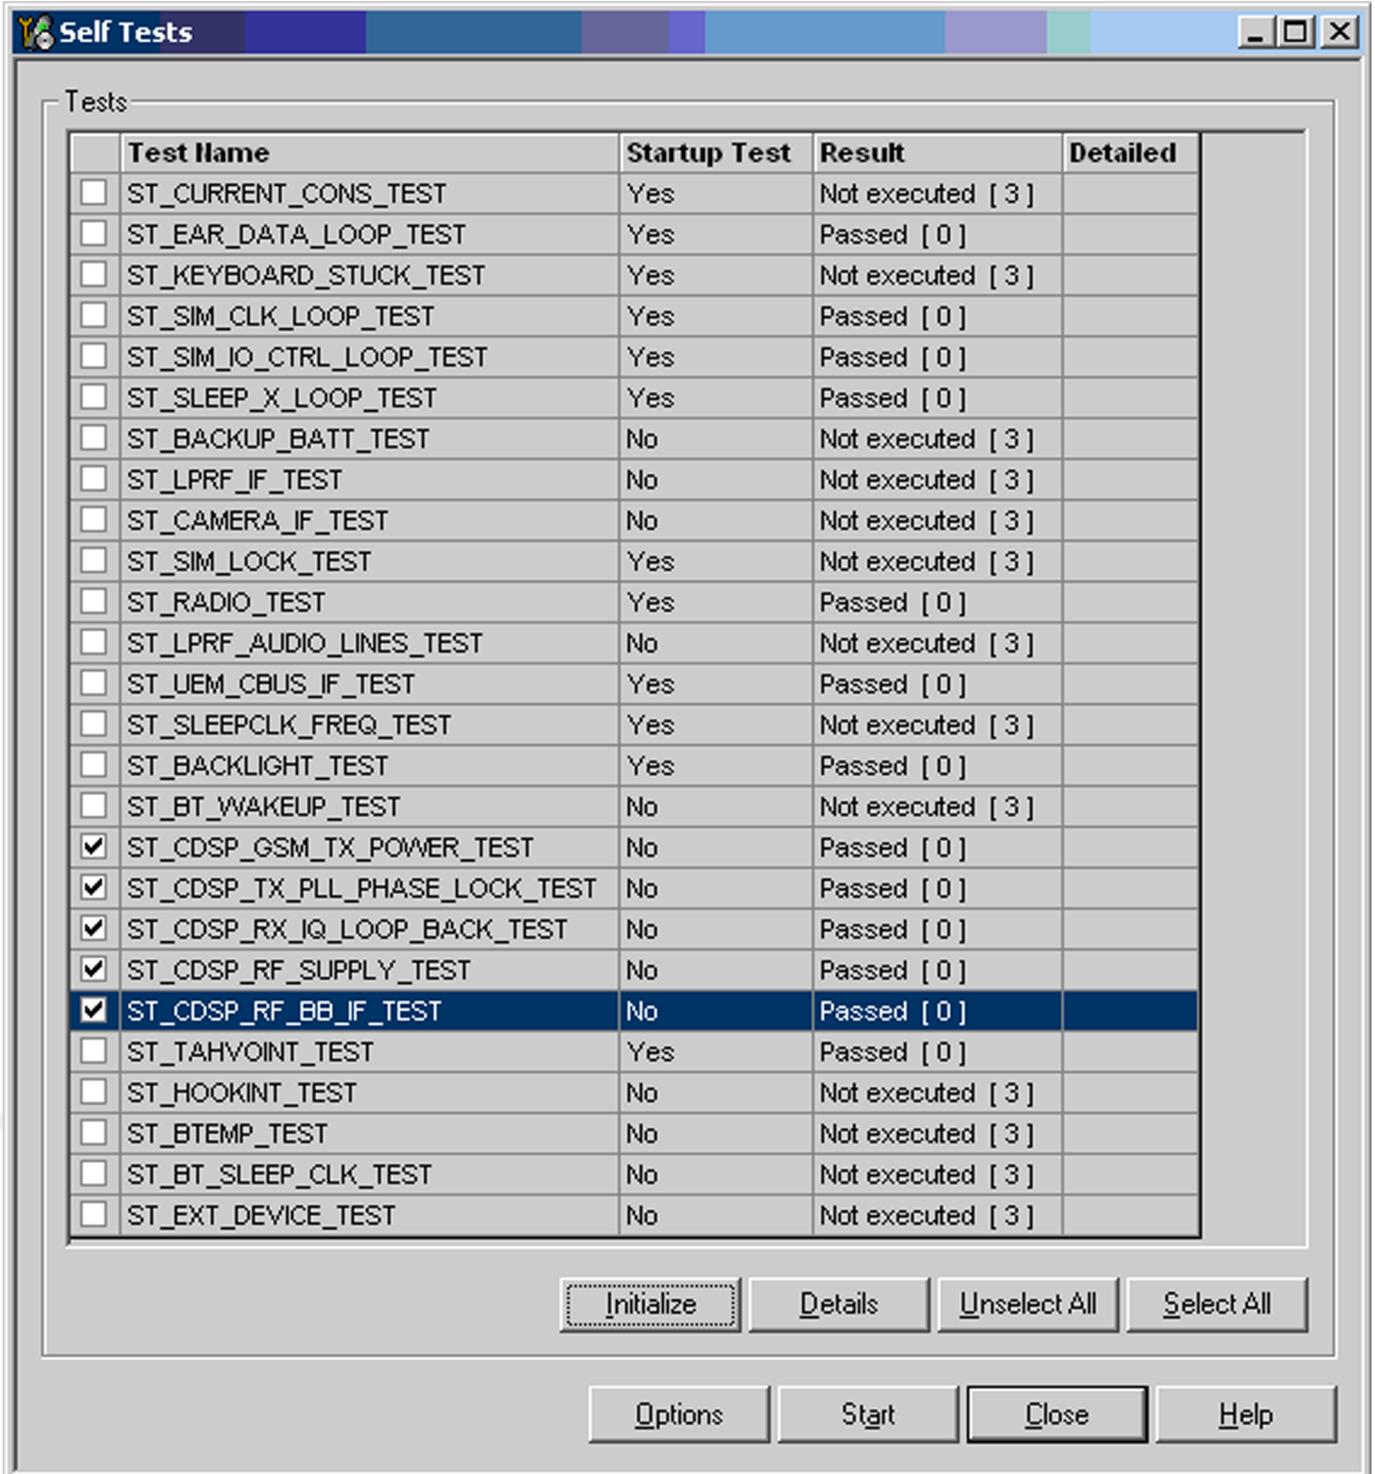

2. A test is either Passed or Fatal. If **Fatal** continue the selftest troubleshooting. If **Passed** continue with the other RF troubleshootings.

3. If Fatal, press **Details** to see error codes

Error codes will now show up in the right most column marked *Detailed*.

<input checked="" type="checkbox"/>	ST_CDSP_RX_IQ_LOOP_BACK_TEST	No	Fatal [ 12 ]	0x00,0x10,0x00,0xDF
<input checked="" type="checkbox"/>	ST_CDSP_RF_SUPPLY_TEST	No	Fatal [ 12 ]	0xA8,0x00,0x00,0x00,0x02,0x60,0x02,0x5F,0xC
<input checked="" type="checkbox"/>	ST_CDSP_RF_BB_IF_TEST	No	Fatal [ 12 ]	0x00,0xC0,0x00,0x00
<input type="checkbox"/>	ST_TAHOINT_TEST	Yes	Passed [ 0 ]	
<input type="checkbox"/>	ST_SECURITY_TEST	No	Not executed [ 3 ]	

**Note:** The Error Code contains the two first words: *0x00* and *0xC0*.

### Fatal selftests troubleshooting

If a self test is fatal, check the **Details**→**Error code** and follow the instructions below.

**Note:** If **ST\_CDSP\_RF\_BB\_IF\_TEST** is fatal, the other self tests will also be fatal. Always start troubleshooting **ST\_CDSP\_RF\_BB\_IF\_TEST**.

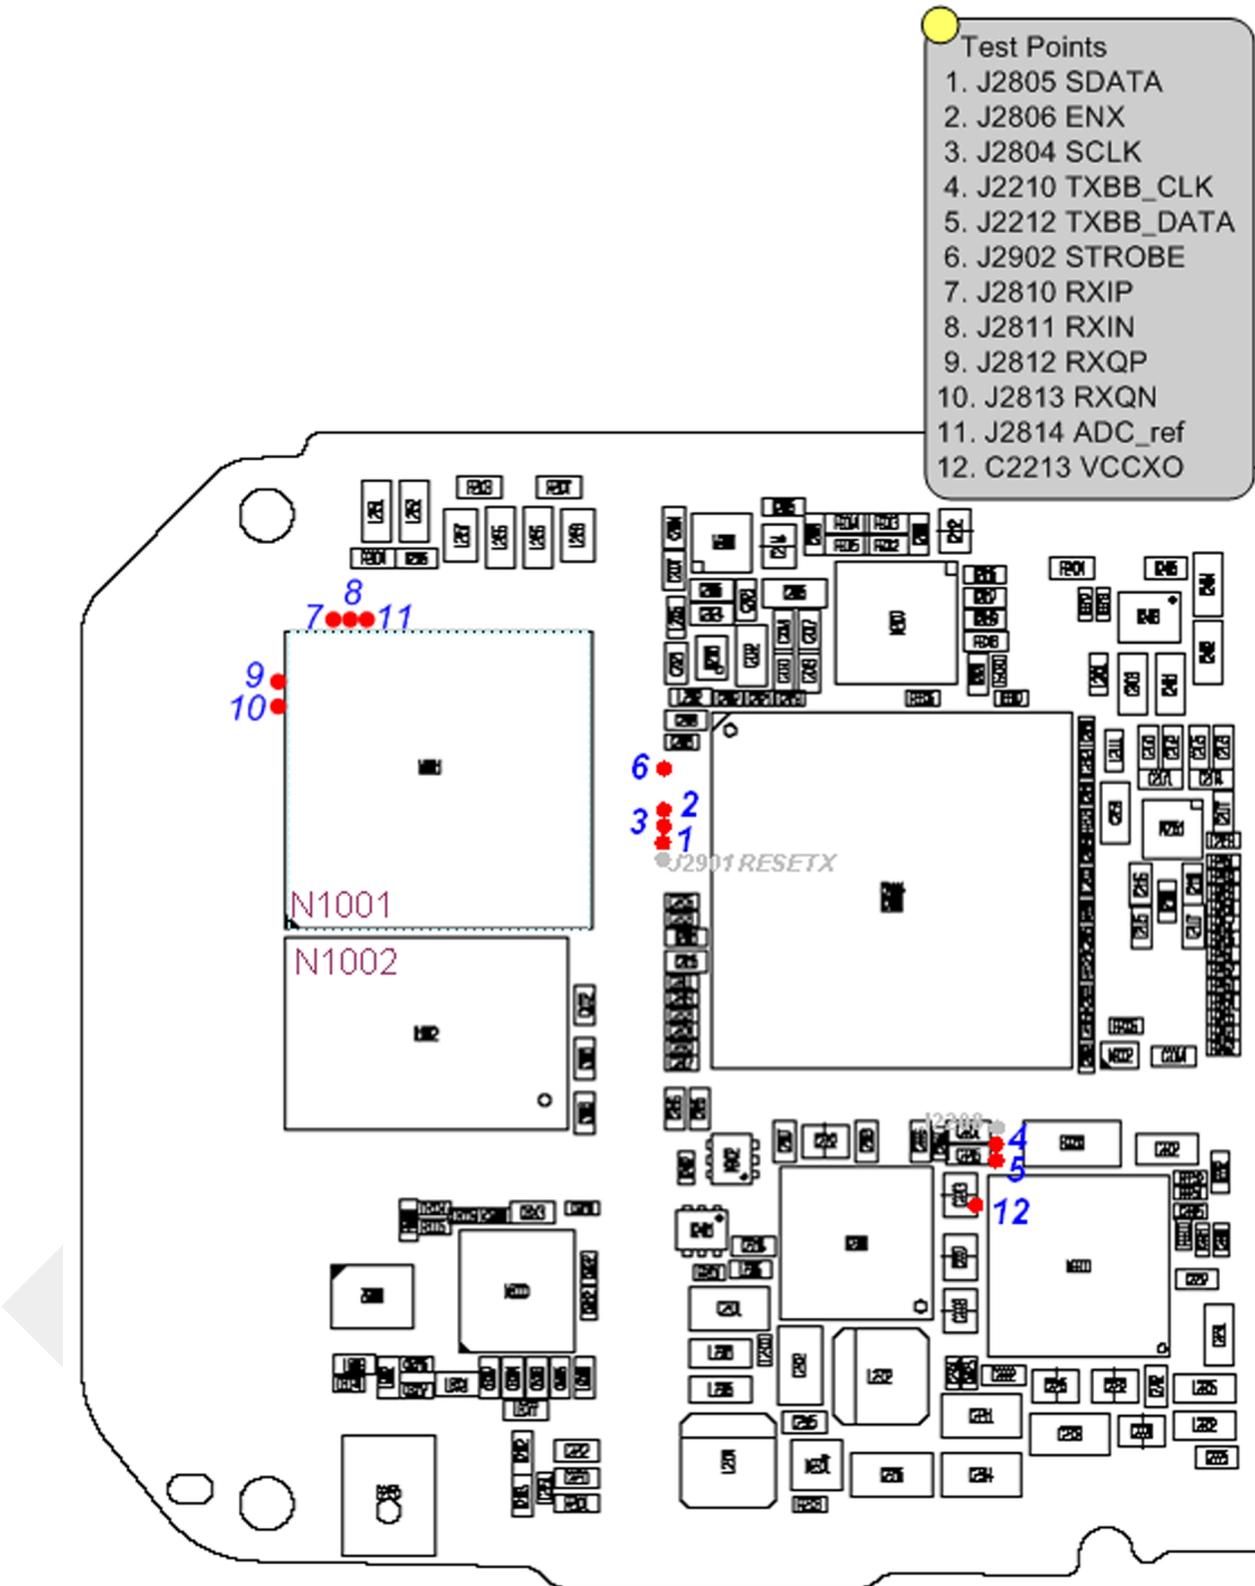
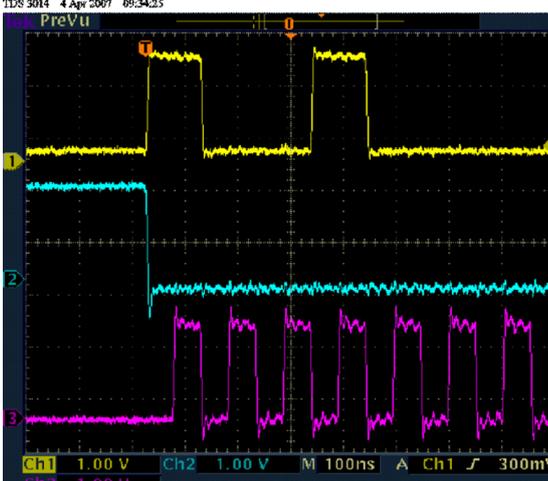
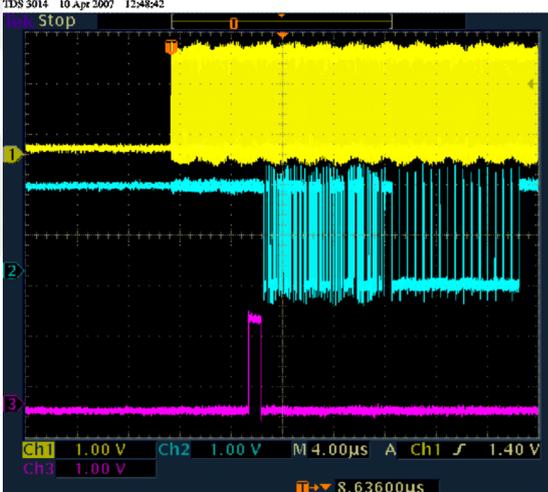


Figure 16 Testpoints used after fatal self tests

### ST\_CDSP\_RF\_BB\_IF\_TEST is fatal

This test is checking the communication between baseband and RF. It will show in what part the problem is located.

Error code	Test	Action
<p>ST_RFBUS_WRITE_READ_FAIL (0x00, 0x40) or combination (0x00, 0xC0)</p>	<p>In Phoenix <b>Testing</b> → <b>GSM</b> → <b>RF Controls</b> → <b>RX</b></p> <p>Probe:</p> <ol style="list-style-type: none"> <li>1 J2805 SDATA (Ch1) [1]</li> <li>2 J2806 ENX (Ch2) [2]</li> <li>3 J2804 SCLK (Ch3) [3]</li> </ol> <p>The <b>result</b> should look like this:</p>  <p>Figure 17 Settings: Time 1ns/d + 0.1Vpp/d</p>	<p><b>All OK:</b> replace N1001</p> <p><b>NOK :</b> go to BB troubleshooting</p>
<p>ST_TXFIFO_WRITE_READ_FAIL (0x00, 0x80)</p>	<p>In Phoenix: <b>Testing</b> → <b>GSM</b> → <b>RF Controls</b> → <b>TX</b></p> <p>Probe:</p> <ol style="list-style-type: none"> <li>1 J2210 TXBB_CLK (Ch1) [4]</li> <li>2 J2212 TXBB_DATA (Ch2) [5]</li> <li>3 J2902 STROBE (Ch3) [6]</li> </ol> <p>The <b>result</b> should look like this:</p>  <p>Figure 18 Settings: Time 1ns/d + 0.3Vpp/d</p>	<p><b>All OK:</b> replace N1001</p> <p><b>NOK :</b> go to BB troubleshooting</p>

### ST\_CDSP\_GSM\_TX\_POWER\_TEST is fatal

This test is checking power amplifier functionality.

Error code	Test	Action
ST_GSM1800_TX_PWR_LOW (0x00, 0x02) ST_GSM850_TX_PWR_LOW (0x00, 0x08) Or combination (0x00, 0x0A)	-	Replace N1002
ST_TXDAC_FAIL (0x00, 0x10) Or combination (0x00, 0x1A), (0x00, 0x12), (0x00, 0x18)	-	Replace N1001

### ST\_CDSP\_TX\_PLL\_PHASE\_LOCK\_TEST is fatal


This test is checking if phase lock loop is working.

Error code	Test	Action
ST_TX_PLL_FAIL (0x00, 0x08)		Replace N1001

### ST\_CDSP\_RX\_IQ\_LOOP\_BACK\_TEST is fatal

This test is checking the analogue RX communication between baseband and RF.

Error code	Test	Action
ST_FIMRCAL_FAIL (0x00, 0x40) or combination (0x00, 0x50) and (0x00, 0x60)		Replace N1001

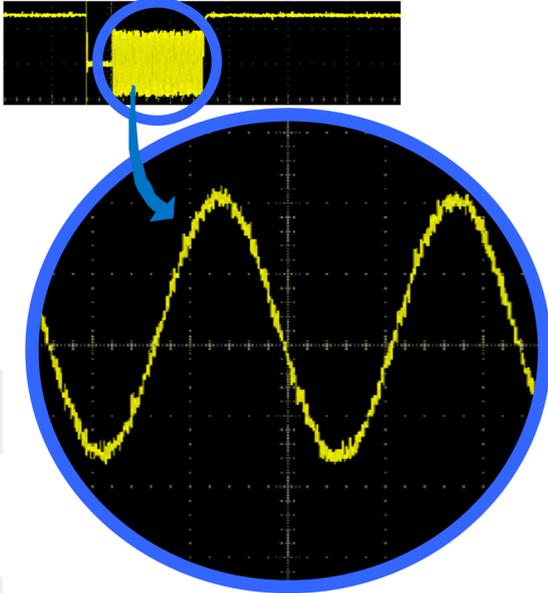Error code	Test	Action
<p>ST_IQ_POWER_TOO_SMALL (0x00, 0x10) ST_IQ_POWER_TOO_HIGH (0x00, 0x20)</p>	<p>In Phoenix: <b>Testing</b> → <b>GSM</b> → <b>RF Controls</b> → <b>RX</b> Apply -80dBm signal at 948.06771 MHz Probe during RX operation: 1 J2810 RXIP [7] 2 J2811 RXIN [8] 3 J2812 RXQP (Ch1) [9] 4 J2813 RXQN [10] 5 J2814 ADC_ref [11] Check voltage level between 0.7-0.8V The <b>result</b> should look like this:</p>  <p>Figure 19 Frequency ~ 100kHz</p>	<p><b>All OK</b> : go to BB troubleshooting <b>NOK</b>: replace N1001</p>

### ST\_CDSP\_RF\_SUPPLY\_TEST is fatal

This test is checking internal voltage regulators.

Error code	Test	Action
<p>ST_VREG_LD02 (0x20, 0x00) ST_VREG_VCCXO (0x80, 0x00) Or combination (0xA0, 0x00)</p>	<p>Check 1 VCCXO value at testpoint E2909 = 2.4 – 2.6 V [12] 2 VBat = 3.0 – 4.7 V</p>	<p><b>All OK</b>: replace N1001 <b>NOK</b> : go to power troubleshooting</p>

## Receiver troubleshooting

### Introduction to receiver (RX) troubleshooting

RX can be tested by making a phone call or in local mode. For the local mode testing, use Phoenix service software.

The main RX troubleshooting measurement is RSSI reading. This test measures the signal strength of the received signal. For GSM RSSI measurements, see *GSM RX chain activation for manual measurements/GSM RSSI measurement*.

## GSM RX chain activation for manual measurements/GSM RSSI measurement


### Prerequisites

Make the following settings in Phoenix service software and in the signal generator:

Setting	GSM850	GSM900	GSM1800	GSM1900
Phoenix Channel	190	37	700	661
Signal generator to antenna connector	881.66771 MHz (67.71kHz offset) at -60dBm	942.46771 MHz (67.71kHz offset) at -60dBm	1842.86771 MHz (67.71kHz offset) at -60dBm	1960.06771 MHz (67.71kHz offset) at -60dBm

### Steps

1. Set the phone to local mode.
2. Activate RSSI reading in Phoenix (**Testing**→**GSM**→**RSSI reading** )

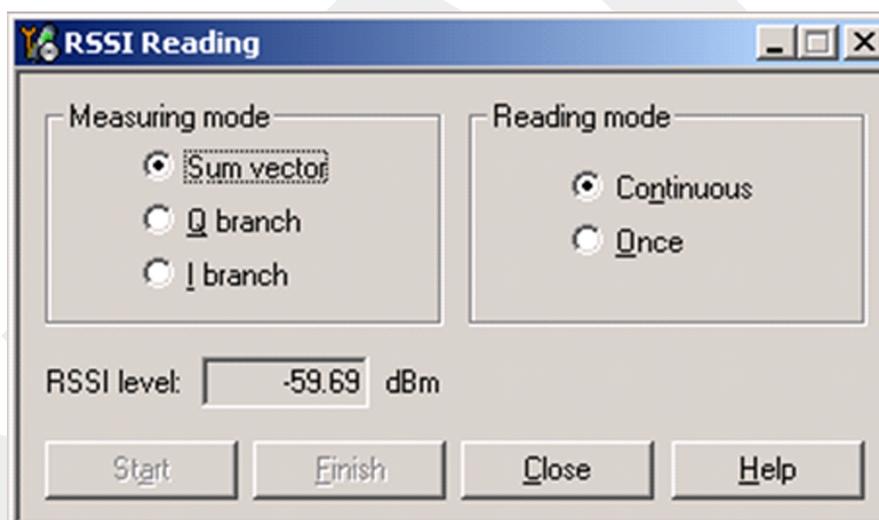

### Results

With the *Measuring mode* set to *Sum vector*, the reading should reflect the level of the signal generator (- losses) +/- 5 dB.

When varying the level in the range -30 to -102 dBm the reading should then follow within +/-5 dB.

Now select the measuring mode to *Q branch* and *I Branch*. In each case the reading should be 3 dB below the signal generator level.

### Next actions

RSSI-reading AND TX troubleshooting is failing: replace N1002.

TX is OK and RX is failing: replace N1001.

## ■ Transmitter troubleshooting

### General instructions for transmitter (TX) troubleshooting

Please note the following before performing transmitter tests:

- TX troubleshooting requires TX operation.
- Do not transmit on frequencies that are in use!
- The transmitter can be controlled in local mode for diagnostic purposes.
- The most useful Phoenix tool for GSM transmitter testing is "RF Controls".
- Remember that re-tuning is not a fix! Phones are tuned correctly in production


**Note:** Never activate the GSM transmitter without a proper antenna load. Always connect a 50  $\Omega$  load to the RF connector (antenna, RF-measurement equipment or at least a 2 W dummy load); otherwise the power amplifier may be damaged.

### GSM transmitter troubleshooting

#### Steps


1. Set the phone to local mode.
2. Activate RF controls in Phoenix (**Testing**→**GSM**→**Rf Controls** ).

Make settings as shown in the picture:

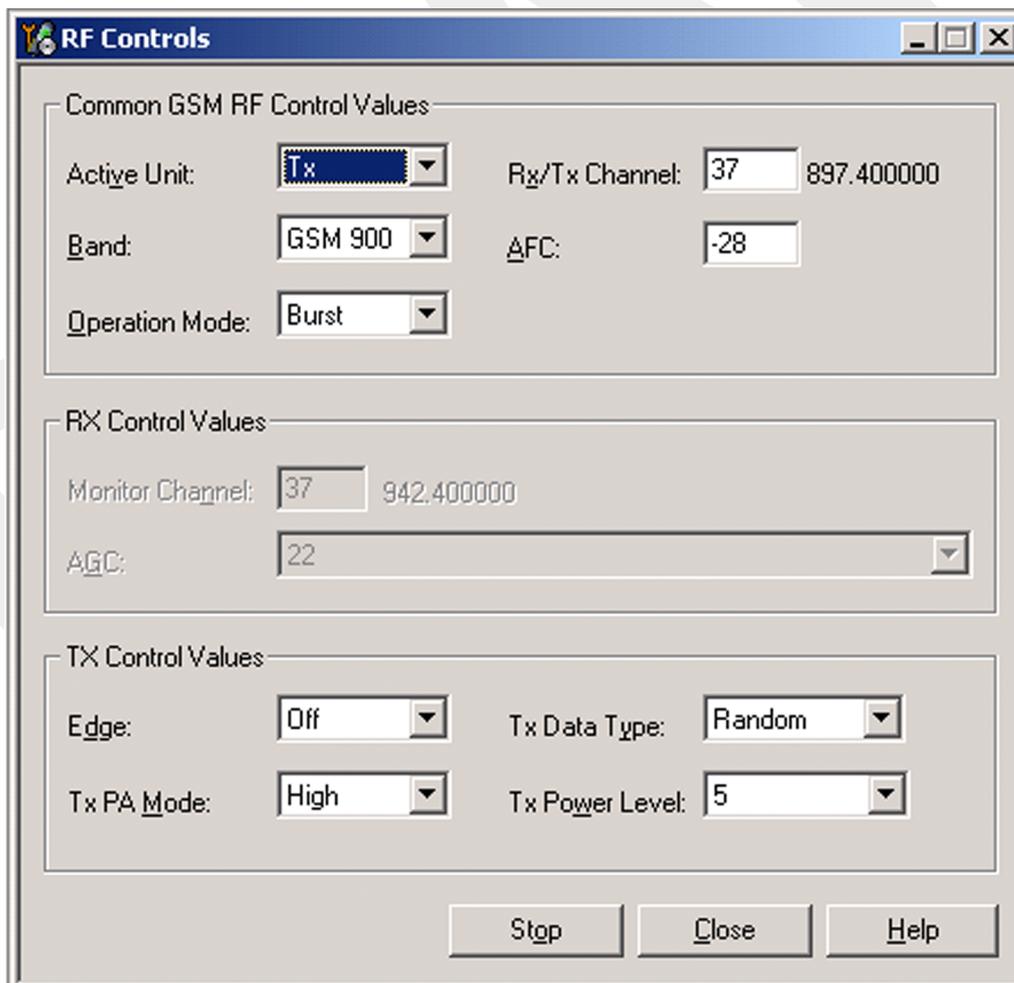


- Check the basic TX parameters (i.e. power, phase error, modulation and switching spectrum), using a communication analyser (for example CMU200).


Analyser settings

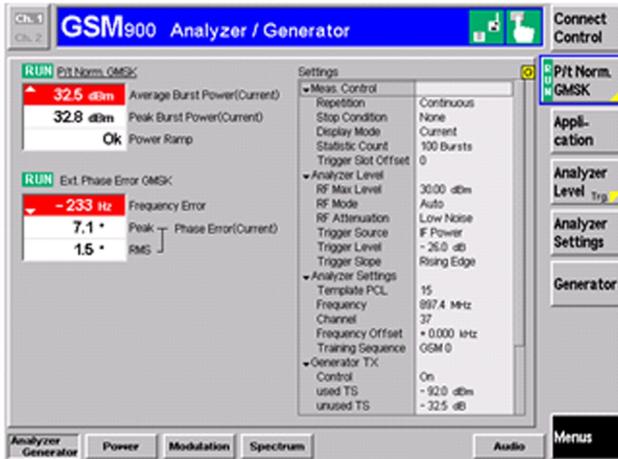


Phase error

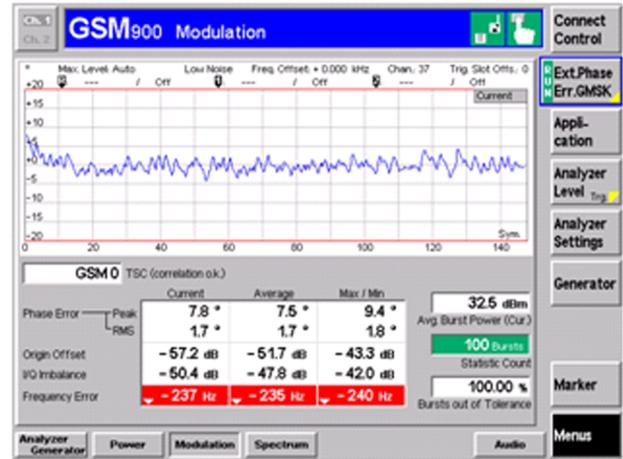

Modulation/Switching spectrum

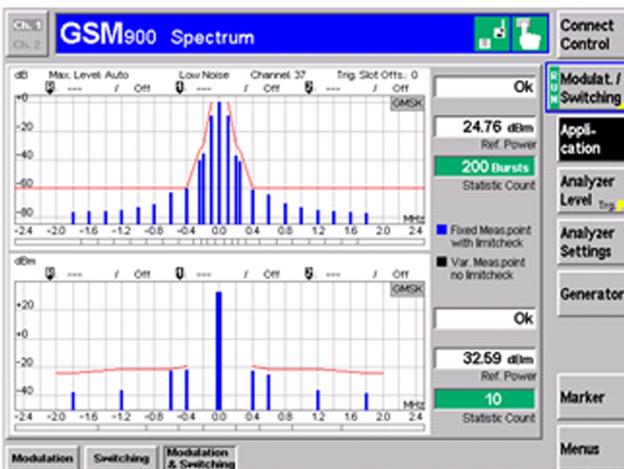

Power/Burst

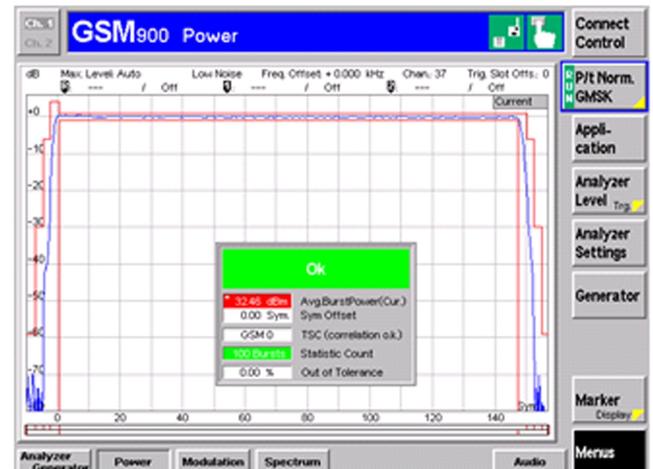

Edge



Figure 20 Typical readings

4. Change power level (RF controls) and make sure the power reading follows accordingly.

**Next actions**

TX is failing and RX is OK: replace N1002

If you want to troubleshoot the other bands, change band with RF controls and set the communication analyzer accordingly.

■ **Bluetooth and FM radio troubleshooting**

**Bluetooth troubleshooting**

**Troubleshooting flow**


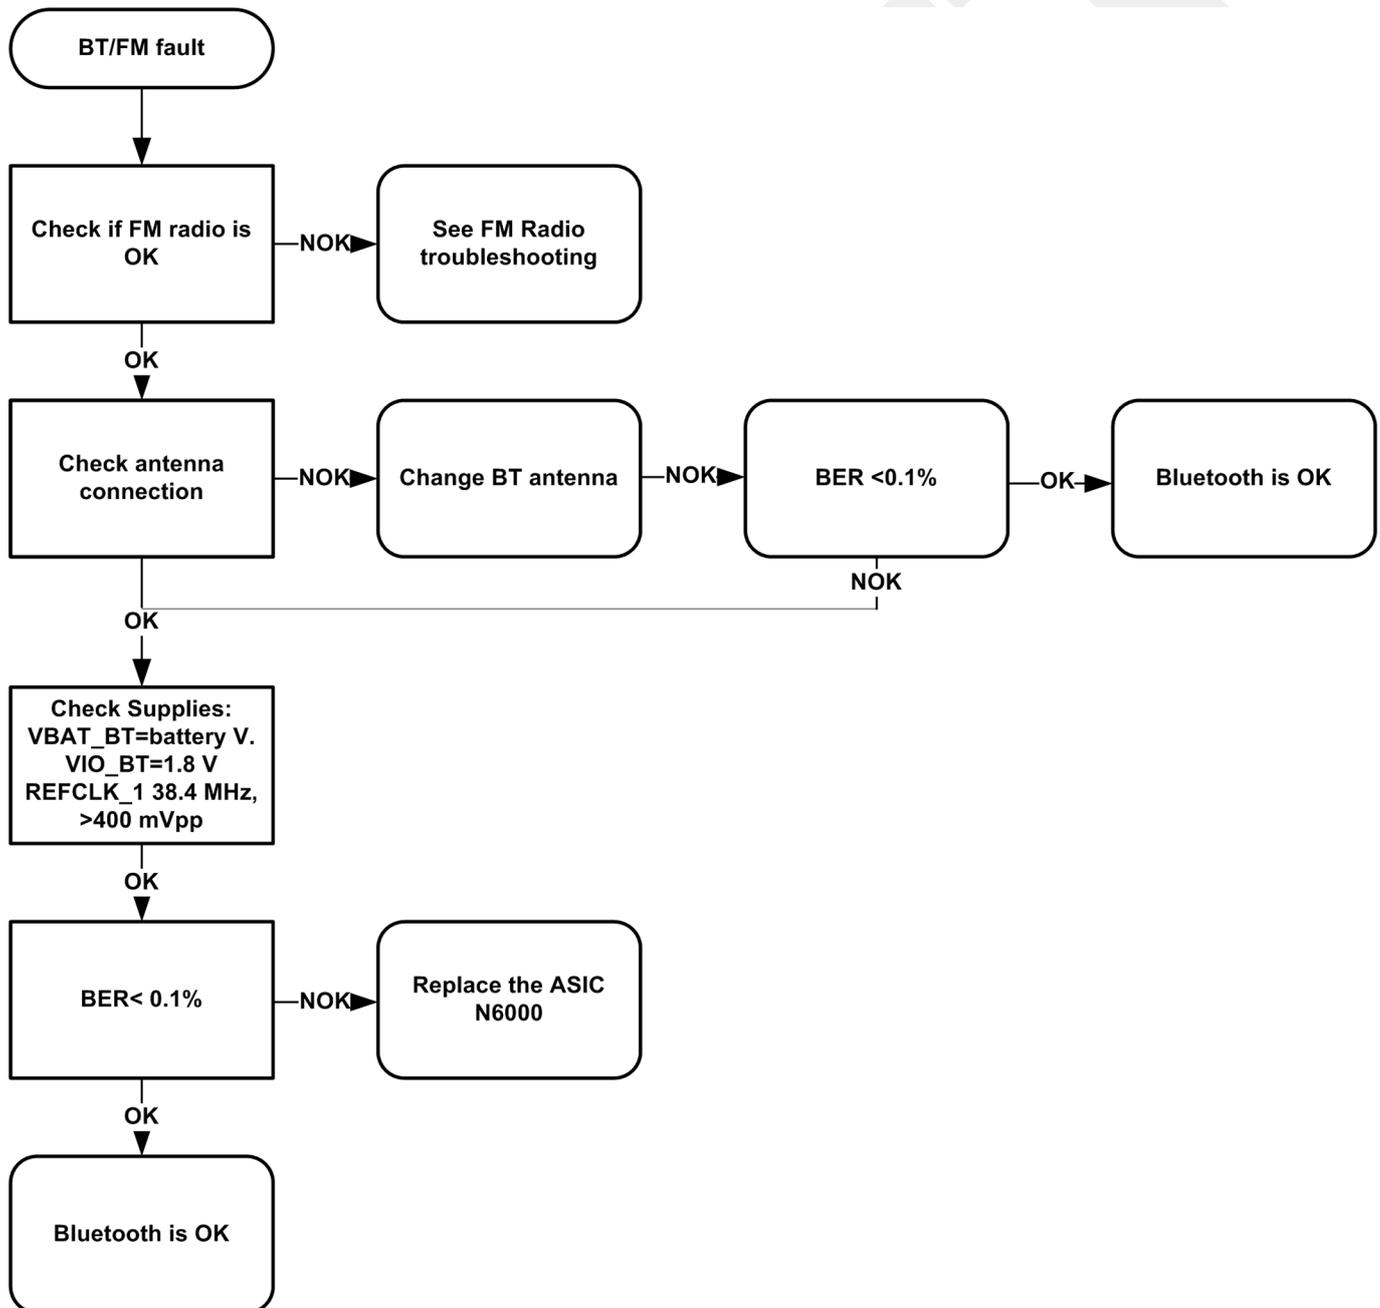


Figure 21 Troubleshooting diagram: Bluetooth

## FM radio troubleshooting

### Troubleshooting flow

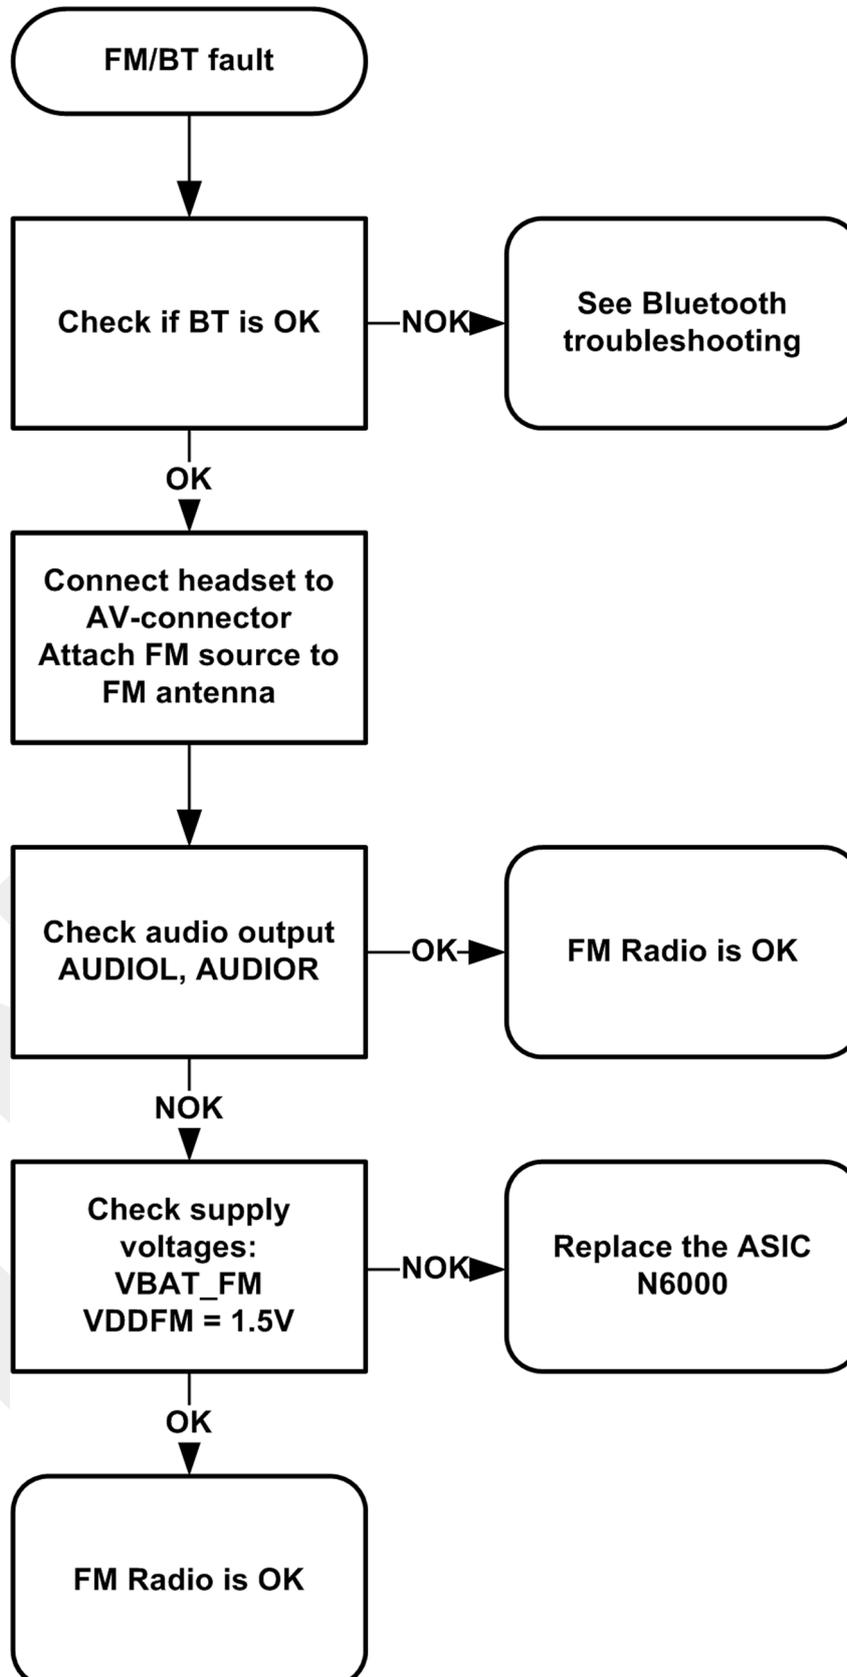

(This page left intentionally blank.)

## 5 — System Module

(This page left intentionally blank.)

## Table of Contents

Introduction.....	5-5
Phone description.....	5-5
Energy management.....	5-7
Battery and charging.....	5-7
Normal and extreme voltages.....	5-8
Power key and system power-up.....	5-9
Modes of operation.....	5-9
USB, SIM, $\mu$ SD.....	5-9
Micro USB.....	5-9
SIM interface.....	5-9
$\mu$ SD card interface.....	5-10
User interface.....	5-11
Display module.....	5-11
Keyboard.....	5-11
Backlight and illumination.....	5-11
Audio concept.....	5-12
AV connector.....	5-13
RF description.....	5-14
Receiver (RX).....	5-14
Transmitter (TX).....	5-14
Bluetooth.....	5-15
Technical specifications.....	5-15
Main RF characteristics for GSM band phone.....	5-15
Environmental conditions.....	5-16

### List of Tables

Table 7 Nominal voltages.....	5-8
Table 8 Key signal matrix.....	5-11
Table 9 AV connector pins.....	5-13

### List of Figures

Figure 22 Battery pin order.....	5-7
Figure 23 Battery connector.....	5-8
Figure 24 SIM interface.....	5-10
Figure 25 Audio block diagram.....	5-12
Figure 26 Bluetooth interface.....	5-15

(This page left intentionally blank.)

## ■ Introduction

### Phone description


RAP is the main digital baseband ASIC in the phone. It contains functionality for GSM EDGE. The hardware accelerator is used as a camera accelerator.


N2200 (AVILMA) is mainly the audio ASIC in the phone and N2300 (BETTY) is basically the energy management controller for the phone.

### Key components


Function	Description	Item ref
Main board	2n1a	
Energy management ASIC	AVILMA BETTY	N2200 N2300
RF ASIC	RF IC	N1001
Processor	RAPS_V3.03-PA	D2800
PA GSM	Front end module (FEM), quad band	N1002
Memory	512 Mbit NOR + 256 Mbit DRAM Combo (Stacked with RAP)	D3000
Bluetooth	BCM2048	N6000
Battery	BL-5CT 1050mAh	
Battery connector	Blade interface	X2070
µUSB connector	For data, support USB full speed	AV flex: X2002

### Key component placement

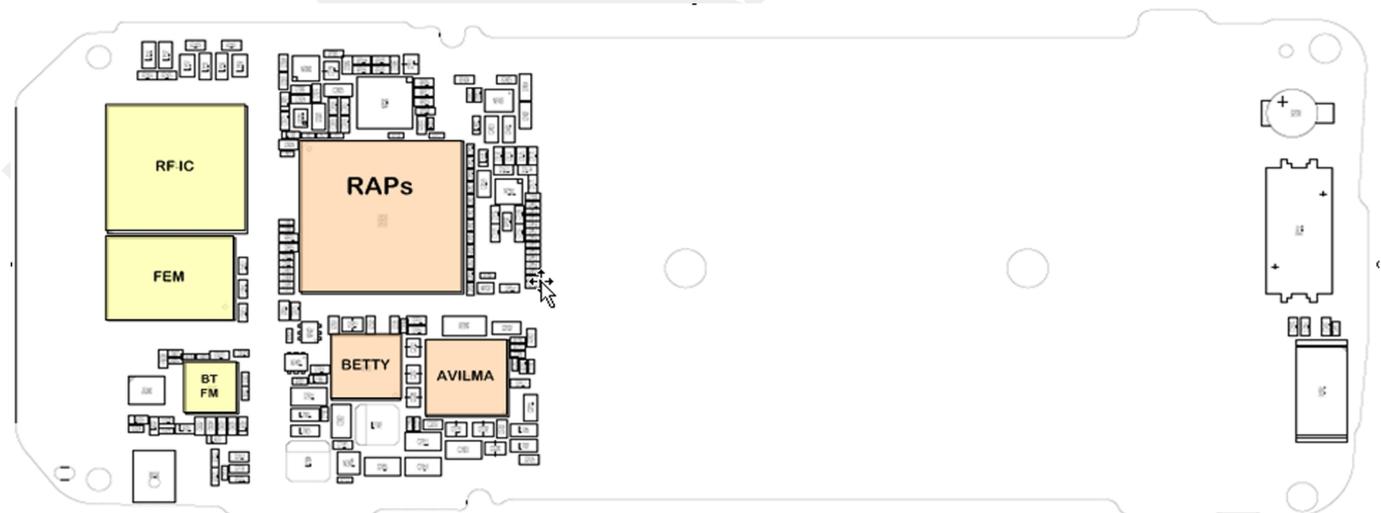


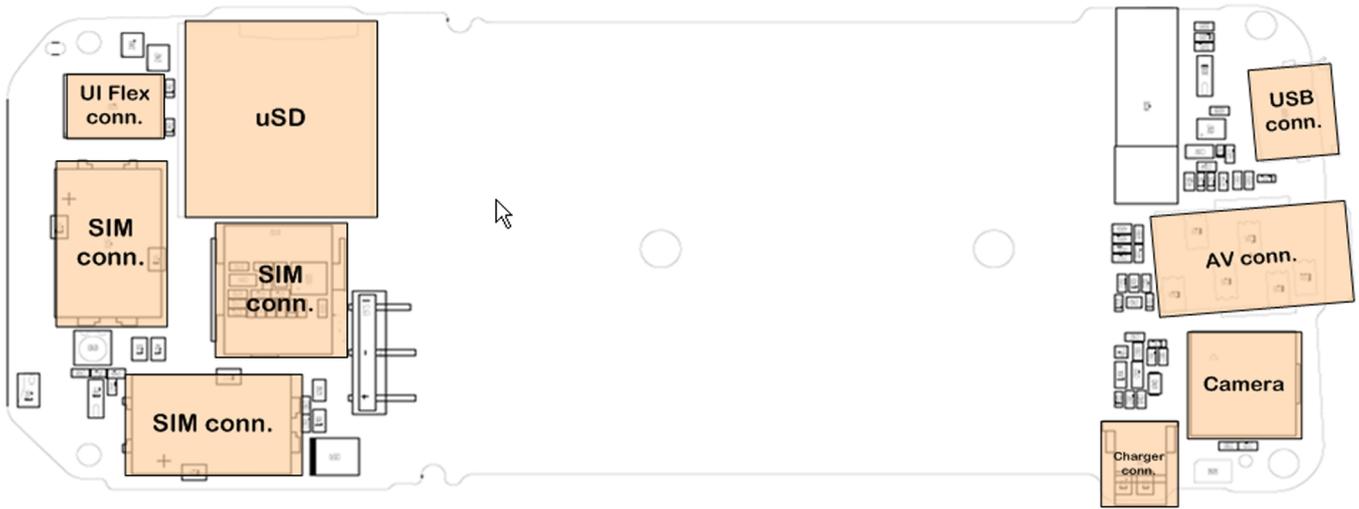

**System module block diagram**

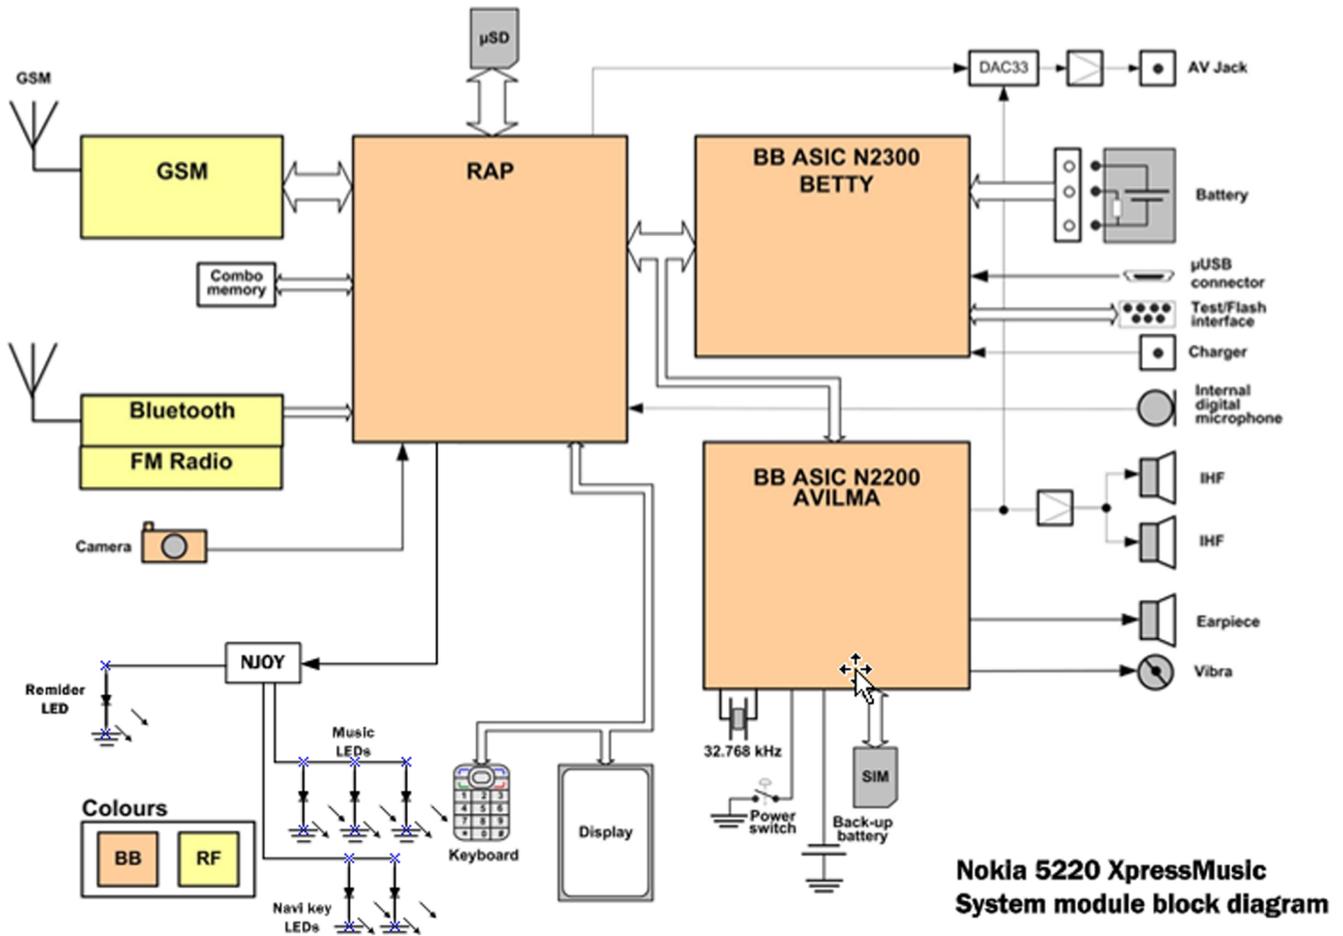

**Board and module connections**

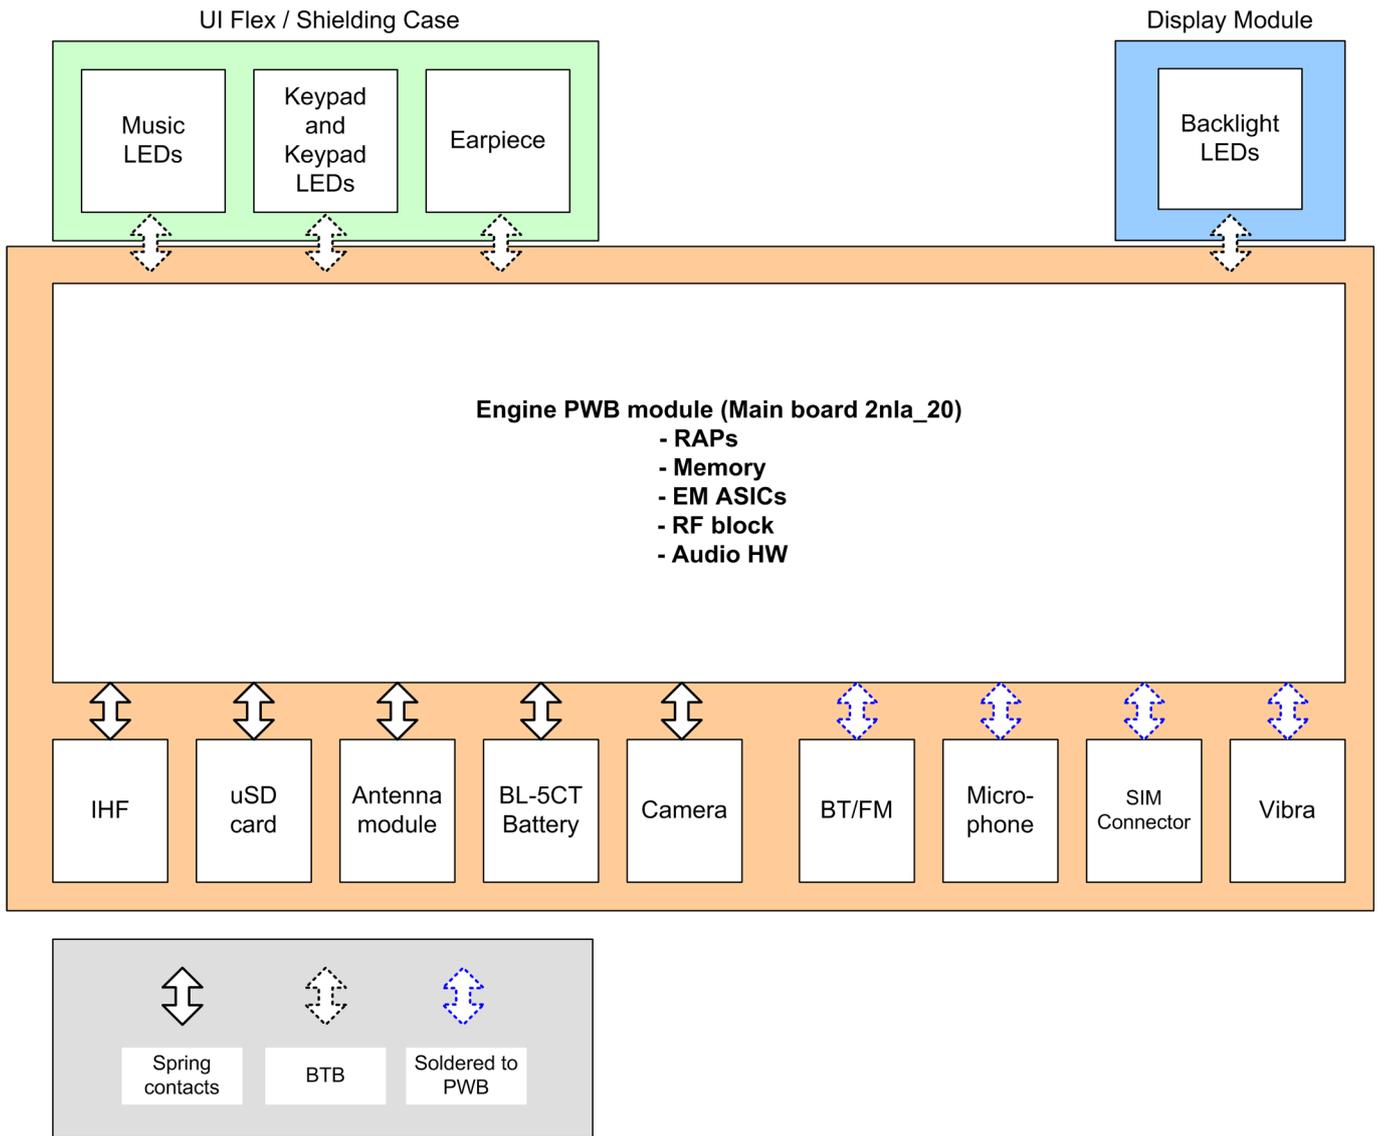


■ **Energy management**

**Battery and charging**

**BL-5CT battery**

The phone is powered by a 3-pole BL-5CT 1050 mAh battery. The three poles are named VBAT, BSI and GND where the BSI line is used to recognize the battery capacity. This is done by means of an internal battery pull down resistor.

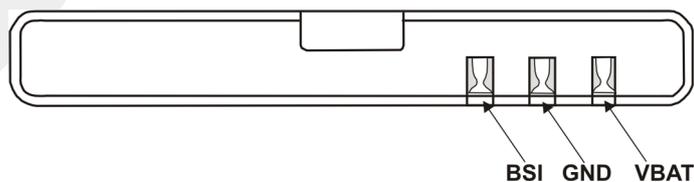

**Figure 22 Battery pin order**

The battery temperature can be measured from the UI flex.

## Battery connector

The battery connector is a blade connector. It has three blades;

- BSI (Battery size indicator)
- GND (Ground)
- VBAT (Battery voltage)

The BSI line is used to recognize the battery capacity by a battery internal pull down resistor.

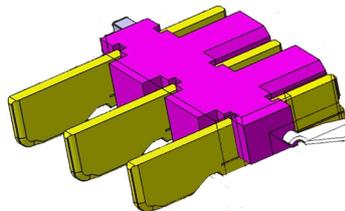


Figure 23 Battery connector

## Charging

This phone is charged through a separate charger connector.

Charging is controlled by energy management, and external components are needed to protect the baseband module against EMC, reverse polarity and transient frequency deviation.

## Normal and extreme voltages

Energy management is mainly carried out in the two Application Specific Integrated Circuits (ASICs) N2300 BETTY and N2200 AVILMA. These two circuits contains a number of regulators. In addition there are some external regulators too.

In the table below normal and extreme voltages are shown when a BL-5CT battery is used.

Table 7 Nominal voltages

Voltage	Voltage [V]	Condition
General Conditions		
Nominal voltage	4.0	
Lower extreme voltage	3.145	
Higher extreme voltage (fast charging)	4.230	
HW Shutdown Voltages		
Vmstr+	2.1 ± 0.1	Off to on
Vmstr-	1.9 ± 0.1	On to off
SW Shutdown Voltages		
Sw shutdown	3.106	In call
Sw shutdown	3.2	In idle
Min Operating Voltage		
Vcoff+	2.9 ± 0.1	Off to on
Vcoff-	2.6 ± 0.1	On to off

## Power key and system power-up

When the battery is placed in the phone the power key circuits are energized. When the power key is pressed, the system boots up (if an adequate battery voltage is present).

Power down can be initiated by pressing the power key again (the system is powered down with the aid of SW). The power key is connected to EM ASIC N2200 (AVILMA) via PWRONX signal.

## Modes of operation

Mode	Description
NO_SUPPLY	(dead) mode means that the main battery is not present or its voltage is too low (below N2200 AVILMA master reset threshold) and that the back-up battery voltage is too low.
BACK_UP	The main battery is not present or its voltage is too low but back-up battery voltage is adequate and the 32 kHz oscillator is running (RTC is on).
PWR_OFF	In this mode (warm), the main battery is present and its voltage is over N2300 BETTY master reset threshold. All regulators are disabled, PurX is on low state, the RTC is on and the oscillator is on. PWR_OFF (cold) mode is almost the same as PWR_OFF (warm), but the RTC and the oscillator are off.
RESET	RESET mode is a synonym for start-up sequence. RESET mode uses 32 kHz clock to count the REST mode delay (typically 16ms).
SLEEP	SLEEP mode is entered only from PWR_ON mode with the aid of SW when the system's activity is low.
FLASHING	FLASHING mode is for SW downloading.

## ■ USB, SIM, μSD


### Micro USB

The micro USB (Universal Serial Bus) provides a wired connectivity between a PC and peripheral devices. It is a differential serial bus.

USB 2.0 is supported with full speed (12 Mbps).

Hot swap is supported, which means that USB devices may be plugged in/out at any time.

This phone is provided with a specific connector for μUSB.

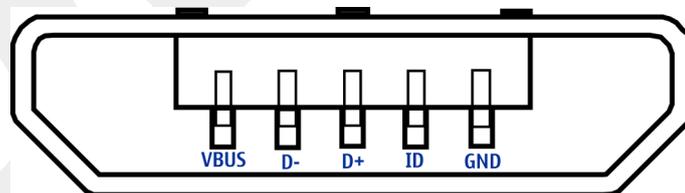

### SIM interface

The device has one SIM (Subscriber Identification Module) interface. It is only accessible if battery is removed. The SIM interface consists of an internal interface between RAP and EM ASIC AVILMA (N2200), and of an external interface between N2200 and SIM contacts.

The SIM IF is shown in the following figure:


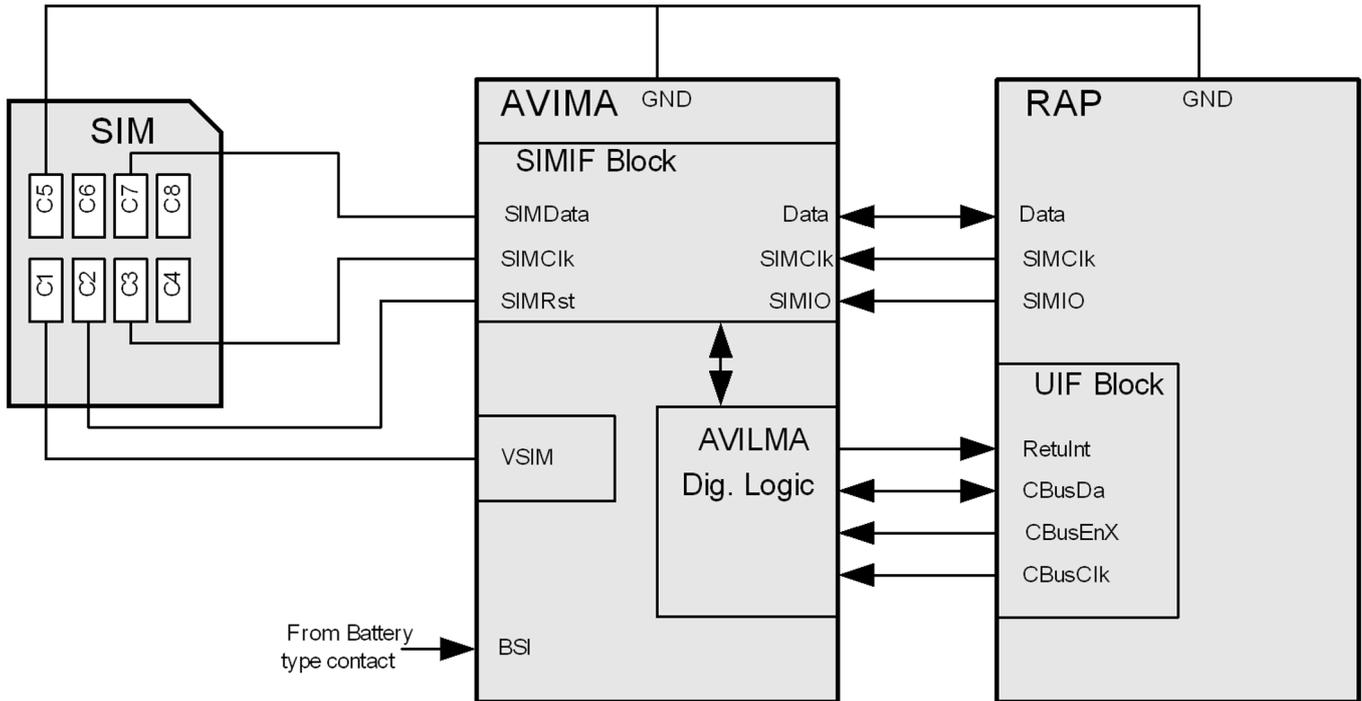


Figure 24 SIM interface

The EM ASIC AVILMA handles the detection of the SIM card. The detection method is based in the BSI line. Because of the location of the SIM card, removing the battery causes a quick power down of the SIM interface. The SIM interface supports both 1.8 V and 3.0 V SIM cards. The SIM interface voltage is first 1.8 V when the SIM card is inserted, and if the card does not response to the ATR a 3 V interface voltage is used.

### µSD card interface

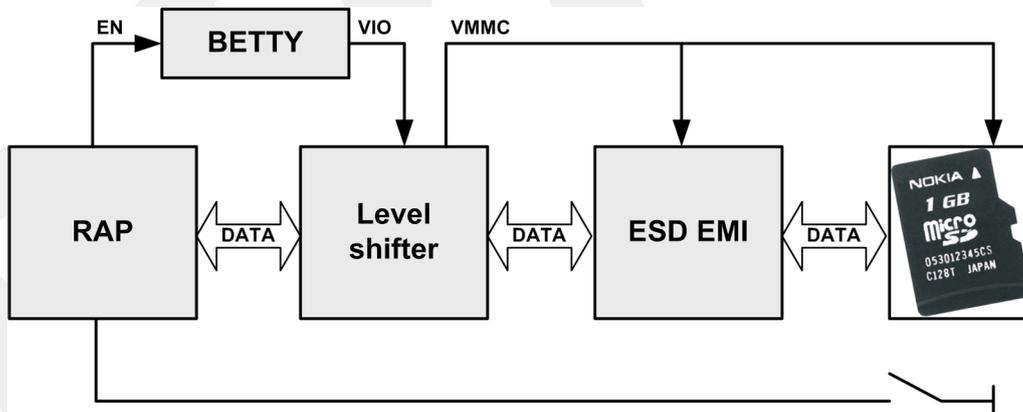

The µSD card is connected to the engine by an external level shifter and ESD protection filter. Supplied voltages:

- VMMC: 2.85 V (from level shifter)
- VIO: 1.8 V (from AVILMA)

The card removal is detected by a push detect switch.

■ **User interface**

**Display module**

The interconnection between the LCD module and the engine is implemented with a 24-pin board-to-board connector.

The LCD module does not require any tuning in service.

**Keyboard**


Table 8 Key signal matrix

GENIO	ROW	Col_0 (GENIO-39)	Col_0 (GENIO-40)	Col_0 (GENIO-41)	Col_0 (GENIO-42)
32	ROW0	Left SK	Left	Right SK	Up
33	ROW1	Send	Right	End	Down
34	ROW2	1	2	3	Centre
35	ROW3	4	5	6	Vol +
36	ROW4	7	8	9	Vol -
37	ROW5	*	0	#	Rewind

**Backlight and illumination**

There is backlight illuminating for the display consisting of 2 LEDs.

The keypad is top lit by 7 LEDs.

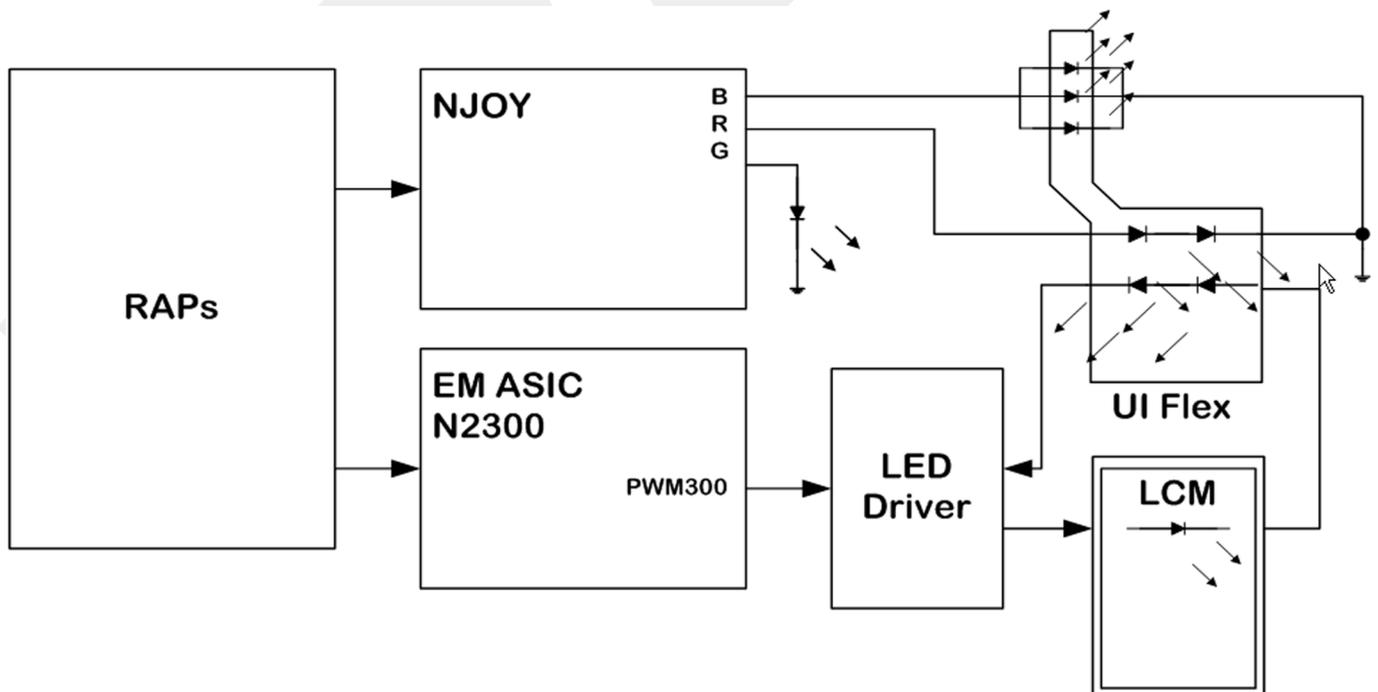

■ Audio concept

This phone has a conventional solution on earpiece and vibra. Both are handled by AVILMA N2200. Two integrated handsfree speakers are driven by an additional amplifier also handled by AVILMA. The microphone has a digital interface and its RF-filtered lines are directly connected to RAP D2800 for processing.

Since this phone has focus on audio playback, it contains improved circuits for audio handling. The DAC33 is a D/A-converter that offers better signal to noise ratio than conventional circuits. This improves the playback audio quality significantly. The playback audio (e.g. music stored in the phone or on the micro USB) is processed from RAP D2800 via DAC33 and an amplifier to the AV-connector (for e.g. headset). The DAC33 contains a FIFO memory that can store up to 85ms of playback time (allowing D2800 to go to sleep mode and save energy). The entire audio playback circuits are optimized to save energy and improve audio quality and the energy saving is quite significant (more than 50%, which means longer playback time than in a conventional design).

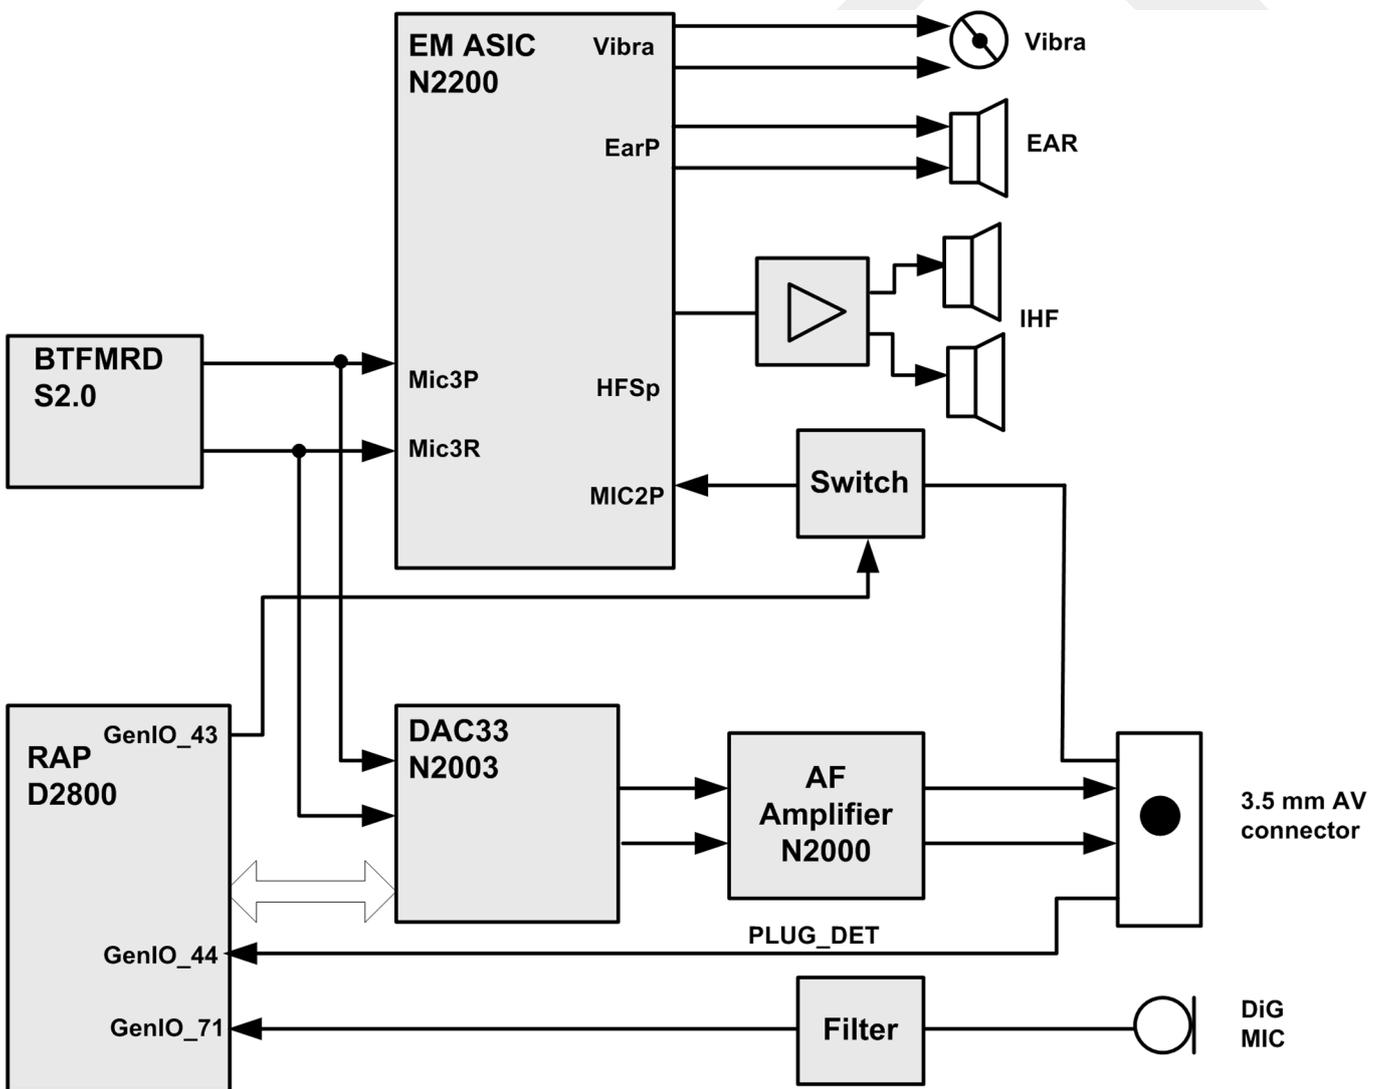


Figure 25 Audio block diagram

The Plug detector (PLUG\_DET) in the AV connector enables the external microphone, when the phone function is used. The headset earphones will still be processed via DAC33 (without using the power saving mode). The audio quality will to some extent be improved (saying other links in the audio chain doesn't have the same high quality as the playback channel has).

**■ AV connector**

The AV connector is used to connect headsets both in the handsfree phone function and for using the phone as a media player (see the audio concept heading). The six pins are used in accordance with the table below. A connected male connector is detected on pin 6 (PLUG\_DET).

**Note:** Only use an approved cable for connecting to the AV connector ( e.g. headset HS-45).

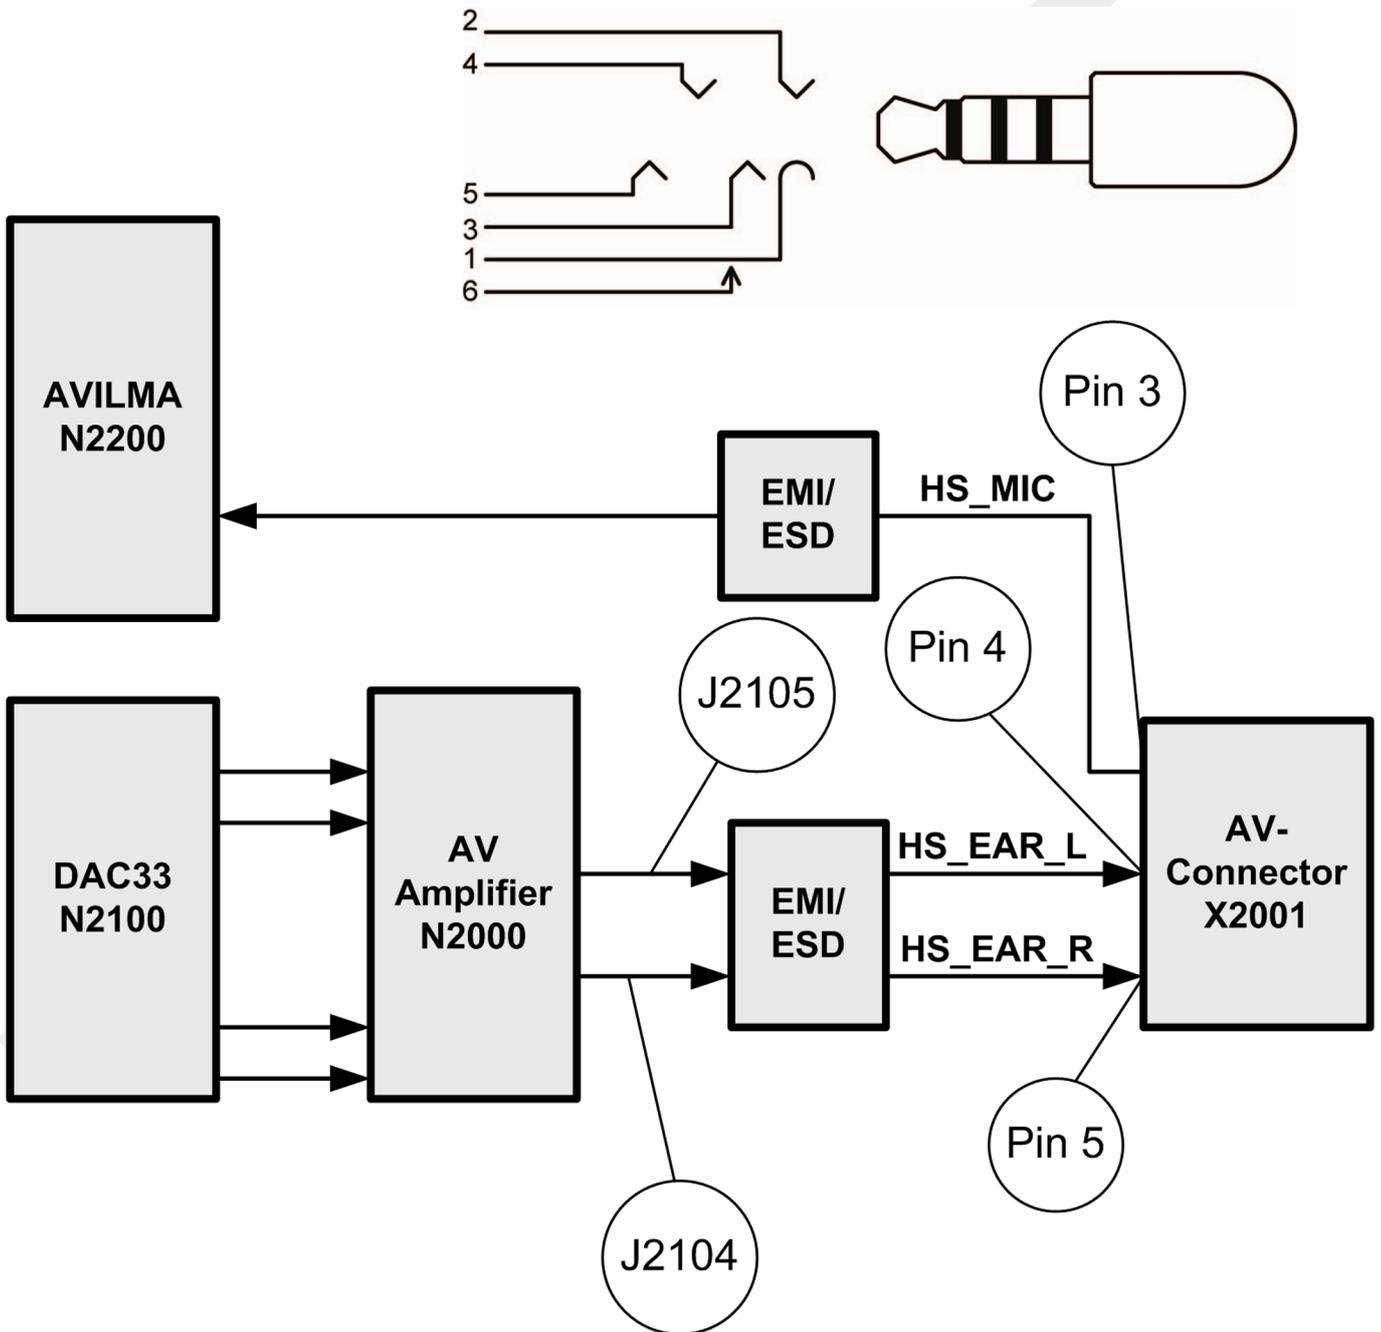


Table 9 AV connector pins

Pin	Signal name	Direction	Description
1, 2	HS_GND	-	Ground)
3	HS_MIC	Input	Microphone

Pin	Signal name	Direction	Description
4	HS_EAR_R	Output	Audio out
5	HS_EAR_L	Output	Audio out
6	PLUG_DET	Input	Plug detection


## RF description

### Receiver (RX)

An analogue signal is received by the phone's antenna. The signal is converted to a digital signal and is then transferred further to the baseband (eg. to the earpiece).

The receiver functions are implemented in the RF ASIC.


Signals with different frequencies take different paths, therefore being handled by different components.

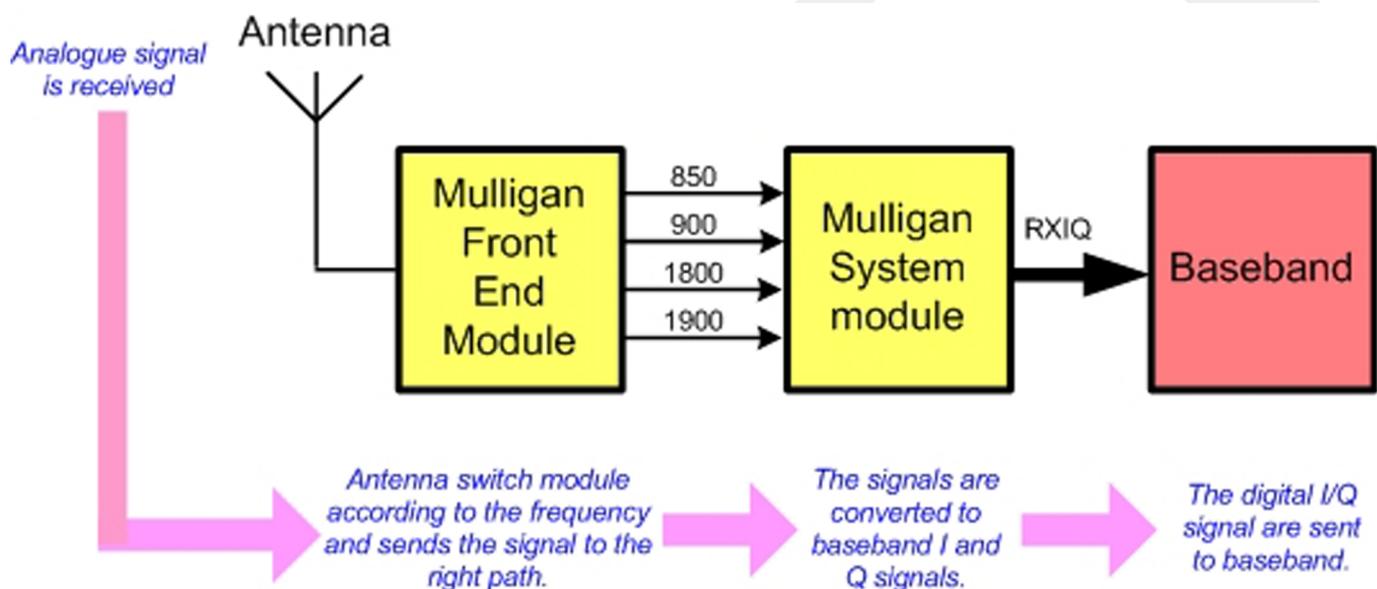

### Transmitter (TX)

The digital baseband signal (eg. from the microphone) is converted to an analogue signal, which is then amplified and transmitted from the antenna. The frequency of this signal can be tuned to match the bandwidth of the system in use (eg. GSM900).

The transmitter functions are implemented in the RF ASIC.

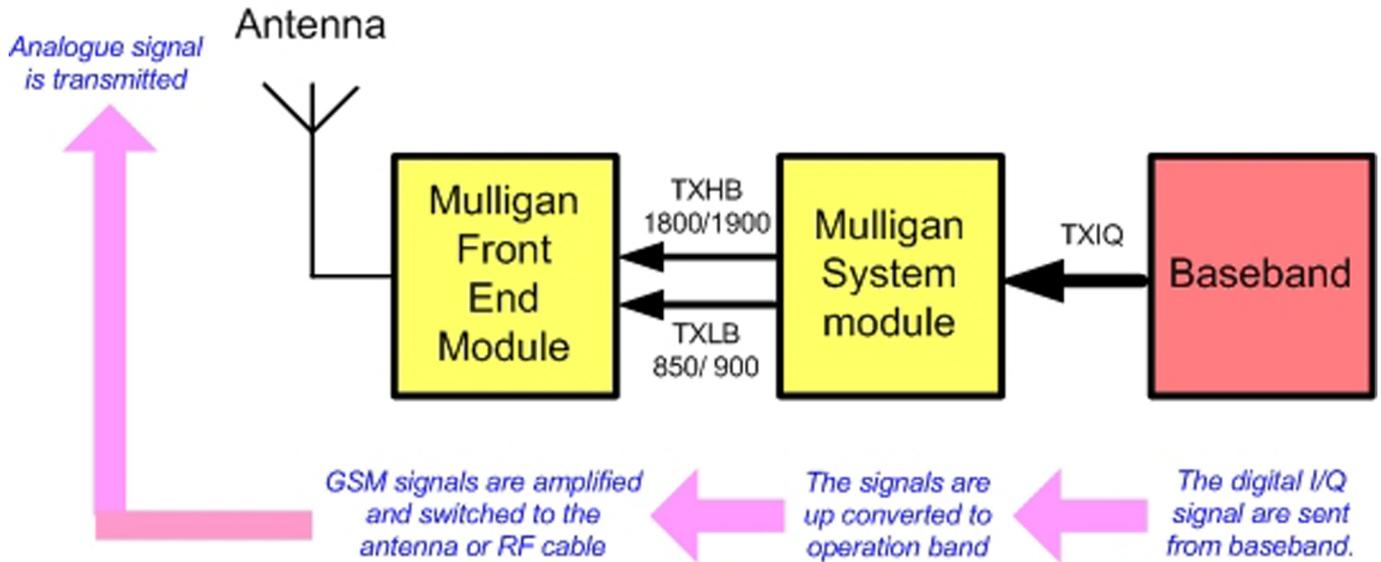

**Bluetooth**

Bluetooth provides a fully digital link for communication between a master unit (the phone) and one or more slave units (e.g. a wireless headset). Data and control interface for a low power RF module is provided by the module.

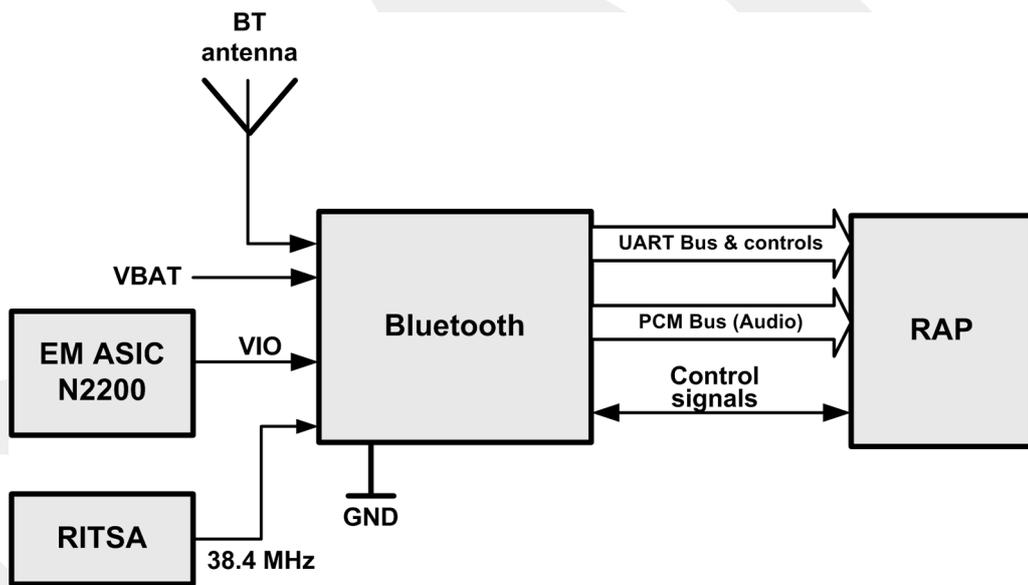


Figure 26 Bluetooth interface

The Bluetooth has a separate built in antenna and is powered by VBAT and the regulated voltage VIO. For audio applications the Bluetooth has a PCM data bus. In addition a UART (universal asynchronous receiver/transmitter) is used for data communication and controls.

■ **Technical specifications**

**Main RF characteristics for GSM band phone**

Parameter	Unit
Cellular system	EGSM850/900/1800/1900

Parameter	Unit
RX frequency band	EGSM850: 869- 894 MHz
	EGSM900: 925- 960 MHz
	GSM1800: 1805 - 1880 MHz
	GSM1900: 1930 - 1990 MHz
TX frequency band	GSM850: 824- 849 MHz
	GSM900: 880- 915 MHz
	GSM1800: 1710 - 1785 MHz
	GSM1900: 1850 - 1910 MHz
Output power	GSM850: +5 ... +33
	EGSM900: +5 ... +33 dBm
	GSM1800: +0 ... +30 dBm
	GSM1900: +0 ... +30 dBm
Number of RF channels	GSM850: 124
	EGSM900: 172
	GSM1800: 375
	GSM1900: 300
Channel spacing	GSM 200 KHz
Number of Tx power levels	GSM850: 15
	GSM900: 15
	GSM1800: 16
	GSM1900: 16

### Environmental conditions

Environmental condition	Ambient temperature	Notes
Normal operation	-15 °C ... +55 °C	Specifications fulfilled
Reduced performance	55 °C ... +70 °C	Operational only for short periods
Intermittent or no operation	-40 °C ... -15 °C and +70 °C ... +85°C	Operation not guaranteed but an attempt to operate will not damage the phone
No operation or storage	<-40 °C and >+85 °C	No storage. An attempt to operate may cause permanent damage
Charging allowed	-15 °C ... +55 °C	
Long term storage conditions	0 °C ... +85 °C	

Environmental condition	Ambient temperature	Notes
Humidity and water resistance		Relative humidity range is 5 to 95%. Condensed or dripping water may cause intermittent malfunctions. Protection against dripping water has to be implemented in (enclosure) mechanics. Continuous dampness will cause permanent damage to the module.

(This page left intentionally blank.)

# Nokia Customer Care

## Glossary

(This page left intentionally blank.)

A/D-converter	Analogue-to-digital converter
ACI	Accessory Control Interface
ADC	Analogue-to-digital converter
ADSP	Application DPS (expected to run high level tasks)
AGC	Automatic gain control (maintains volume)
ALS	Ambient light sensor
AMSL	After Market Service Leader
ARM	Advanced RISC Machines
ARPU	Average revenue per user (per month or per year)
ASIC	Application Specific Integrated Circuit
ASIP	Application Specific Interface Protector
B2B	Board to board, connector between PWB and UI board
BA	Board Assembly
BB	Baseband
BC02	Bluetooth module made by CSR
BIQUAD	Bi-quadratic (type of filter function)
BSI	Battery Size Indicator
BT	Bluetooth
CBus	MCU controlled serial bus connected to UPP_WD2, UEME and Zocus
CCP	Compact Camera Port
CDMA	Code division multiple access
CDSP	Cellular DSP (expected to run at low levels)
CLDC	Connected limited device configuration
CMOS	Complimentary metal-oxide semiconductor circuit (low power consumption)
COF	Chip on Foil
COG	Chip on Glass
CPU	Central Processing Unit
CSD	Circuit-switched data
CSR	Cambridge silicon radio
CSTN	Colour Super Twisted Nematic
CTSI	Clock Timing Sleep and interrupt block of Tiku
CW	Continuous wave
D/A-converter	Digital-to-analogue converter
DAC	Digital-to-analogue converter
DBI	Digital Battery Interface
DBus	DSP controlled serial bus connected between UPP_WD2 and Helgo

DCT-4	Digital Core Technology
DMA	Direct memory access
DP	Data Package
DPLL	Digital Phase Locked Loop
DSP	Digital Signal Processor
DTM	Dual Transfer Mode
DtoS	Differential to Single ended
EDGE	Enhanced data rates for global/GSM evolution
EGSM	Extended GSM
EM	Energy management
EMC	Electromagnetic compatibility
EMI	Electromagnetic interference
ESD	Electrostatic discharge
FCI	Functional cover interface
FPS	Flash Programming Tool
FR	Full rate
FSTN	Film compensated super twisted nematic
GMSK	Gaussian Minimum Shift Keying
GND	Ground, conductive mass
GPIO	General-purpose interface bus
GPRS	General Packet Radio Service
GSM	Group Special Mobile/Global System for Mobile communication
HSDPA	High-speed downlink packet access
HF	Hands free
HFCM	Handsfree Common
HS	Handset
HSCSD	High speed circuit switched data (data transmission connection faster than GSM)
HW	Hardware
I/O	Input/Output
IBAT	Battery current
IC	Integrated circuit
ICHA	Charger current
IF	Interface
IHF	Integrated hands free
IMEI	International Mobile Equipment Identity
IR	Infrared

IrDA	Infrared Data Association
ISA	Intelligent software architecture
JPEG/JPG	Joint Photographic Experts Group
LCD	Liquid Crystal Display
LDO	Low Drop Out
LED	Light-emitting diode
LPRF	Low Power Radio Frequency
MCU	Micro Controller Unit (microprocessor)
MCU	Multiport control unit
MIC, mic	Microphone
MIDP	Mobile Information Device Profile
MIN	Mobile identification number
MIPS	Million instructions per second
MMC	Multimedia card
MMS	Multimedia messaging service
MTP	Multipoint-to-point connection
NFC	Near field communication
NTC	Negative temperature coefficient, temperature sensitive resistor used as a temperature sensor
OMA	Object management architecture
OMAP	Operations, maintenance, and administration part
Opamp	Operational Amplifier
PA	Power amplifier
PDA	Pocket Data Application
PDA	Personal digital assistant
PDRAM	Program/Data RAM (on chip in Tiku)
Phoenix	Software tool of DCT4.x and BB5
PIM	Personal Information Management
PLL	Phase locked loop
PM	(Phone) Permanent memory
PUP	General Purpose IO (PIO), USARTS and Pulse Width Modulators
PURX	Power-up reset
PWB	Printed Wiring Board
PWM	Pulse width modulation
RC-filter	Resistance-Capacitance filter
RF	Radio Frequency

RF PopPort™	Reduced function PopPort™ interface
RFBUS	Serial control Bus For RF
RSK	Right Soft Key
RS-MMC	Reduced size Multimedia Card
RSS	Web content Syndication Format
RSSI	Receiving signal strength indicator
RST	Reset Switch
RTC	Real Time Clock (provides date and time)
RX	Radio Receiver
SARAM	Single Access RAM
SAW filter	Surface Acoustic Wave filter
SDRAM	Synchronous Dynamic Random Access Memory
SID	Security ID
SIM	Subscriber Identity Module
SMPS	Switched Mode Power Supply
SNR	Signal-to-noise ratio
SPR	Standard Product requirements
SRAM	Static random access memory
STI	Serial Trace Interface
SW	Software
SWIM	Subscriber/Wallet Identification Module
TCP/IP	Transmission control protocol/Internet protocol
TCXO	Temperature controlled Oscillator
Tiku	Finnish for Chip, Successor of the UPP
TX	Radio Transmitter
UART	Universal asynchronous receiver/transmitter
UEME	Universal Energy Management chip (Enhanced version)
UEMEK	See UEME
UI	User Interface
UPnP	Universal Plug and Play
UPP	Universal Phone Processor
UPP_WD2	Communicator version of DCT4 system ASIC
USB	Universal Serial Bus
VBAT	Battery voltage
VCHAR	Charger voltage
VCO	Voltage controlled oscillator

VCTCXO	Voltage Controlled Temperature Compensated Crystal Oscillator
VCXO	Voltage Controlled Crystal Oscillator
VF	View Finder
Vp-p	Peak-to-peak voltage
VSIM	SIM voltage
WAP	Wireless application protocol
WCDMA	Wideband code division multiple access
WD	Watchdog
WLAN	Wireless local area network
XHTML	Extensible hypertext markup language
Zocus	Current sensor (used to monitor the current flow to and from the battery)

(This page left intentionally blank.)