


# ACM-DB-3-R2

Rugged/Military grade 2.4/5 GHz 2x2 MIMO Wi-Fi® Radio Transceivers

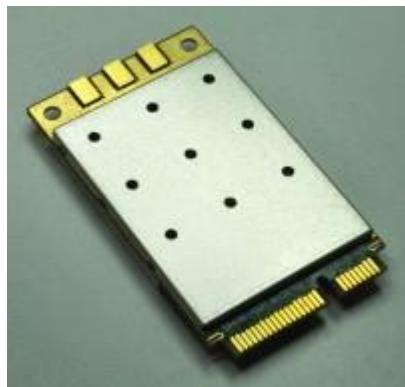

## Features

- Qualcomm-Atheros QCA9890-BR4B Chipset with Extended Temperature Range
- Up to 1.3 Gbps Throughput with 2x2 MIMO Technology
- Calibrated High Power 2.4 GHz (29 dBm) and 5 GHz operation (27 dBm) for Extended Range
- 802.11 Dynamic Frequency Selection (DFS) in AP and Client mode
- Supported by OpenWRT and Ath10k Open-Source Driver
- MiniPCIE Interface

## Installation and Usage

The ACM-DB-3-R2 has been FCC certified for indoor usage with Superbat 3-dBi rubber-duck antennas (WA2-1321-S02SP1-030 in the 5-GHz bands, and WA2-995-S02SP1-030 antennas in the 2.4GHz band). The ACM-DB-3 mates with a standard PCIE-mini slot and integrates with the Ath10k software driver which is pre-installed in Linux-based systems.

TECHNICAL SPECIFICATIONS					
Model No.	ACM-DB-3-R2 (Rugged/Military Applications, 802.11ac)				
MAC Chipset	QCA9890-BR4B with Extended Temperature range for Outdoor and Rugged models)				
Software Support	Open Source Linux Driver <a href="#">ath10k</a> <a href="#">OpenWRT</a> (Wireless Router/Linux OS)				
Center Frequency Range	5.180 GHz ~ 5.825 GHz 2.412 GHz ~ 2.462 GHz This varies by the regulatory domain				
Channel Bandwidth/(No. of Non-overlapping Channels)*	20/(27), 40/(13) and 80/(6) MHz channels (5.x GHz) 20/(3), and 40/(1) MHz channels (2.4 GHz)				
Radio Modulation (Auto Adjust)	BPSK, QPSK, 16 QAM, 64 QAM and 256 QAM (5.x GHz – 11ac models) CCK, BPSK, QPSK, 16 QAM, and 64 QAM (2.4 GHz – 11ac models)				
Data Rates Supported	<a href="#">802.11ac</a> : MCS0-9 (5.x GHz) <a href="#">802.11a</a> : 6, 9, 12, 18, 24, 36, 48 and 54 Mbps (5.x GHz) <a href="#">802.11n</a> : MCS0-23 (5.x and 2.4 GHz) <a href="#">802.11b/g</a> : 1, 2, 5.5, 6, 9, 11, 12, 18, 24, 36, 48 and 54 Mbps (2.4 GHz)				
802.11ac Wave 1 Capabilities	<ul style="list-style-type: none"> <li>802.11 dynamic frequency selection (DFS) as an AP and Client</li> <li>802.11ac Beam Forming</li> <li>Packet aggregation: A-MPDU (Tx/Rx), A-MSDU (Tx/Rx), Maximal ratio combining (MRC), Cyclic shift diversity (CSD), Frame aggregation, block ACK, 802.11e compatible bursting, Spatial multiplexing, cyclic-delay diversity (CDD), low-density parity check (LDPC), Space Time Block Code (STBC)</li> <li>Phy data rates up to 1.3 Gbps (80 MHz channel)</li> </ul>				
Operating Modes	AP, STA and Adhoc modes to implement Point to Point, Point to multi Point, and Mesh networks				
MAC Protocol	TDD with Carrier Sense Multiple Access with Collision Avoidance (CSMA/CA)				
Wireless Error Correction	FEC, ARQ				
Wireless Data Security	128 bit AES, WEP, TKIP and WAPI hardware encryption. Support for IEEE 802.11d, e, h, i, k, r, v, w and time stamp standards				
FIPS Certification	Loop back mode to facilitate FIPS AES certification, Small packet size (96 bytes) in AES encryption at full packet rate				
Tx/Rx Specification	Data Rate	Radio Modulation	Throughput** Mbps (Cabled Test Setup)	Max Tx Power (± 2 dBm) 3 Antennas	Rx Sensitivity (± 2 dBm) 3 Antennas
<b>5 GHz (20 MHz Channel)</b>					
802.11a, Single Stream, STBC	6 Mbps	BPSK	5.5	27	-98
802.11a, Single Stream, STBC	24 Mbps	16 QAM	19	27	-89
802.11a, Single Stream, STBC	36 Mbps	16 QAM	25	25	-87
802.11a, Single Stream, STBC	48 Mbps	64 QAM	29	25	-85
802.11a, Single Stream, STBC	54 Mbps	64 QAM	33	24	-83
802.11ac, VHT20, 3 Streams	<a href="#">MCS0</a>	BPSK	18	27	-93
802.11ac, VHT20, 3 Streams	<a href="#">MCS2</a>	QPSK	54	27	-89
802.11ac, VHT20, 3 Streams	<a href="#">MCS4</a>	16 QAM	106	26	-82
802.11ac, VHT20, 3 Streams	<a href="#">MCS7</a>	64 QAM	171	23	-74
802.11ac, VHT20, 3 Streams	<a href="#">MCS8</a>	256 QAM	201	22	-70
<b>5 GHz (40 MHz Channel)</b>					
802.11ac, VHT40, 3 Streams	<a href="#">MCS0</a>	BPSK	37	27	-90
802.11ac, VHT40, 3 Streams	<a href="#">MCS2</a>	QPSK	110	27	-82
802.11ac, VHT40, 3 Streams	<a href="#">MCS4</a>	16 QAM	210	26	-78
802.11ac, VHT40, 3 Streams	<a href="#">MCS7</a>	64 QAM	331	23	-71

802.11ac, VHT40, 3 Streams	MCS8	256 QAM	405	22	-68
802.11ac, VHT40, 3 Streams	MCS9	256 QAM	429	21	-66
<b>5 GHz (80 MHz Channel)</b>					
802.11ac, VHT80, 3 Streams	MCS0	BPSK	76	27	-87
802.11ac, VHT80, 3 Streams	MCS2	QPSK	223	27	-81
802.11ac, VHT80, 3 Streams	MCS4	16 QAM	404	26	-72
802.11ac, VHT80, 3 Streams	MCS7	64 QAM	622	23	-66
802.11ac, VHT80, 3 Streams	MCS8	256 QAM	686	21	-64
802.11ac, VHT80, 3 Streams	MCS9	256 QAM	789	21	-62
<b>2.4 GHz (20 MHz Channel)</b>					
802.11b, Single Stream, STBC	1 Mbps	CCK	0.8	29	-100
802.11g, Single Stream, STBC	6 Mbps	BPSK	5.5	29	-98
802.11g, Single Stream, STBC	24 Mbps	16 QAM	18	29	-90
802.11g, Single Stream, STBC	36 Mbps	16 QAM	24	27	-87
802.11g, Single Stream, STBC	48 Mbps	64 QAM	31	26	-84
802.11g, Single Stream, STBC	54 Mbps	64 QAM	32	26	-82
802.11n, HT20, 3 Streams	MCS16	BPSK	18	29	-92
802.11n, HT20, 3 Streams	MCS18	QPSK	54	29	-86
802.11n, HT20, 3 Streams	MCS20	16QAM	108	27	-79
802.11n, HT20, 3 Streams	MCS22	64 QAM	162	24	-75
802.11n, HT20, 3 Streams	MCS23	64QAM	189	24	-74
<b>2.4 GHz (40 MHz Channel)</b>					
802.11n, HT40, 3 Streams	MCS16	BPSK	36	29	-87
802.11n, HT40, 3 Streams	MCS18	QPSK	108	29	-80
802.11n, HT40, 3 Streams	MCS20	16QAM	216	26	-74
802.11n, HT40, 3 Streams	MCS22	64 QAM	470	24	-70
802.11n, HT40, 3 Streams	MCS23	64QAM	486	23	-68
* It is advantageous to use the smallest Channel Bandwidth that can support the Throughput requirements. Smaller Bandwidths provide more channels to choose and help avoid interference issues. The system's SNR is higher at smaller Channel Bandwidths and Range is longer.					
** Throughput of a wireless link depends on many environmental parameters. Here the bench measurement results are shown to give an indication of the real life performance of Doodle Labs modules. These results are lower than the theoretical values published in most of the literature. They do not include distance related derating.					
Antenna Signal Strength	-50 to -90 dBm (Recommended), Absolute Maximum=+12 dBm				
Antenna port isolation for concurrent operation	Up to +10 dBm signal strength for 5 GHz signal without degrading 2.4 GHz operation Up to +5 dBm signal strength for 2.4 GHz signal without degrading 5.x GHz operation				
Integrated Antenna Port Protection	>12 KV (Human Body Model) for Outdoor and Rugged models (ACO/ACM-DB-3 and NO/NM-DB-3)				
Receiver LNA Gain	>12 dB				
Receiver Adjacent Channel Rejection (ACR)	>28 dB @ 6 Mbps, 13 dB @ 54 Mbps, 3 dB @ VHT80, MCS9				
Receiver Next to Adjacent Channel Rejection (ALCR)	>40 dB				
Receive chain Noise Figure	+5 dB				
Transmitter Adjacent Channel Leakage power Ratio (ACLR)	Min 45 dB (Fc ± ChBW)				

Transmitter Spurious Emission Suppression	-40 dBc (Minimum)
RF Power control by Driver	In 0.5 dBm steps. Accuracy of power calibration $\pm 2$ dBm
RF Hardware Disable	Pin 20 of miniPCI-E interface. (Required for FAA compliance)
Control for External Power Amp	Available as an optional configuration
Spectral Analysis	8 bit resolution spectral FFTs available for software analysis
<b>PHYSICAL, ENVIRONMENTAL AND OTHER SPECIFICATIONS</b>	
Antenna Ports	3 Ports (50 Ohms) with MMCX connectors. Optional configuration with U.FL connectors available on request
Host Interface	miniPCI-Express 1.2 Standard
Host CPU Board	Any CPU board with Industry standard miniPCI-Express interface with minimum 6 mm connector height
Operating Voltage	3.3 Volts from miniPCI-Express connector
Power Consumption	5W @ Max power, in continuous data transfer mode on all 3 chains 3.5W @ 25 dBm power, in continuous data transfer mode on all 3 chains 2.5W @ 20 dBm power (ETSI max), in continuous data transfer mode on all 3 chains 0.9W in continuous data receive mode 250 mW in Sleep mode
Shield case temperature range (Operating)	0°C to +60°C (Enterprise/Indoor “*E-DB-3” models) -40°C to +60°C (Outdoor “*O-DB-3” models) -40°C to +80°C (Rugged “*M-DB-3” models) The System’s thermal design should ensure that the transceiver’s case temperature is maintained within these specifications.
Humidity (Operating)	0% – 95% (Non-condensing)
Dimensions	30 x 50 x 7 mm, 14 grams (Rugged models). Mechanical drawing and 3D-CAD files available upon request
Regulatory Requirements	Designed and Verified to meet various regulatory requirements. Formal testing and approval is required based on the Integrator’s particular host platform and antenna type. The Integrator is also responsible for obtaining all required regulatory approvals in target markets for the finished product.
FCC ID	2AG87ACM-DB-2M-R2
CE/ETSI	11ac models in AP and Client modes with full DFS – in conformity with all the requirements of the European Directive 1999/5/EC – EN 301 893 V1.8.1, EN 300 328 V.1.8.1, EN 301 489-1 V1.9.2, EN 301 489-17 V2.2.1, EN 60950-1:2006 + A11:2009 + A1:2010 + A12:2011+ A2:2013
Industry Canada (IC)	21411-ACMDB2MR2
RoHS/WEEE Compliance	Yes. 100% Recyclable/Biodegradable packaging

## FCC Statement

FCC standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247 and FCC CFR Title 47 Part 15 Subpart E Section 15.407

External antenna with gain 2.4G Wifi: 7dBi, 5G Wifi: 5dBi

FCC Regulatory Compliance:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and

(2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

-- Reorient or relocate the receiving antenna.

-- Increase the separation between the equipment and receiver.

-- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

-- Consult the dealer or an experienced radio/TV technician for help.

Warning: changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

If power exceeds the limit and the distance(Over 20cm distance in actual use between the device and user) is compliance with the requirement

RF Exposure Compliance:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator and any part of your body.

Notice to OEM integrator

If the FCC ID is not visible when the module is installed inside another device, then the outside of the device into which the module is installed must also display a label referring to the enclosed module. The end product shall have the words "Contains Transmitter Module FCC ID: 2AG87ACM-DB-2M-R2".

The device must be professionally installed.

The intended use is generally not for the general public. It is generally for industry/commercial use.

The connector is within the transmitter enclosure and can only be accessed by disassembly of the transmitter that is not normally required. The user has no access to the connector.

Installation must be controlled. Installation requires special training.

Any company of the host device which installs this modular with unlimited modular approval should perform the test of radiated & conducted emission and spurious emission, etc. according to FCC part 15C: 15.247 and 15.209 & 15.207, 15B Class B requirement, only if the tests result comply with FCC part 15C: 15.247 and 15.209 & 15.207, 15B Class B requirement, then the host can be sole legally.

When the module is installed inside another device, the user manual of the host contain below

1) This device may not cause harmful interference.

2) This device must accept any interference received, including interference that may cause undesired operation

## IC statement

RSS-Gen Issue 5, RSS-247 Issue 2

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt

RSS(s). Operation is subject to the following two conditions:

(1) This device may not cause interference.

(2) This device must accept any interference, including interference that may cause undesired operation of the device.

The term "IC: " before the certification/registration number only signifies that the Industry Canada technical specifications were met.

This product meets the applicable Industry Canada technical specifications.

Cet appareil contient des émetteurs / récepteurs exemptés de licence conformes aux RSS (RSS) d'Innovation, Sciences et Développement économique

Canada. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit

accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique

Canada applicables aux appareils radio exempts de licence.

L'exploitation est autorisée aux deux conditions suivantes :

1) L'appareil ne doit pas produire de brouillage;

2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Please notice that if the ISED certification number is not visible when the module is installed inside another device, then the outside of the device into which

the module is installed or display a label referring to the enclosed module. This exterior label can use wording such as the following: "Contains IC: 21411-ACMDB2MR2" any similar wording that expresses the same meaning may be used.

l'appareil hôte doit porter une étiquette donnant le numéro de certification du module d'Industrie Canada, précédé des mots « Contient un module d'émission », du mot « IC: 21411-ACMDB2MR2 » ou d'une formulation similaire exprimant le même sens, comme suit

The device meets the exemption from the routine evaluation limits in section 2.5 of RSS 102 and compliance with

RSS-102 RF exposure, users can obtain Canadian information on RF exposure and compliance.

Le dispositif rencontre l'exemption des limites courantes d'évaluation dans la section 2.5 de RSS 102 et la conformité à l'exposition de RSS-102 RF, utilisateurs peut obtenir l'information canadienne sur l'exposition et la conformité de RF.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.

Cet émetteur ne doit pas être co-placé ou ne fonctionnant en même temps qu'aucune autre antenne ou émetteur.

Cet équipement devrait être installé et actionné avec une distance minimum de 20 centimètres entre le radiateur et votre corps.

B1 for indoor use only

B1 pour usage intérieur uniquement

This radio transmitter IC: 21411-ACMDB2MR2 has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

The host device will use antennas: External Antenna with gain 2.4G WiFi: 7dBi, 5G WiFi: 5dBi