


H700TD(B17BF)
17" TFT-LCD Color Monitor

17"



Hansol Electronics Inc.

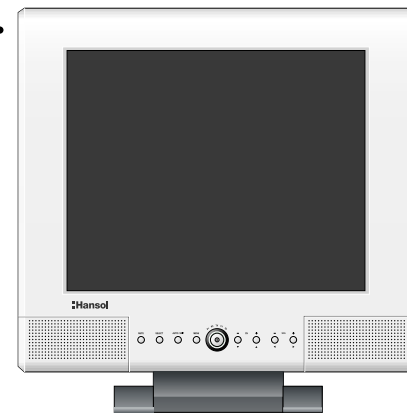

Printed on the recyclable paper
Printed in Korea
Part No. 942217020001-01

INFORMATION TO USER :

This equipment has been tested and found to comply with the limits of a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation; if this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

1. Reorient/Relocate the receiving antenna.
2. Increase the separation between the equipment and receiver.
3. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
4. Consult the dealer or an experienced radio/TV technician for help.

CAUTION

Changes or modifications not expressly approved by the manufacturer responsible for compliance could void the user's authority to operate the equipment

ENERGY STAR


As an ENERGY STAR partner, Hansol Electronics Inc. has determined that this product meets energy Star guidelines for energy efficiency.

Table of Contents

Parts	3
Connection to Signal Source	4
the range of control Angle	5
Installing Monitor Driver	6
Name and Function of Front	8
Power Management Feature	10
Adjusting OSD	11
Standard Signal Table	18
Specification	19
Troubleshooting	20
Warning	22

Good Posture Guide

- ◆ Place the monitor to face the user and then adjust the monitor angle.
- ◆ Take a break (for about 10 minutes) at every hour during the work with monitor.
- ◆ Refer to the following figure to take the correct posture.

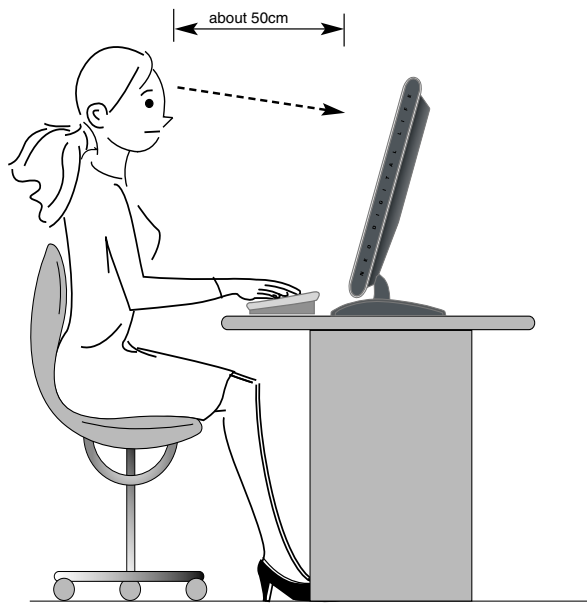


- Look down the monitor below the horizon.
- Adjust the monitor to prevent reflection.
- Relax shoulders and arms, and sit back on the chair.
- Adjust the monitor stand to acquire required angle.
- Maintain the arms horizontally and place hands softly on the keyboard.
- Keep feet flat on the ground.

Class-B Equipment


This unit is registered to Class-B Equipment (allowable electromagnetic wave) and is suitable for use in all areas including residential area.

Parts


Parts

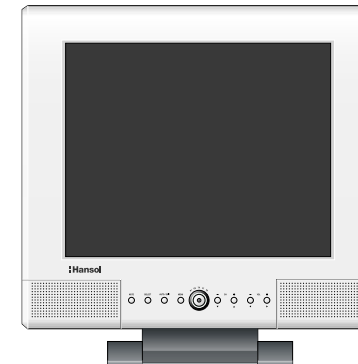

LCD Monitor




RCA Cable (Pair)



Stereo Cable



S-VHS Cable




Signal Cable



Antenna Cable




AC Power Cable




12V-DC Adapter



Remote Controller/Battery



User's Manual /
Warranty Card




CD

※ Arm and Option Stand are optional.

Connection to Computer

Basic Connection

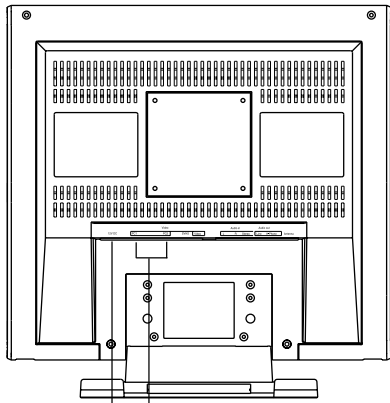

- ① 12V DC connection terminal
- ② Computer cable




▶ Use adapter.

▶ For PC



▶ For Macintosh




Adapter for Macintosh (Optional)

Refer to the table on the rear side of the optional Macintosh adapter and adjust DIP switch by the resolution of the monitor.

1. Use 220 V or 110 V. (Free Voltage)
2. Connect monitor and computer via computer cable (See figure ②)
3. Switch on power to monitor and computer.
4. Installation is finished.

Applied Connection


FULL-OPTION

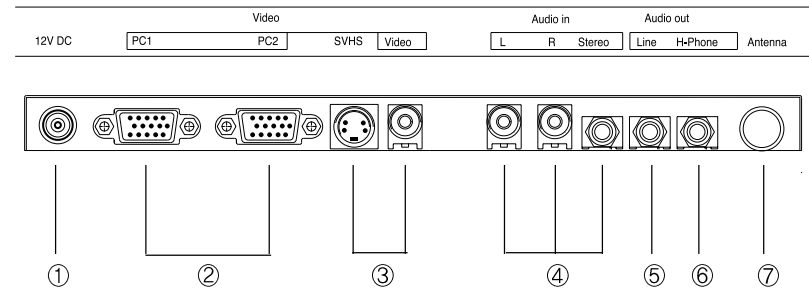


1. Connect the adapter to "12V DC" input terminal.
2. Connect the computer cable to PC1 and DVI
3. Connect video (V1) connection cable or SVHS (V2) connection cable to DVD, VCR or camcorder.
4. Connect audio output (computer, DVD, VCR or camcorder) to Audio In (L), Audio In (R) or Audio In (Stereo).
5. Connect external audio system to Audio Out (Line).
6. Connect headphone or earphone to H-Phone terminal.
7. Connect antenna or CATV connection cable to "Antenna" terminal.

How to Adjust Monitor Angle

▼ How to Default Stand

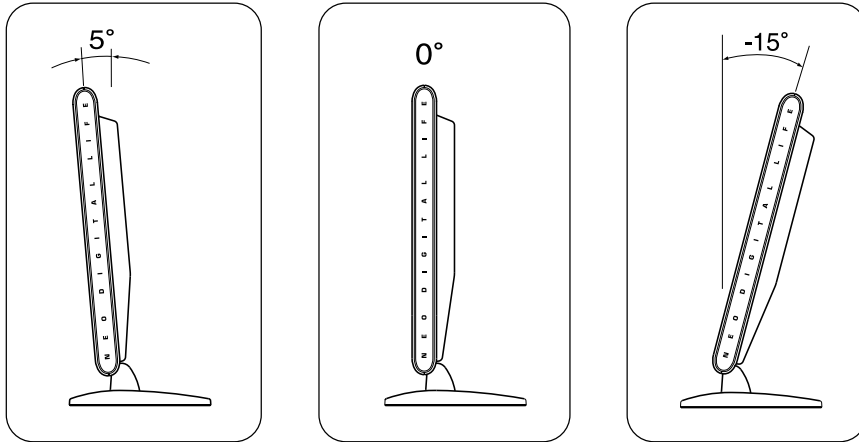

▼ How to Option Stand

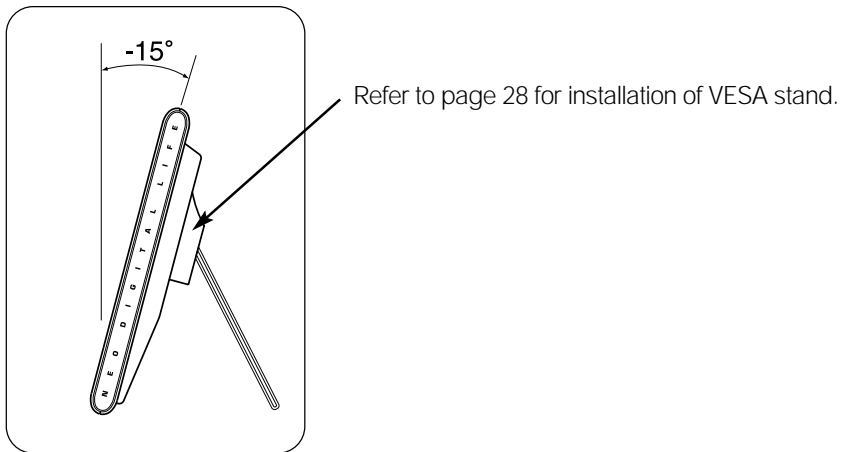

Installing Monitor Driver

Run (Click) Install at CD-ROM driver and select the product model to set the optimum display in Window 95 or 98.


- ▶ Use the Driver CD provided.
- ▶ Download the latest driver from home page of Hansol Electronics Inc. (<http://www.hansolel.co.kr>).

Automatic Installation

1. Insert the CD in the CD-ROM driver.
2. "Installation Manager" window appears.
(Or, double-click Install.exe in the CD-ROM driver folder using search function.)
3. Click "Driver Installation" icon.
4. Select the model and click "OK".
5. Select icm file of the model in the icm folder in CD-ROM driver, and then click "OK" button.
6. Click "Exit" to close the installation.

Manual Installation

1. Insert the CD in the CD-ROM driver.
2. Click 'My Computer' and follow the procedure below.

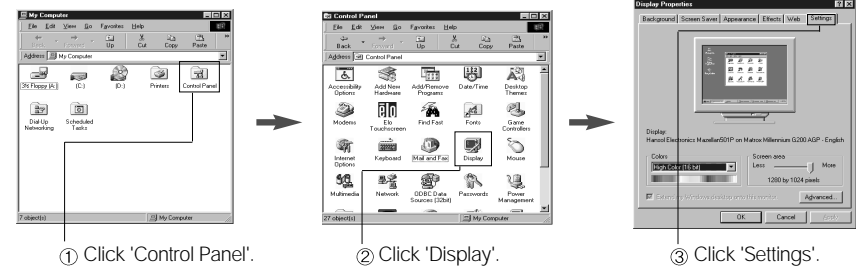







Power Management Feature

When not in use for a long period of time, the monitor automatically reduces its power consumption, meeting power saving standards of EPA and NUTEK.

The monitor is equipped with a power saving circuit that conforms to the world-standard Display Power Manager Signalling (DPMS) mode of Video Electronics Standard Association (VESA).

The power management feature requires that the video card of the computer should support DPMS function.

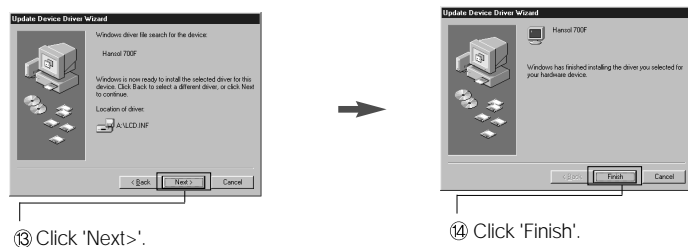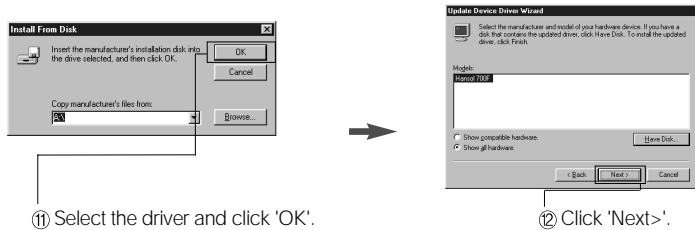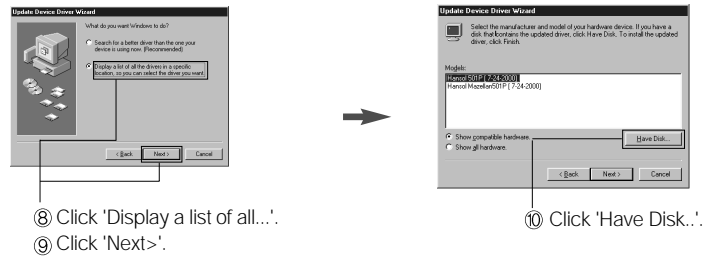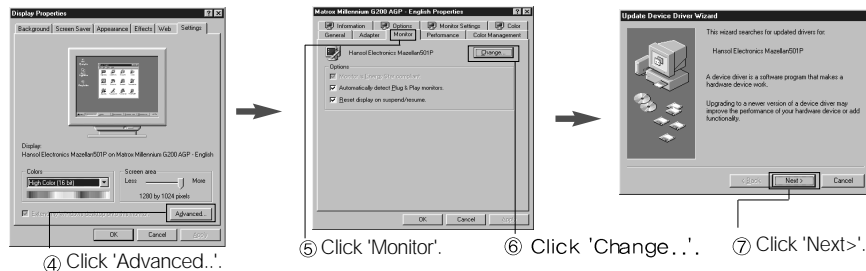

3. Select Exit if the monitor model is changed, and then reboot Windows.

Status	Color of LED	Power Consumption
Normal	Green	Normal Power
Pause	Amber/Blinking (1 second interval)	10 W or Below
Power Cut Off	Amber/Blinking (2 second interval)	5 W or Below

No image is displayed with LED blinking.

Monitor is in power saving mode.

Use mouse or keyboard to release power saving mode.

No image is displayed without LED on.

Power cable plug must be pulled out.

Check the power plugs on monitor and on the wall.