

# Connection Box

for PandarQT  
User Manual



# Contents


<b>Safety Notice.....</b>	<b>1</b>	<b>2 Maintenance .....</b>	<b>9</b>
<b>1 Introduction.....</b>	<b>4</b>	<b>Appendix I Power Supply Requirements .....</b>	<b>10</b>
1.1 Specifications .....	4	<b>Appendix II Certification Info.....</b>	<b>11</b>
1.2 Dimensions.....	5	<b>Appendix III Support and Contact .....</b>	<b>12</b>
1.3 Interface.....	6		
1.4 Connection .....	7		

# Safety Notice

PLEASE READ AND FOLLOW ALL INSTRUCTIONS CAREFULLY AND CONSULT ALL RELEVANT NATIONAL AND INTERNATIONAL SAFETY REGULATIONS FOR YOUR APPLICATION.

## ■ Caution

To avoid violating the warranty and to minimize the chances of getting electrically shocked, please do not disassemble the product. The product must not be tampered with and must not be changed in any way. There are no user-serviceable parts inside the product. For repairs and maintenance inquiries, please contact an authorized Hesai Technology service provider.

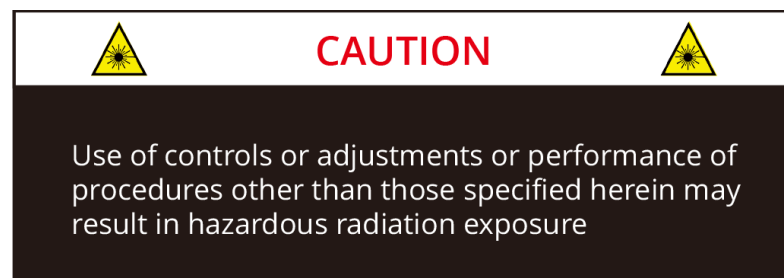

## ■ Safety Precautions

In all circumstances, if you suspect that the product malfunctions or is damaged, stop using it immediately to avoid potential hazards and injuries. Contact an authorized Hesai Technology service provider for more information on product disposal.

## Handling

Improper handling such as dropping, burning, piercing, and squeezing may cause damage to the product. In case the product is dropped, STOP using the product immediately and contact Hesai technical support.

**Repair**

DO NOT open and repair the product without direct guidance from Hesai Technology. Disassembling the product may cause degraded performance, failure in water resistance, or potential injuries to the operator.

**Power Supply**

Use only the cables and power adapters provided by Hesai Technology. Using off-spec or damaged cables or adapters, or supplying power in a humid environment can result in fire, electric shock, personal injuries, product damage, or property loss.

**Hot Surface**

During or after a period of operation, DO NOT touch the product's enclosure with your skin. Such direct contact with the hot surface can result in discomfort or even burns.

**Vibration**

Strong vibration may cause damage to the product and should be avoided. If you need the mechanical vibration and shock limits of this product, please contact Hesai technical support.

**Radio Frequency Interference**

Please observe the signs and notices on the product that prohibit or restrict the use of electronic devices. Although the product is designed, tested, and manufactured to comply with the regulations on RF radiation, the radiation from the product may still influence other electronic devices.

**Medical Device Interference**

Some components in the product can emit electromagnetic fields, which may interfere with medical devices such as cochlear implants, heart pacemakers, and defibrillators. Consult your physician and medical device manufacturers for specific information regarding your medical device(s) and whether you need to keep a safe distance from the product. If you suspect that the product is interfering with your medical device, stop using the product immediately.

**Explosive Atmosphere and Other Air Conditions**

Do not use the product in any area where potentially explosive atmospheres are present, such as high concentrations of flammable chemicals, vapors, or particulates (including particles, dust, and metal powder) in the air. Exposing the product to high concentrations of industrial chemicals, including liquefied gases that are easily vaporized (such as helium), can damage or weaken the product's function. Please observe all the signs and instructions on the product.

# 1 Introduction

This manual describes the specifications and installation of the connection box, which connects a LiDAR unit to a PC.

This connection box is an optional accessory for the PandarQT LiDAR.

This manual is under constant revision. To obtain the latest version, please visit the Download page of Hesai's official website, or contact Hesai technical support.

## 1.1 Specifications

<b>Operating Voltage</b>	DC 12 to 48 V	<b>Operating Temperature</b>	-20°C to 65°C
<b>Input Voltage (Limit)</b>	DC 9 to 55 V	<b>Supported LiDAR Models</b>	PandarQT
<b>Power Consumption</b>	< 0.5 W		
<b>Weight</b>	0.14 kg		

**NOTE** Specifications are subject to change. Please refer to the latest version.

## 1.2 Dimensions

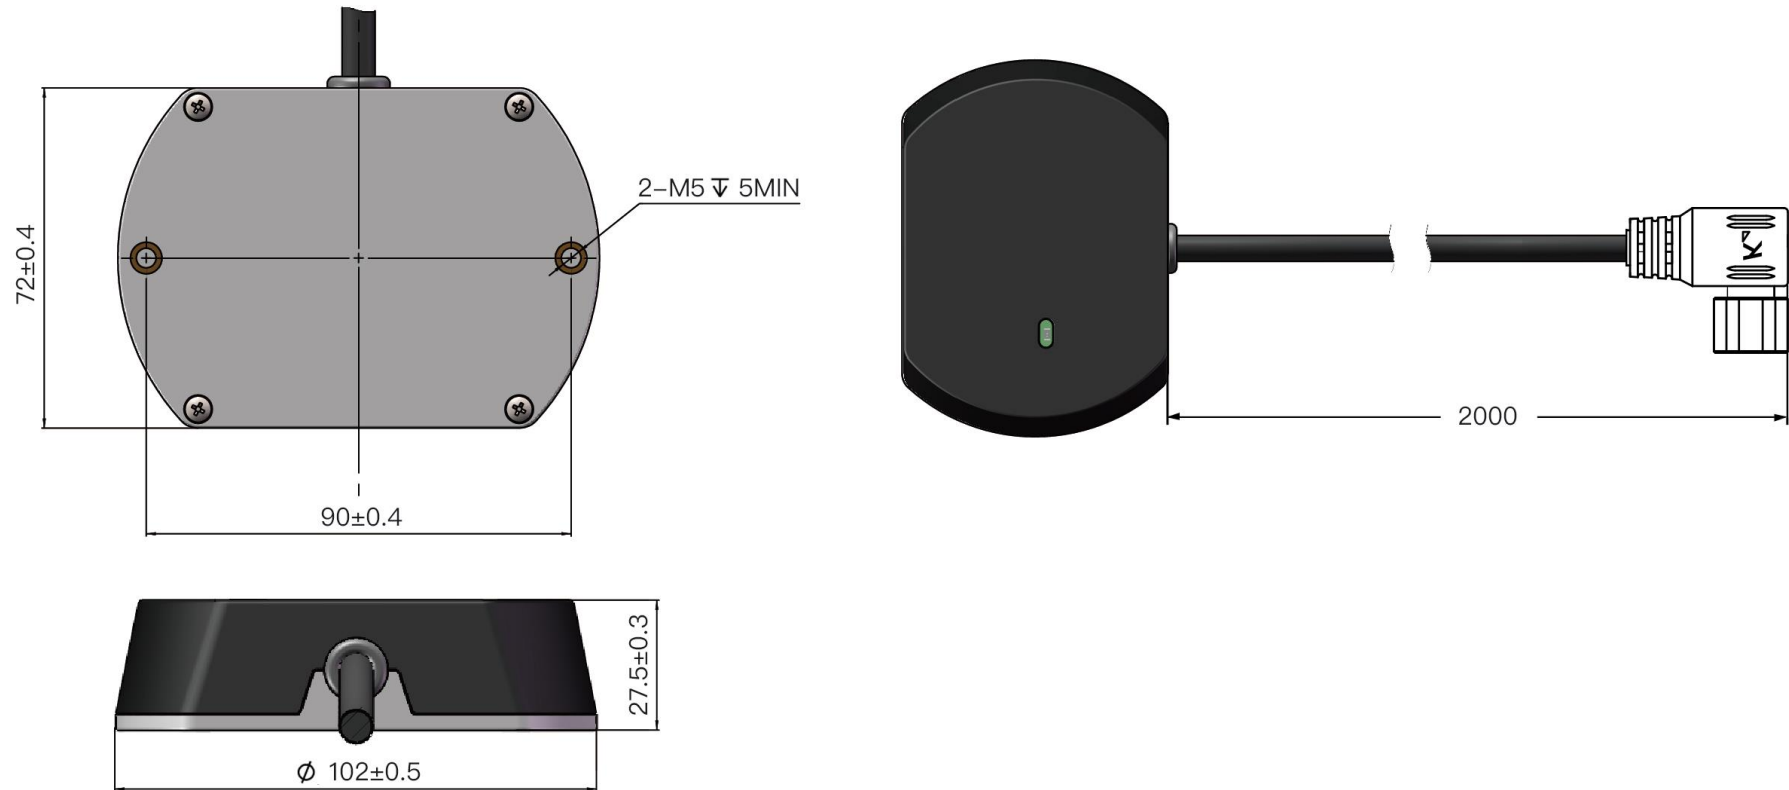


Figure 2.6 Connection Box (Unit: mm)

### 1.3 Interface

The connection box converts automotive 100BASE-T1 to 100BASE-TX typical Ethernet, as well as providing a power port.

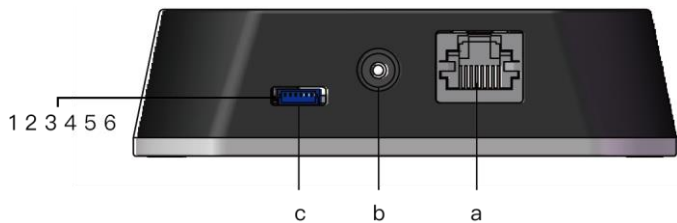


Figure 2.7 Connection Box (Front)

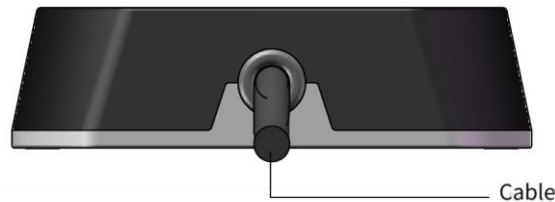


Figure 2.8 Connection Box (Back)

Port #	Port Name	Description
a	Standard Ethernet Port	RJ45, 100BASE-TX Ethernet
b	Power Port	Connects to a DC power adapter Connector part number: PJ-057AH  External power supply: <ul style="list-style-type: none"><li>• 24 W at least</li><li>• Rated input voltage: 12 to 48 V</li><li>• Allowable input voltage: 9 to 55 V</li></ul>
c	Reserved	-



## 1.4 Connection

### 1.4.1 Without PTP Clock Source

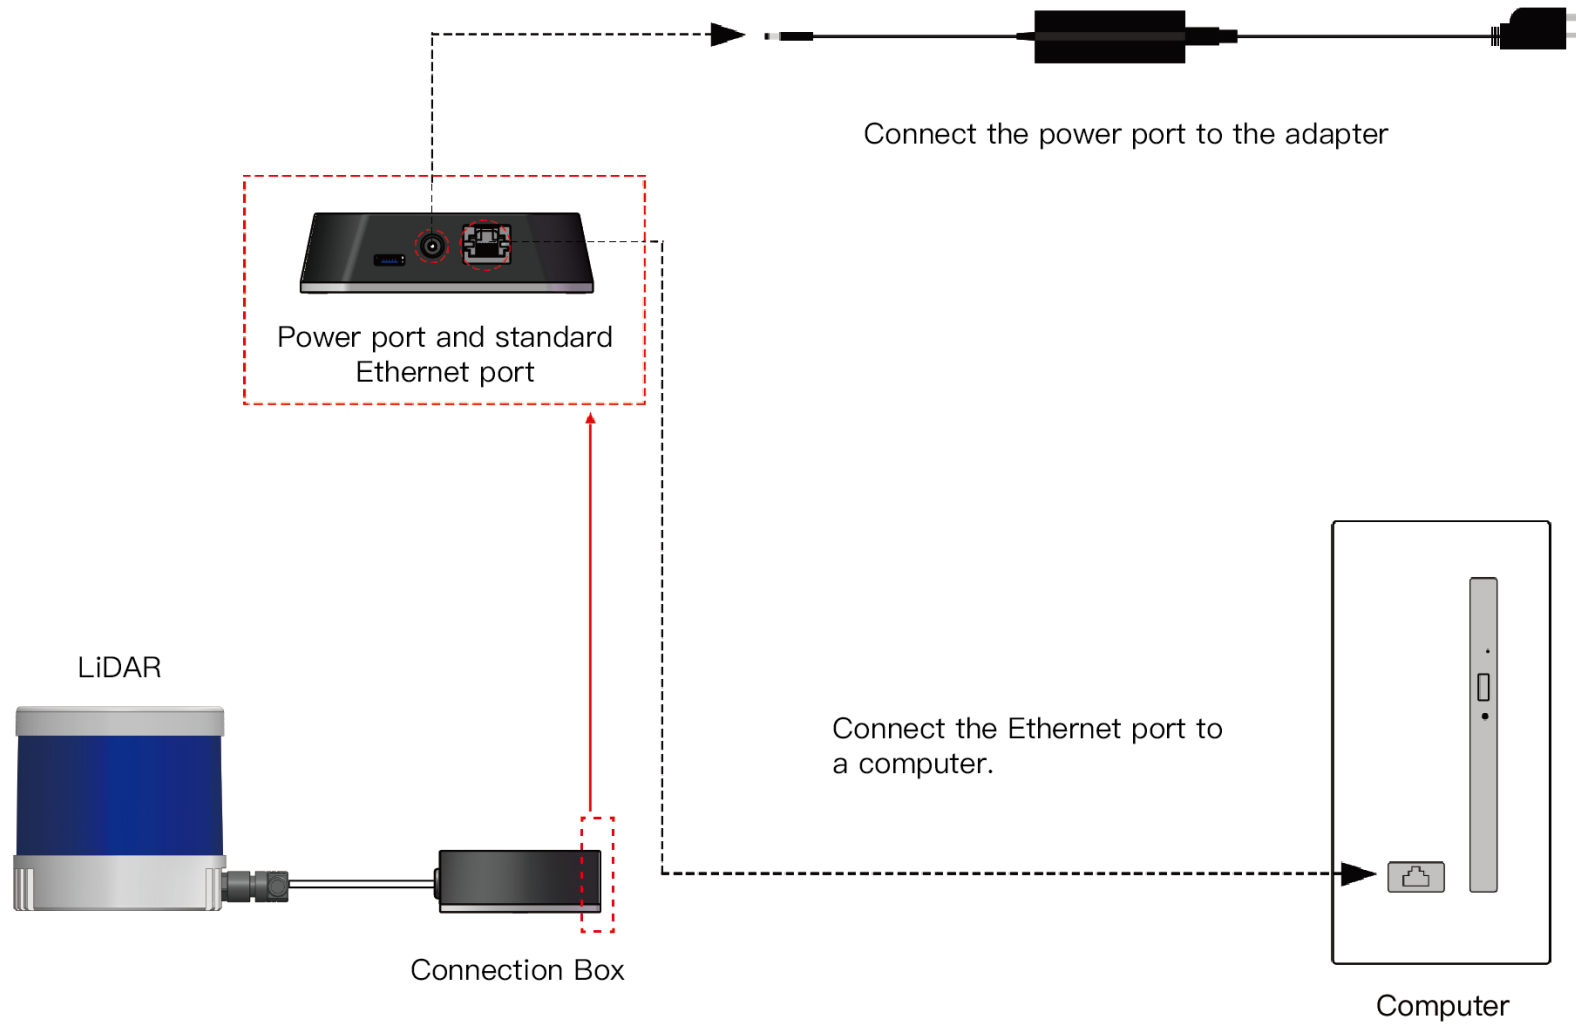


Figure 1.1 Connection Box - Connection (without PTP)

### 1.4.2 With PTP Clock Source

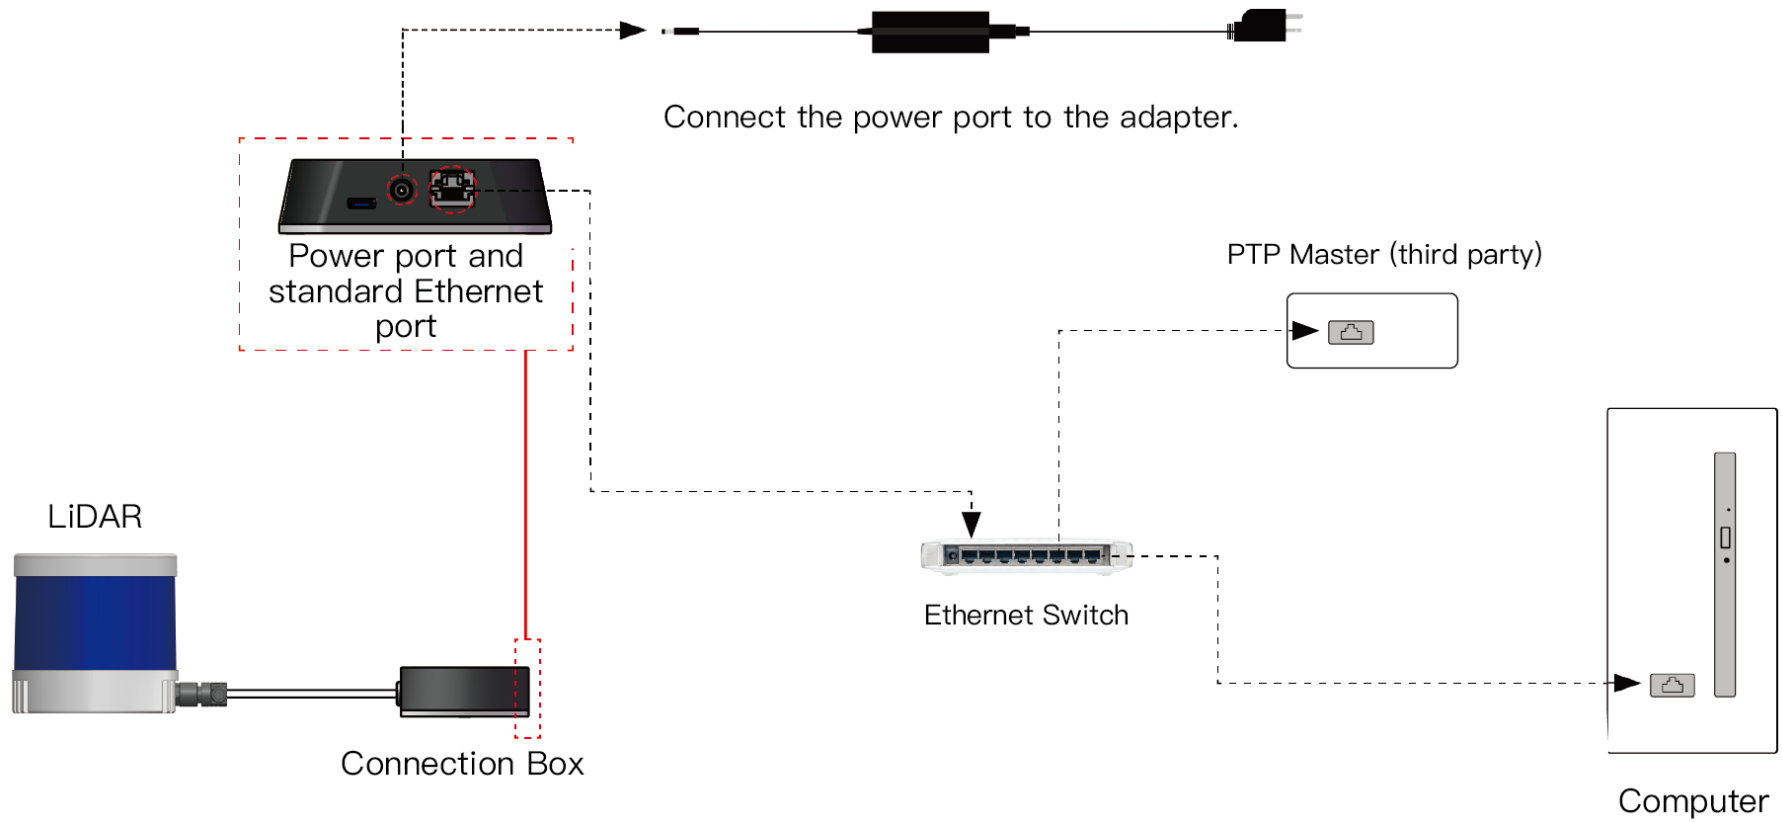


Figure 1.2 Connection Box - Connection (PTP)

## 2 Maintenance

### ■ Storage

We recommend storing the product in a dry, well ventilated place, under room temperature ( $23\pm 5^{\circ}\text{C}$ ) and a relative humidity of 30% to 70%.

### ■ Transport

Package the product in shock-proof materials to avoid damage during transport.

# Appendix I Power Supply Requirements

To ensure that the input voltage at the LiDAR's connector is within 9~55 V DC, please check the specifications of the power source and the voltage drop over cables.

The LiDAR uses 22 AWG power cables. We recommend using 22 AWG cables or cables of thicker wire gauges.

- Define the cable length from the power source to the LiDAR's connector as L (unit: m)
- When using 26 AWG (59.4  $\Omega$ /km) cables, the estimated cable resistance is  $r = 0.12L$  (unit:  $\Omega$ )
- The LiDAR's peak power consumption is below 24 W in all operating conditions
- Define the source voltage as  $U_{in}(V)$ , and the cable voltage drop during peak power consumption can be calculated as:

$$U_{drop}(V) = \frac{U_{in} - \sqrt{U_{in}^2 - 96r}}{2}$$

Users may also estimate the cable voltage drop using the following lookup table.

When cable length exceeds 10 m, source voltage should be at least 24 V.

Estimation of Cable Voltage Drop

Cable Total Length L	Source Voltage $U_{in} = 12 V$	Source Voltage $U_{in} = 24 V$	Source Voltage $U_{in} = 36 V$
2 m	0.50 V	0.24 V	0.12 V
6 m	1.67 V	0.74 V	0.36 V
10 m	3.30 V (LiDAR's input voltage < 9 V)	1.30 V	0.61 V
15 m	(LiDAR's input voltage < 9 V)	2.00 V	0.92 V

**NOTE** When the LiDAR's input voltage approaches 55 V, make sure there is no additional overshoot in the external power system. Even a short period of overvoltage can cause irreversible damage to the LiDAR.

## Appendix II Certification Info

This product is only suitable for industrial use.

### ■ FCC Declaration

FCC ID: 2ASO2CBPANDARQT

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

### Caution

The user is cautioned that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

### Note

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications.

Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

## Appendix III Support and Contact

### ■ Technical Support

If your question is not addressed in this manual, please contact us at:

[service@hesaitech.com](mailto:service@hesaitech.com)

[www.hesaitech.com](http://www.hesaitech.com)

<https://github.com/HesaiTechnology>

**NOTE** Please leave your questions under the corresponding GitHub projects.

### ■ Legal Notice

Copyright 2021 by Hesai Technology. All rights reserved. Use or reproduction of this manual in parts or its entirety without the authorization of Hesai is prohibited.

Hesai Technology makes no representations or warranties, either expressed or implied, with respect to the contents hereof and specifically disclaims any warranties, merchantability, or fitness for any particular purpose. Further, Hesai Technology reserves the right to revise this publication and to make changes from time to time in the contents hereof without obligation to notify any person of such revision or changes.

HESAI and HESAI logo are registered trademarks of Hesai Technology. All other trademarks, service marks, and company names in this manual or on Hesai's official website are properties of their respective owners.

The software included in this product contains copyright that is registered under Hesai Technology. Any third party is not permitted, except as expressly permitted by licensor or expressly required by applicable law, to decompile, reverse engineer, disassemble, modify, rent, lease, loan, distribute, sublicense, create derivative works based on the whole or any part of the software.

## Hesai Technology Co., Ltd.

Phone: +86 400 805 1233

Website: [www.hesaitech.com](http://www.hesaitech.com)

Address: Building L2, Hongqiao World Centre, Shanghai, China

Business Email: [info@hesaitech.com](mailto:info@hesaitech.com)

Service Email: [service@hesaitech.com](mailto:service@hesaitech.com)



HESAI Wechat