

USER INSTRUCTIONS AND SAFETY

Congratulations on your purchase of an N-Com product.

N-Com **B901** was made using the most advanced technologies and the best materials. Long-running tests and thorough system development have allowed the highest audio quality to be achieved.

For additional information about **B901**, and to download high-definition instructions as well as the latest Firmware version, visit the website www.n-com.it

Firmware Version: 1.0

REFERENCE STANDARDS




The products of the N-Com line are in compliance with standards as per the table below:

B901	The Bluetooth system complies with the main safety requirements and other applicable provisions of Directive 99/5/CE, Directive 2009/65/EC, Directive 2011/65/CE, Directive 2012/19/EU
-------------	--

Battery charger	Directive 2006/95, 2004/108, 2009/65/EC, 2011/65/CE, 2012/19/EU, 2009/125/CE
------------------------	--

Battery	Directive 2006/66/CE
----------------	----------------------

The Declarations of Compliance can be downloaded from the website www.n-com.it (Download section).

FCC ID: Y6MNCOM16	IC: 9455A-NCOM16	 Bluetooth®	 R-NZ	
--------------------------	-------------------------	---	--	--

The Bluetooth® word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by N-Com is under license. Other trademarks and trade names are those of their respective owners.

Model: B901 K

Contents

1. WARNINGS AND SAFETY	4
1.1.Road safety	4
1.2.Switching on the system in safe environments	4
1.3.Interferences	4
1.4.Appropriate use	4
1.5.Qualified personnel	5
1.6.Accessories and batteries	5
1.7. Disposal	5
2. CONTENT OF THE PACKAGING	6
3. INSTALLATION ON THE HELMET	7
3.1.Preliminary operations – Jet helmets or Flip-up helmets	7
3.2.Preliminary operations – Full-face helmets	7
3.3.Installing the microphone – jet helmets or flip-up helmets	9
3.4.Installing the microphone – full-face helmets	9
3.5.Installing the battery and the right-hand side speaker	10
3.6.Positioning the e-box	11
3.7.Installing the adhesive keyboard	12
4. REMOVING THE SYSTEM	14
5. BASIC FUNCTIONS	15
5.1.Volume adjustment	15
5.2.Auto On / Off function	15
5.3.N-Com EASYSET	15
6. CONFIGURATION MENU	16
7. PAIRING UP WITH MOBILE PHONES OR OTHER BLUETOOTH DEVICES	17
8. MOBILE PHONE	17
8.1.Speed dialling	17
8.2.Conference call function	18
9. MANAGING TWO MOBILE PHONES (OR BLUETOOTH DEVICES)	19
10. MUSIC VIA BLUETOOTH	19
10.1.Sharing music via Bluetooth (<i>A2DP Sharing</i>)	19
11. MUSIC VIA CABLE	20
12. SATELLITE NAVIGATOR FOR MOTORCYCLES	20
14. N-COM INTERCOM (SERIES "900")	21
14.1.Intercom pairing up	21
14.2.Intercom function (one-to-one connection)	21
14.3. <i>Smart Conference</i> (Group Intercom)	22
15. "UNIVERSAL INTERCOM" INTERCOM	23
15.1.Pairing up the UNIVERSAL INTERCOM	23
15.2.Universal Intercom Function	23
15.3.Universal Conference (chain intercom)	24
16. REMOTE control	25
17. BATTERY AND RECHARGE	26
17.1.Low battery signal	26
17.2.Charging the system	26
18. SUMMARY TABLE OF CONTROLS	27
19. LIMITED WARRANTY	29
19.1.Warranty coverage	29
19.2.Exclusions and limitations of the coverage	29
19.3.Validity of this limited warranty	30
19.4.Procedure for the forwarding of claims	30
19.5.Product identification	30
20. WARRANTY REGISTRATION FORM	31

1. WARNINGS AND SAFETY

Read this User Manual carefully, as well as the simple rules listed below. Failure to comply with these rules may lead to dangerous situations.

Caution: The product cannot be used in official or non-official competitions, motordromes, circuits, racing tracks and the like.

Caution: Installation of the N-Com **B901** system results in a weight increase of approximately 110g, which is added to the weight of the helmet and of the other accessories.

Warning: The electronic components of the N-Com system mounted inside the helmet are not waterproof. Consequently, make sure the inside of the helmet, including the comfort padding, does not get wet in order to avoid damage to the system. If it does, remove the N-Com system and the helmet comfort padding and let it air dry. Remove the battery from its housing and let it dry.

1.1. Road safety

Always obey all Traffic Regulations in force. While riding the motorcycle, your hands should always be engaged in actually riding the vehicle. Any operation to the N-Com system must be carried out with the vehicle stopped. Specifically:

- Set your cell phone on automatic answer (see the cell phone instructions to do this).
- If your cell phone is not equipped with this function, first stop your vehicle in a safe area, in compliance with Traffic Regulations and then answer the call.
- Do not make any calls while riding. Stop your vehicle in a safe place in compliance with Traffic Regulations, and then make the call.
- Adjust the volume so that it does not cause a disturbance or distraction while riding and at the same time allows you to distinctively hear background noises.
- Do not operate your cell phone or other devices connected to N-Com while riding your motorcycle.
- In all cases, obey the Traffic Regulations and remember that riding the motorcycle has absolute priority over any other manoeuvre.

1.2. Switching on the system in safe environments

When using the N-Com system, comply with all limitations and instructions related to the use of cell phones.

- Do not turn on your cell phone or the N-Com system whenever their use is forbidden or when the devices can cause interference or dangerous situations.
- Turn off while refuelling. Do not use the N-Com system in filling stations. Do not use the device near combustible materials or chemical products.
- Turn off in proximity to explosive materials.

1.3. Interferences

All phones and devices with wireless signal transmission are subject to interferences that may affect the performance of the device connected to them. These interferences are not ascribable to a defect of the N-Com system.

1.4. Appropriate use

Use the device only in the normal position, as described in the product documentation. Do not attempt to disassemble, tamper with or modify any part of the N-Com system.

Caution: Adjust the volume of the N-Com system (where provided) and of the audio sources connected to it before you use the system on the road.

Caution: Adjusting the volume to very high levels may cause damage to your hearing.

Caution: Adjust the volume of the N-Com system (where provided) and of the audio sources connected to it so as to avoid audio reproduction at high volumes. Constant exposure to high audio volumes may damage your hearing.

Caution: An incorrect installation of the system in the helmet may alter the aerodynamic and safety characteristics of the helmet itself, thus creating dangerous conditions. Install the N-Com system according to the instructions provided in the product documentation. In case of doubt, please contact your local N-Com dealer.

Warning: Listening to other equipment should not interfere with driving the vehicle, which must be the top priority at all times. Carry out all operations on the electronic equipment and on the N-Com system with the vehicle stopped, in compliance with Traffic Regulations.

1.5. Qualified personnel

Only qualified personnel can carry out technical assistance on this product. In case of any malfunction, always turn to your local dealer.

The helmet is a safety device. Tampering with it and/or with the electronic system inside the helmet, in addition to invalidating the product warranty, can also lead to dangerous situations.

1.6. Accessories and batteries

- Only use the type of batteries, battery chargers and accessories approved by Nolan for the specific model.
- The use of a battery type different from the recommended one may lead to dangerous situations and invalidate the warranty.
- Contact your local dealer to see about the availability of approved accessories.
- When disconnecting the power supply cable of any accessory or of the battery charger, always grab and pull the plug not the cable.
- Do not use batteries for purposes other than the prescribed ones.
- Never use batteries or battery chargers that turn out to be damaged.
- Do not short-circuit the battery.
- Keep the battery at a temperature between 0° / +32°C (charging); -20° / +55°C (in use).
- Danger of fire or explosion: do not throw the batteries into a fire nor expose them to high temperatures!
- Do not throw out batteries together with household refuse. The batteries should be disposed of in compliance with local regulations
- Do not wear the helmet while the battery is recharging.
- The helmet should never be left within the reach of unsupervised children in order to prevent damage to their health caused by access to the batteries.

Battery	PL053448P	3,7V – 1000 mAh
Battery charger	S-TR-009L	100/240V – 50/60 Hz 5V - 0.5 A

1.7. Disposal





Refer to this user manual and to manuals related to other parts of the N-Com system in order to disassemble the system from the helmet. Once the system has been disassembled, dispose of it according to the following instructions:



- The presence of a crossed-out wheeled bin indicates that in the European Union the product is subject to separate collection at the end of its useful life.
- Do not dispose of these products together with undifferentiated urban waste.
- The proper disposal of obsolete equipment contributes to preventing possible negative consequences on people's health and on the environment.
- For more detailed information on the disposal of obsolete equipment, contact your municipality, a waste disposal service or the store where the product was purchased.

2. CONTENT OF THE PACKAGING

The N-Com **B901** package contains:

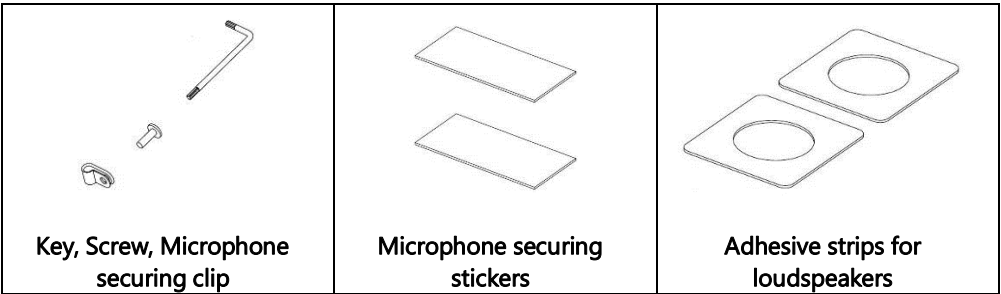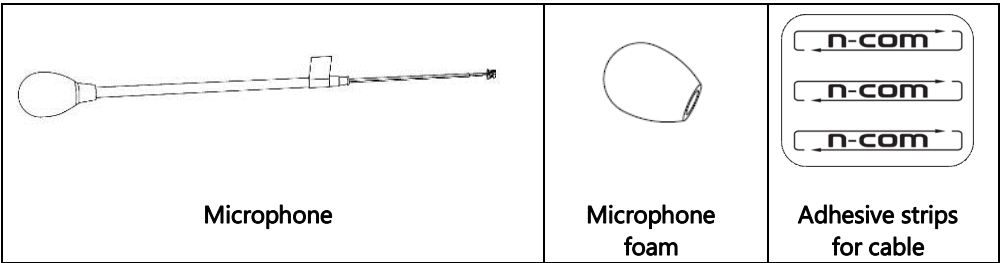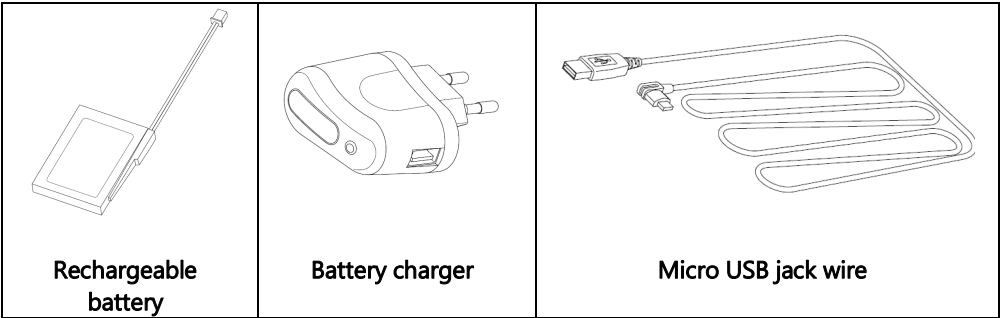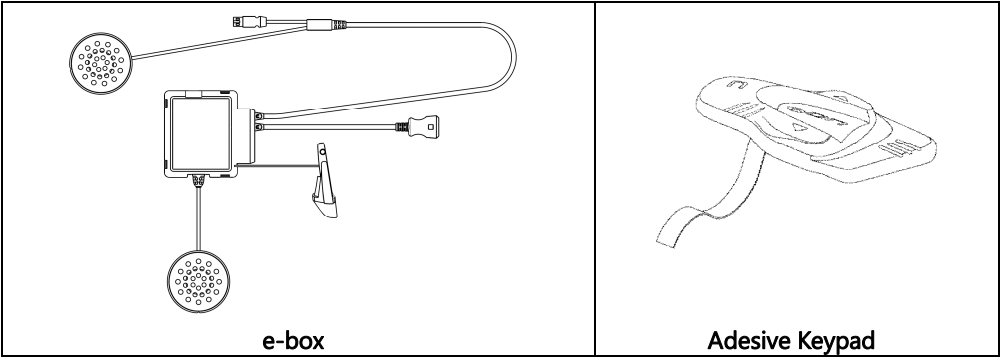

3. INSTALLATION ON THE HELMET

Important: Prior to installing the N-Com system, it is recommended to write down the identification code affixed to the product (see chapter 19.5).

You can download the installation video from www.n-com.it X-Series Download section.

3.1. Preliminary operations – Jet helmets or Flip-up helmets

- Open the helmet chin guard (only on Flip-up helmets).
- Pull out both comfort cheek pads, left and right, from the helmet. (Fig. 1)
- Remove the noise reducers from the cheek pads (if present) and cut the insert using a pair of scissors, following the pre-cut dots. Reposition the noise reducers in the removable cheek pads.
- Take out the rear section of the comfort padding, pulling on the neck roll until it is released from the shell. Reposition the padding on the outside of the helmet for the time being.
- Unhook the press-stud of the polystyrene cheek pads by pulling toward the inside of the helmet (Fig. 2), then remove the cheek pad by pulling it upward.

Warning: in case the polystyrene cheek pad is damaged during this operation, please contact your local dealer to replace it.

- Cut out the round foam insert that covers the speaker housing from the polystyrene cheek pad using a pair of scissors, following the pre-cut dots. (Fig. 3).



Fig. 1




Fig. 2




Fig. 3

3.2. Preliminary operations – Full-face helmets

- Remove both comfort cheek pads, left and right, from the helmet (see specific instructions in the helmet user manual). (Fig. 4)
- Open the visor.
- Remove the rear section of the comfort padding, pulling on the neck roll until it is released from the shell (see specific instructions in the helmet user manual). Reposition the padding on the outside of the helmet for the time being. (Fig. 5)
- Remove the chin guard by pulling on the special red tab (Fig. 6a), then remove the plug from the chin guard. (Fig. 6b)
- Gently remove the polystyrene cheek pads by pulling them upward. (Fig. 7)

Warning: In case the polystyrene cheek pad is damaged during this operation, please contact your local dealer to replace it.



Fig. 4



Fig. 5



Fig. 6a




Fig. 6b




Fig. 7

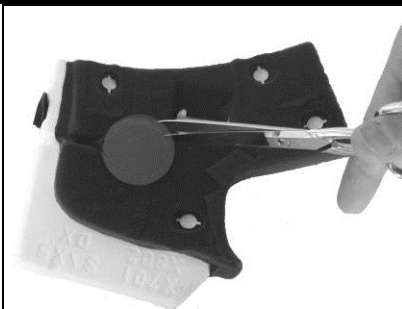


Fig. 8



Fig. 9 helmets X702GT - X701 - X603

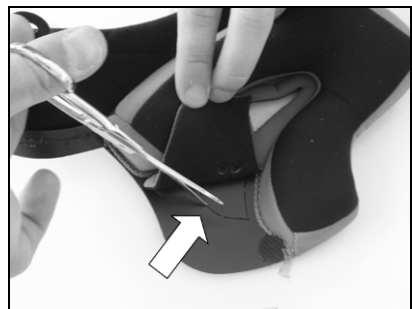


Fig. 10 helmet X702

ONLY FOR X701 – X603 - X602 HELMETS:

- Take the polystyrene cheek pads that have just been removed and, using a pair of scissors, remove the round insert by cutting the fabric securing points. (Fig. 8)
- Keep the foam used to cover the speakers housing in case you wish to use the helmet without the Bluetooth Kit system.

- In case the helmet is equipped with noise reducers on the comfort padding, lift them up.
- Take the comfort padding, left-hand and right-hand side and, if equipped, cut the pre-drilled tab as shown in fig. 9 and fig. 10.

3.3. Installing the microphone – jet helmets or flip-up helmets

- Set up the microphone by inserting the clip that holds it in place, being careful to position it correctly. (Fig. 11)

Note: The flat part of the clip has to face upward when the microphone is positioned as shown in Fig. 11.



Fig. 11




Fig. 12a

- Position the microphone on the left side of the helmet, screwing the screw into the small frame. (Fig.12 a/b) Make sure that the fluorescent band is facing the inside of the helmet.
- On certain helmets, the housing for the microphone rod must be created by cutting out the helmet border gasket along the pre-cut area. (Fig. 13)




Fig. 12b




Fig. 13

3.4. Installing the microphone – full-face helmets

- Take the polystyrene cheek pad (left-hand side) and position the microphone in its housing, as shown in fig. 14, making sure that the fluorescent band stays facing the inside of the helmet. (Fig. 15)
- Secure the microphone to the cheek pad using the "microphone securing stickers", see Fig. 14.



Fig. 14

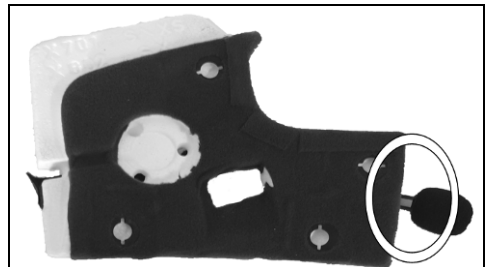


Fig. 15

3.5. Installing the battery and the right-hand side speaker

- Connect the battery to the wiring system. (Fig. 16)
- Position the battery in the right polystyrene cheek pad housing and secure it using the Velcro ribbon. (Fig. 17 / 18)




Fig. 16




Fig. 17




Fig. 18

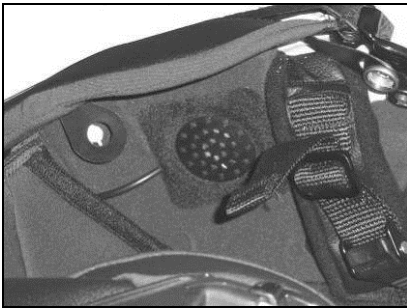


Fig. 19

- Position the right-hand side speaker in the specific cheek pad housing and secure it using the specific adhesive (Fig. 19).
- Reposition the right polystyrene cheek pad in its housing.

ONLY FOR FULL-FACE HELMETS: Insert the chin strap into the polystyrene cheek pad loop.



Fig. 20

- Arrange the battery connector behind the polystyrene cheek pad.
- Arrange the cable behind the polystyrene shell or inside the relevant housing.

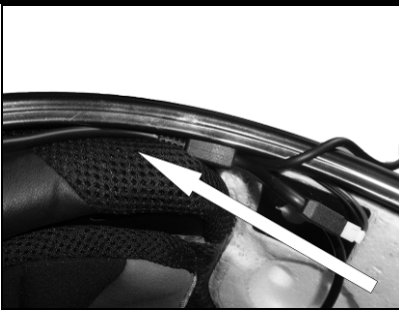


Fig. 21

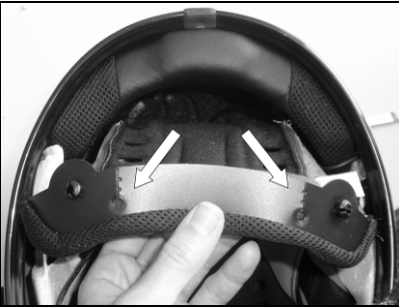


Fig. 22

ONLY FOR X702 HELMET:

- Position the battery connector and wiring underneath the shell gasket (Fig. 21).
- Cut along the pre-cut lines of the plastic tab on the back of the comfort padding (Fig. 22).
- Secure the wiring underneath the plastic tab. Close the cut parts using the cable fixing adhesives (Fig. 23).



Fig. 23

3.6. Positioning the e-box



Fig. 24



Fig. 25

- Connect the microphone to the e-box. (Fig. 24)
- Position the e-box in the left polystyrene cheek pad housing. (Fig. 25)
- Position the left-hand side speaker in the cheek pad housing and secure it using the specific adhesive. (Fig. 26)

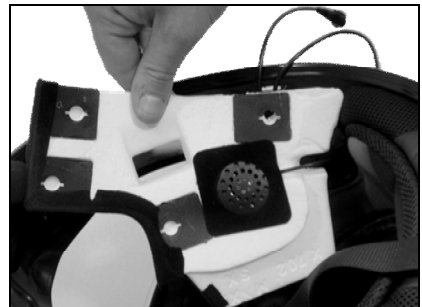


Fig. 26

N.B.: **BEFORE** replacing the left polystyrene cheek pad, follow the instructions provided in the following chapter.

3.7. Installing the adhesive keyboard



Fig. 27

- Remove the N-Com plug from the left side of the helmet; to make this easier, it is recommended to push the plug from the inside of the helmet. (Fig. 27)
- Thoroughly clean the outside surface of the shell to make sure that the adhesive keyboard sticks properly. Before you apply the keyboard, make sure that the shell area is completely clean and grease or dirt free.

ONLY FOR JET HELMETS OR FLIP-UP HELMETS: Carry out the operation with the chin guard open.

- Bring the antenna outside the helmet, passing it through the hole in the shell (Fig.28)
- Pass the Flex cable of the keyboard through the hole in the outer shell. (Fig. 29)

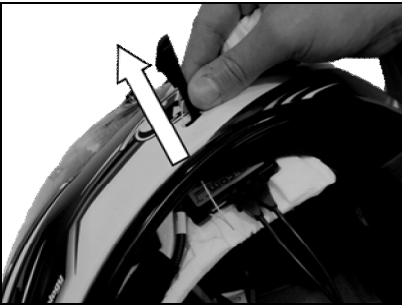


Fig. 28



Fig. 29

- Insert the antenna into the groove on the plastic support of the keypad (Fig. 30).
- Push the antenna until you hear a click (Fig. 31).



Fig. 30

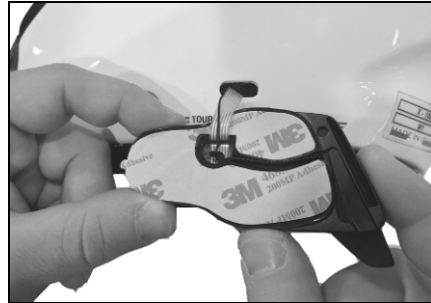


Fig. 31

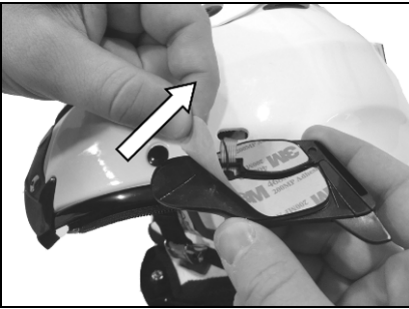


Fig. 32



Fig. 33



Fig. 34

- Remove the protective film from the back of the adhesive keyboard using the special tab. (Fig. 32)
- Pass the antenna and keypad cable completely through, inside the helmet.
- Apply the keyboard to the shell and press down on its entire surface to make sure that it sticks properly. (Fig. 33)

Note: Make sure you do not glue the antenna and keypad cable underneath the keypad support.

Note: In the event that the keyboard is not positioned correctly, peel it off right away with extreme care and repeat the positioning.

Note: It takes up to 24 hours for the keyboard to stick completely. During this time, do not expose the helmet to atmospheric agents.

- Hook up the “flex” cable of the adhesive keyboard to the e-box. (Fig. 34)
- Reposition the left polystyrene cheek pad in its housing.

ONLY FOR FULL-FACE HELMETS: Insert the chin strap into the polystyrene cheek pad loop.

- Reposition the left and right-hand side cheek pad by following the specific instructions provided in the helmet user manual.
- Hook the rear part of the comfort padding to the helmet.

ONLY FOR FULL-FACE HELMETS: Insert the chin guard (microphone side), gently placing the microphone in its housing. Then press down on the red tab until the chin guard is locked in place on the helmet.

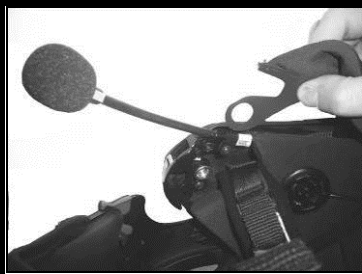


Fig. 35

ONLY FOR FLIP-UP / JET HELMETS:

- Secure the neck roll (**left side**), being careful to slide the neck roll plastic ring behind the microphone, then clicking it in the press stud. (Fig. 35)
- Secure the neck roll (right side) by hooking up the plastic ring to the press-stud.

Warning: Always verify the proper length of your chinstrap and adjust it if necessary, referring to the specific helmet instructions.

Warning: After the **B901** is installed on the helmet, make sure the microphone is properly positioned in front of your mouth, if necessary adjusting the moveable element.

Warning: The wind protector, supplied as standard equipment with helmets that can be opened, may make it more difficult to open and close the chin guard when the microphone is installed.

4. REMOVING THE SYSTEM

To remove the system from the helmet, proceed as for the installation, by removing the various parts.

Important: to remove the keypad support, proceed as follows.

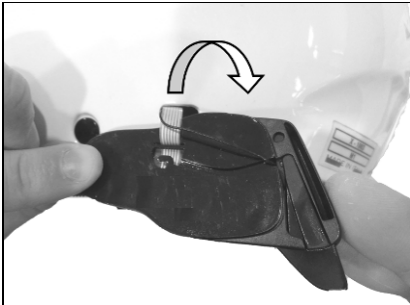


Fig. 36

- Remove the keypad support from the helmet shell (Fig. 36);
- Take out the antenna from the plastic support of the keypad (Fig. 37);
- Remove the Flex cable of the keypad from the connector found on the electronic card;
- Now completely remove the keypad support from the helmet;
- Bring the antenna inside the helmet, passing it through the hole in the helmet shell. (Fig. 38).

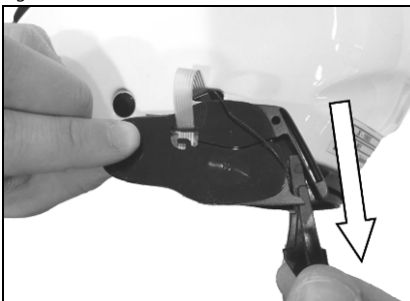


Fig. 37

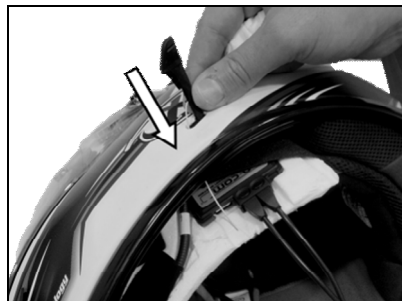


Fig. 38

The keypad support can be removed in case you decide to no longer use the system. However, it cannot be reused again as it will have lost its adhesive properties. Contact your local dealer to purchase a new keypad support that will stick properly to the helmet shell.

5. BASIC FUNCTIONS

System ON	Press " ON " and keep it pressed for about 2 seconds, until the LEDs turn on and you hear the voice announcement.
System OFF	Press " ON " and keep it pressed for about 6 seconds, until the LEDs turn off and you hear the voice announcement.

5.1. Volume adjustment

You can easily adjust the volume by tapping the "▲" button or the "▼" button. You will hear a beep when the volume reaches the maximum or minimum level.

The volume is independent for each sound source. Once it is set for a specific source (phone call, radio, Mp3), it will remain in memory even after the system is switched off.

However, if you adjust the volume during stand-by mode, it will affect volume levels of every audio source.

5.2. Auto On / Off function

If the helmet does not move for more than 60 seconds, the **B901** system goes into "deep sleep" mode. The system is completely turned on as soon as movement is detected.

If the system is in "deep sleep" mode for more than 3 days, it turns off completely. To turn it back on, the "**ON**" key needs to be pressed.

5.3. N-Com EASYSET



"N-Com EASYSET" is the application that can be used to manage and configure the **B901** system. The programme can be downloaded from the Internet site www.n-com.it, in the "Download" section. The functions that can also be managed from the N-Com EASYSET are listed here below with the specific icon.



The N-Com system can be managed from the dedicated App "N-Com EASYSET", which makes it possible to configure and control the N-Com system directly from your Smartphone.

The N-Com APP can be downloaded free of charge from Google Play or Apple Store.

For additional details, please visit the website www.n-com.it

The functions that can also be managed from the N-Com EASYSET App are listed here below with the specific icon.

6. CONFIGURATION MENU

All Bluetooth pair ups and other adjustments are carried out in this mode.

To put the system in "Configuration mode" (starting from a switched off system) press the "ON" key and keep it pressed for 4 seconds, until the blue LED starts flashing quickly and you hear the voice announcement "*Configuration*".

Once in the "Configuration" menu, press the keys "▲" and "▼" to scroll through the various menu items.

In the items marked with an "*", it is possible to enable / disable the function or carry out the commands by pressing the "ON" key to confirm.

The following items make up the "Configuration" menu:

- A. **Mobile phone pair up** (chapter 6)
- B. **Intercom pair up** (chapter 14)
- C. **Universal Intercom pair up** (chapter 15)
- D. **Second mobile phone pair up** (chapter 8)
- E. **Remote control pair up** (chapter 16)
- F. **Speed dialling*** (chapter 7.1)
- G. **Audio boost ***

By enabling the "Audio boost" (Audio Boost), all the audio sources inside the device will be reproduced at a higher and potentially less clear volume.

Press the "ON" confirmation key to enable / disable the function, which is not enabled by default on the device.
- H. **Delete all pair ups***

In order to delete all Bluetooth pair ups stored in the device, press the key "▲" or "▼" until you hear the voice announcement "*Delete all pair ups*".

Press the "ON" confirmation key to delete all Bluetooth devices stored in memory.
- I. **Reset***

In order to restore the factory settings of the device, press the key "▲" or "▼" until you hear the voice message "*Reset*".

Press the "ON" confirmation key to restore all the factory settings of the device.
- J. **Exiting the configuration***

To exit the "Configuration" menu, press the key "▲" or "▼" until you hear the voice announcement "*Exit the configuration menu*".

Press the "ON" confirmation key to exit the "Configuration" menu.

If no key is pressed within 10 seconds, the device automatically exits the "Configuration" menu.

7. PAIRING UP WITH MOBILE PHONES OR OTHER BLUETOOTH DEVICES

- Make sure the B901 is turned off;
- Put the system in the "Configuration" mode, then press the "ON" key and keep it pressed for 4 seconds until the blue LED starts flashing quickly;
- Press the key "▲" to access the "Mobile phone pair up mode".
- Turn on the search for Bluetooth devices (smartphone, MP3 reader) on the device;
- Select the N-Com device. If a password is requested, enter 0000 (four zeros);
- Connection between the two devices is established after a few seconds.

Note: The affiliation is stored in the helmet and in the cell phone and it is not lost when the two devices are turned off. As a result it needs to be carried out only once.

Automatic Connection	Once the Bluetooth device has been paired up, connection is automatic when the system is turned on.
Manual Connection	In case connection is not automatically initiated after a few seconds, you can connect from the Bluetooth device or by pressing "ON" and keep it pressed for about 2 seconds.

8. MOBILE PHONE

To pair up a mobile phone to the B901 system, follow the procedure illustrated in Chapter 6.

Answering a phone call	Briefly press any key when you hear the incoming call signal.
Vocal answer	When you hear the ringtone, say any word out loud.
Voice call	Press "ON" and keep it pressed for about 2 seconds.
Hanging up/rejecting a phone call	Press "ON" and keep it pressed for about 2 seconds.
Manual phone connection	Press "ON" and keep it pressed for about 2 seconds.

8.1. Speed dialling



Using the N-Com EASYSET program or the N-Com EASYSET App, you can store up to 3 of your favourite numbers, which you will be able to dial from the "Speed Dialling" menu.

Saving the Speed Dialling numbers

To assign one or more speed dialling numbers:

- Put the system in the "Configuration" mode: starting from a switched off system, press the "ON" key and keep it pressed for 4 seconds, until the blue LED starts flashing quickly and you hear the voice announcement "Configuration".
- Press the key "▲" or "▼" until you hear the voice command "Speed dialling".
- Press the "ON" confirmation key. You will hear the voice announcements "Speed dialling 1" and "Phone connected".
- Press the keys "▲" or "▼" to select the speed dialling number to be assigned. The saved position is confirmed by the voice announcement "Speed dialling 1 / "Speed dialling 2" / "Speed dialling 3".

- On your own mobile phone (paired up and connected to the N-Com system), call the phone number you wish to assign to the selected speed dialling position. The call is interrupted before it goes through, and the selected number will be saved; at this point you will hear the special voice announcement confirming the selection ("*Save Speed Dialling 1*" / "*Save Speed Dialling 2*" / "*Save Speed Dialling 3*").



You can also configure these setting through the program "N-Com EASYSET" or through an Android Smartphone, iPhone, iPad on which the "N-Com EASYSET" App has been installed.

Using the stored numbers

To access the "Speed Dialling" menu, press at the same time the "ON" and "N" keys ("*Speed Dialling*"), then use the keys "▲" and "▼" to scroll through the menu items.

Then press the "ON" key to confirm the selection of one of the following items:

- *Call Last Number Dialed*
- *Speed Dialling 1*
- *Speed Dialling 2*
- *Speed Dialling 3*
- *Cancel*

If you wish to exit the "Speed Dialling" menu, press the keys "▲" and "▼" until you hear the command "*Cancel*", then press "ON" to confirm.

N.B.: If no key is pressed within 15 seconds, the system exits the "Speed Dialling" menu.

8.2. Conference call function

When a call comes in on a mobile phone connected via Bluetooth to **B901**, the intercom is temporarily turned off. However, if you wish to share the phone call with the other helmet, simply turn on the intercom manually during the phone call.

Turning on the phone conference call function	During the phone call, briefly press "N" (channel 1). During the phone call, press the "N" key twice (channel 2). During the phone call, press the "N" key three times (channel 3).
Turning off the phone conference call function	During the phone call, briefly press "N".

9. MANAGING TWO MOBILE PHONES (OR BLUETOOTH DEVICES)

The **B901** system can be hooked up to two phones (or Bluetooth) devices at the same time. The second phone (secondary device) can receive calls but not make them.

To pair up the second Bluetooth phone (secondary device):

- Make sure the B901 is turned off;
- Put the system in the "Configuration" menu: press the "ON" key and keep it pressed for 4 seconds, until the blue LED starts flashing quickly;
- Press the pushbutton "▲" until you reach the option "*Pair up second mobile phone*".
- Turn on the search for Bluetooth devices (smartphone, MP3 reader) on the device;
- Select the N-Com system from the list. If a password is requested, enter the code 0000 (four zeroes);
- After a few seconds, the connection between the two devices is activated.

Once the Bluetooth device has been paired up, connection is automatic when the system is turned on.

10. MUSIC VIA BLUETOOTH

To pair up an Mp3 device to the B901 system, follow the procedure illustrated in Chapter 6.

Play music (Play)	Briefly press "ON".
Pause function (Pause)	When the player is connected and playing music, briefly press "ON".
Next track (Skip)	When the player is playing music, press "▲" for 2 about seconds.
Previous track (Rew)	When the player is playing music, press "▼" for 2 about seconds.

10.1. Sharing music via Bluetooth (*A2DP Sharing*)

During the intercom connection, you can start playing music by briefly pressing the "ON" key. The music will be played in both systems.

Music sharing temporarily cuts off the intercom conversation; however, this can be automatically restored by stopping the music (this is done by briefly pressing the "ON" key).

N.B.: Music shared through the intercom can be managed by both systems, for example, both systems can change the track by pressing the relative command.

11. MUSIC VIA CABLE

Connect the mini USB connector of the Multimedia Wire (not included) to the helmet and the other end to the audio device. A coloured band on the cable indicates the connector to be hooked up to the audio device.

Turning on the cable audio	Press the "ON" key three times.
Turning off the cable audio	Press the "ON" key three times.

12. SATELLITE NAVIGATOR FOR MOTORCYCLES

B901 system is compatible with the most common satellite navigators for motorcycles. For a list of compatible models and additional details, visit the website www.n-com.it

To pair up a satellite navigator to the **B901** system, follow the procedure illustrated in Chapter 6.

N.B.: Intercom connection is automatically cut off every time the navigator gives directions and restored at the end of the message from the navigator.

14. N-COM INTERCOM (SERIES "900")

The N-Com B901 system allows communication with other N-Com systems, up to a distance of about **700 m** (in open field, with no obstacles).

Important: The procedure described below refers exclusively to the pairing up and operation between the B901 and the "900" series N-Com systems.

To pair up to N-Com systems of a range other than the "900" series, please refer to the procedure described in chapter 14 "Universal Intercom".

N.B.: The range and quality of the communication may vary significantly depending on the presence of obstacles, weather conditions, magnetic fields.

N.B.: The range of the communication varies depending on the N-Com systems used.

14.1. Intercom pairing up

- Make sure the B901 is turned off;
- Put the systems in "Configuration" mode: press the "ON" key and keep it pressed for 4 seconds, until the blue LED starts flashing;
- On both systems, press the key "▲" until you reach the option "*Intercom pair up*";
- On system A, press the key pertaining to the "pre-setting position" where you wish to save system B.

Pairing up CHANNEL 1	Briefly press "N".
Pairing up CHANNEL 2	Press the "N" key twice.
Pairing up CHANNEL 3	Press the "N" key three times.

The Intercom connection with the selected channel is automatically activated at the end of the pair up procedure.

14.2. Intercom function (one-to-one connection)

To establish an Intercom connection with one of the systems stored in memory, simply press the command related to the channel where the system was saved.

Connection CHANNEL 1	Briefly press "N".
Call CHANNEL 2	Press the "N" key twice.
Call CHANNEL 3	Press the "N" key three times.
Disconnection of active intercom	Briefly press "N".

The B901 system is equipped with the VOX function, which makes it possible to switch the intercom on and off vocally. Once the intercom is manually activated for the first time, the B6L system detects your voice and automatically activates/deactivates the communication.



You can enable / disable the "VOX" function and set the activation sensitivity, using the N-Com EASYSET program or the N-Com EASYSET APP.

The VOX function is disabled by default on the device.

N.B.: In case the pre-setting position is empty, or the system being called cannot be reached within the maximum range or it is already engaged in a phone call, you will hear an error voice message.

N.B.: In case the Intercom connection system falls outside the range (Intercom connection interrupted), the B901 system will automatically try to reconnect every 8 seconds. Double beeps will be emitted until the Intercom connection is not restored.


If you do not want automatic reconnection, press the "ON" key to stop the automatic reconnection attempts.

14.3. Smart Conference (Group Intercom)

Thanks to the "Smart Conference" function, you can start the conference communication between N-Com intercom systems of the "900" series previously paired up and saved in the 3 available channels. All systems must be turned on and available within the connection range.


1. Each system must have been previously paired up to all the other systems: B, C and D.

←-----→ AFFILIAZIONE

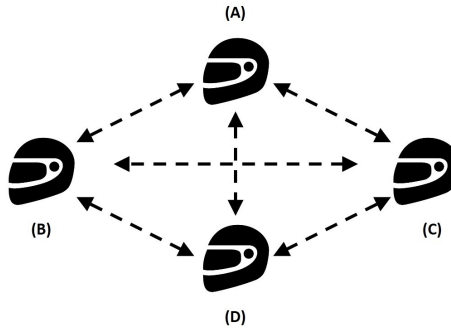

2. Any system can press the "N" key for 2 seconds to activate the Group Conference or to start a conference communication between all the systems.

←-----→ CONNESSIONE

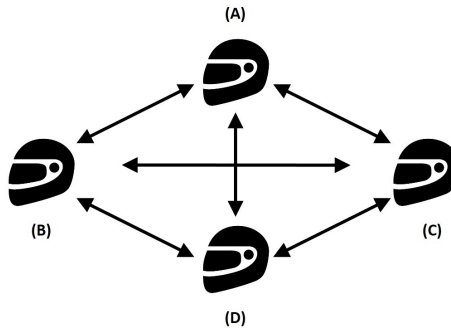

3. In the case where one of the systems presses the “N” key or falls outside the connection range, the group intercom is interrupted.

Smart Conference connection	Press the “N” key for 2 seconds. Activation is confirmed by a beep in the helmet and by the voice message “ <i>Group Intercom</i> ”.
Smart Conference disconnection	Briefly press the “N” key. Disconnection is confirmed by the voice announcement “ <i>Group Intercom ended</i> ”.

N.B.: During a “Smart Conference” call, connection to the mobile phones of all participants is temporarily cut off. When the conference call ends, all phones automatically reconnect to their own intercom system.

15. “UNIVERSAL INTERCOM” INTERCOM

The N-Com B901 system can be connected via Bluetooth to intercom systems of other brands or to N-Com systems other than the “900” series, thanks to the UNIVERSAL INTERCOM function.

Important: N-Com systems other than the “900” series must be paired up to the N-Com B901 by following the procedure “*Pairing up the Universal Intercom*”.

Caution: Visit the www.n-com.it website for the list of compatible N-Com systems.

15.1. Pairing up the UNIVERSAL INTERCOM

The N-Com system can be paired up to the other intercom (from now on referred to as Intercom B) as if it was a mobile phone.

1. Make sure the B901 is turned off;
2. Put the system in the “Configuration” mode: press the “ON” key and keep it pressed for 4 seconds, until the blue LED starts flashing;
3. Press the pushbutton “▲” until you reach the option “*Universal intercom pair up*” mode.
4. Put intercom B in the mobile phone pairing up mode (refer to the Intercom B manual);
5. After a few seconds, Intercom B will emit the “phone connection” confirmation beep;

N.B.: The system paired up using the UNIVERSAL INTERCOM is saved in the first available channel.

15.2. Universal Intercom Function

To turn on and off the audio between two helmets, proceed as follows:

From the N-Com B901 system:

Connect or disconnect Intercom B as you would for a regular N-Com intercom (chapter 14). Intercom B may receive a dialing one that must be answered with a phone reply command.

From intercom B

Press the “Voice call / Dial last number called” command.

To disconnect the intercom, press “Voice call / Dial last number called” once again.

N.B.:

- The N-Com B901 systems keeps an active connection with a mobile phone even during Bluetooth communication with other intercom systems.
- The intercom system connected to N-Com B901 may not allow simultaneous connection to a mobile phone.
- Only one system paired up in Universal Intercom mode can be stored.

15.3. Universal Conference (chain intercom)


The "Universal Conference" mode can be used to connect in conference call N-Com systems of the "900" series and one system paired up in Universal Intercom mode.

N.B.: This mode can also be used by connecting only N-Com "900" series systems, in alternative to the "Smart Conference" mode (chapter 14.3).

The connection procedure is outlined in the diagram provided here below:


1. System A must have been paired up beforehand to two B systems (Universal Intercom pair up) and C.

←-----→ AFFILIAZIONE

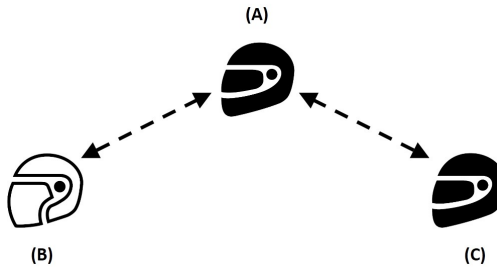


2. System A has to initiate the first intercom connection with system B (Universal Intercom), by pressing the relative intercom connection command.

←-----→ AFFILIAZIONE
 ←-----→ CONNESSIONE

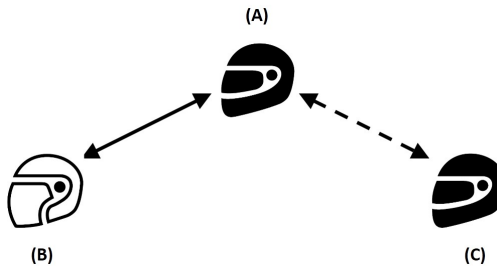

3. At this point, system C can join the intercom conference call, establishing an intercom connection with system A.

← CONNESSIONE →

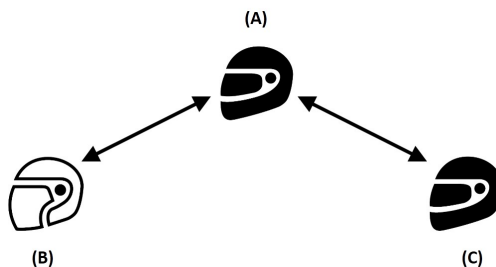

4. The three systems are not in intercom conference call mode and can talk to each other at the same time. All intercom conference call systems can be disconnected by briefly pressing the "N" command on any one of the devices connected in conference call.
5. In case you wish to add another system (D), the latter must be paired up beforehand to system C. Press the relative connection command to start a 4-participant intercom conference call.

N.B.: The "Universal Conference" mode (chapter 14.3) **CANNOT** be used with systems paired up in Universal Intercom mode.

16. REMOTE CONTROL

The B901 device can be controlled through a remote control (sold separately), thus avoiding the need to take your hands off the handlebars to use the keyboard.


Please refer to the specific operating instructions of the Remote Control in order to use its various functions.

17. BATTERY AND RECHARGE

17.1. Low battery signal

During its operation, the system alerts the user with a voice message when the battery is low. From the first message, the system has a 1-hour autonomy. Warning is given every 10 minute.

17.2. Charging the system

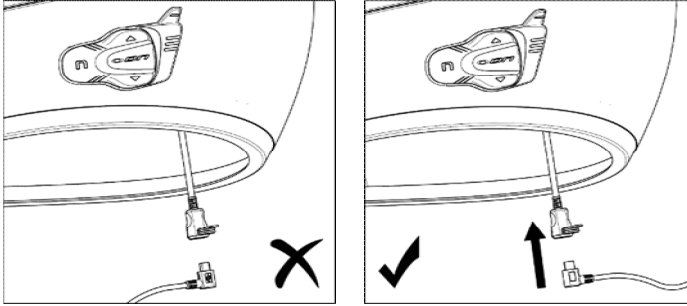

To charge the system, hook it up to the battery charger or to a USB outlet powered with the USB-mini USB cable supplied as standard equipment.

The charge will take place as follows:

B901 system turned off	When the B901 system is connected to the battery charger, the blue LED starts to flash quickly. When the battery is charged, the blue LED becomes steady.
B901 system turned on	When the B901 system is connected to the battery charger, the blue LED starts to flash quickly. When the battery is charged, the blue LED goes back to its standard flashing.

N.B.: If the device has not been charged for a long time (a few months), it may not be possible to turn on the system during the first few minutes of the charging, as the voltage may drop below the minimum limit.

18. SUMMARY TABLE OF CONTROLS

		<i>Button</i>	N	ON	▲	▼	▲ + ▼
Basic Functions	Turning on			2 sec			
	Turning off			6 sec			
	Increase Volume				X		
	Decrease Volume					X	

Bluetooth Devices	Answer phone call*	X	X	X	X		
	Voice call		2 sec				
	Speed Dialling Menu**	X	X				
	Hang up/reject a phone call		2 sec				
	Manual Device Connection		2 sec				
	Phone Conference Activation CHANNEL 1	X					
	Phone Conference Activation CHANNEL 2	x2					
	Phone Conference Activation CHANNEL 3	x3					
	Turning off the Conference function	X					

Bluetooth Music / Cable	Play music (Play)		X				
	Pause Function (Pause)		X				
	Next track (Forward)			2 sec			
	Previous track (REW)				2 sec		
	Share A2DP music		X				
	Activate audio via cable		x3				
	Deactivate audio via cable		x3				

<i>Button</i>		N	ON	▲	▼	▲ + ▼
N-Com Intercom (900 series)	Connection CHANNEL 1	X				
	Disconnection of active intercom	X				
	Calling CHANNEL 2	x2				
	Calling CHANNEL 3	x3				
	Group intercom connection	2 sec				
	Group intercom disconnection	X				

Radio Menu	Turning on the Radio		x2			
	Turning off the Radio		x2			
	Automatic search for new station			2 sec		
	Change station (pre-set stations)				2 sec	
	Pre-set station				4 sec	

Setting***	Pairing up mode (system turned off)		4 sec			
	Pairing up secondary mobile phone (or device)		2 sec			
	Pairing up CHANNEL 1 ("900" series)	X				
	Pairing up CHANNEL 2 ("900" series)	x2				
	Pairing up CHANNEL 3 ("900" series)	x3				
	Reset					4 sec

*Press any key on the N-Com keypad.

**Press the keys at the same time.

***All the Setting functions must be carried with the system in Setting Mode.

19. LIMITED WARRANTY

With this LIMITED WARRANTY CERTIFICATE, Nolangroup warrants this Product to be free from defects in material and workmanship at the time of its original purchase by the buyer.

We invite you to:

- - Read the cautions pertaining to safety and proper use.
- - Read the warranty terms and conditions.
- - Keep the originals sales receipt. This must be shown in case of repairs covered by warranty. In these cases, the product has to be taken back to the dealer where it was purchased.

19.1. Warranty coverage

If any defect covered by this limited warranty certificate is discovered within 2 (two) years from the purchase date shown on the tax receipt, Nolangroup shall repair or replace the defective product through its distribution network after having verified the defect. Nolangroup shall supply all the material and labor that is reasonably required to remedy the defect, except in those cases where the damage is caused by one of the items listed in the following paragraph "Exclusions and limitations of the Coverage".

19.2. Exclusions and limitations of the coverage

This warranty only covers defects in materials and manufacturing. Nolangroup shall not be considered responsible for product defects that can be attributed, either partially or in full, to any other cause, including but not limited to:

- Defects or damages resulting from using the Product in conditions that differ from the usual ones.
- Damages caused by improper use not conforming with normal operation in accordance with the product operating and maintenance instructions provided by Nolangroup.
- Negligence and normal wear of internal and external parts.
- Any damage caused by an accident;
- Any change or modification made to the helmet or to the N-Com system by the user or by third parties.
- Colour changes or damages caused by exposure to harmful chemical products.
- The use of incompatible accessories that are not part of the N-Com product range.
- Moreover, the warranty does not cover product defects caused by fortuitous events, modifications or adjustments, causes of force majeure or damages deriving from the product coming in contact with liquids.
- The internal helmet components are not and cannot be waterproof. Consequently, any improper exposure to rain, humidity, food spillages or other liquids can result in damages to the N-Com electronic devices, damages for which Nolan shall not be responsible.
- This warranty does not include those parts subject to wear and tear such as, for example, the rechargeable battery and the cables used for connection between the various N-Com systems or between the N-Com systems and other devices.
- Since Nolangroup does not supply the system on which the cell phones work, it shall not be responsible for the operation, availability, coverage, services or range pertaining to the aforementioned system.
- Whenever the product is used in conjunction with accessories or equipment not supplied by Nolangroup, Nolangroup shall not guarantee proper operation of the product/device combination, nor will it accept requests for repairs or replacements under warranty in case the product is used in such a way.
-
- Nolangroup shall not be responsible in case the product presents limited capabilities due to the operating mode of cell phones or of other accessories or equipment not supplied by Nolangroup.
- Tampering with the internal electronic card or with other parts of the N-Com system shall invalidate the warranty.
- Moreover, the defects covered by this warranty do not include all those specific and subjective situations that may come up during the active use of the helmet such as, for example, comfort problems while riding or aerodynamic noises.

Nolangroup shall not be held responsible in any case for incidental or consequential damages (including, without any limitation whatsoever, damages to one or more persons) resulting from non-fulfilment of the obligations arising from this warranty as it pertains to Nolangroup products.

19.3. Validity of this limited warranty

This warranty is valid only if the enclosed warranty form is duly and completely filled out with the following information:

- Product identification code
- Name and stamp of the authorized dealer.
- Product purchase date.
- Buyer's name and address.

Nolangroup reserves itself the right to not carry out repairs under warranty if the aforementioned information is removed or modified after the original purchase of the product from the dealer.

19.4. Procedure for the forwarding of claims

To forward a claim covered by this warranty, the buyer has to directly notify the dealer where the helmet was purchased with regards to the defect, presenting at the same time the defective product, a copy of the sales receipt and the Warranty registration form, duly filled out as instructed above.

PRIOR TO CONTACTING THE DEALER, WE RECOMMEND THAT YOU READ CAREFULLY THE USER MANUAL ENCLOSED WITH THE PRODUCT.

AFTER 2 (TWO) YEARS FROM THE DATE OF PURCHASE, THIS LIMITED WARRANTY IS VOID FOR ALL EFFECTS AND PURPOSES.

Repairs or maintenance under warranty do not extend the period of the warranty itself. Therefore, in case the product or one of its components is replaced, this does not initiate a new warranty period, as the purchase date of the original product shall be taken into account for warranty purposes.

Only for repairs or replacement of electronic components, in the event that Nolangroup proceeds to repairing or replacing the product, said product shall enjoy a warranty period equal to the residual portion of the original warranty or ninety (90) days from the repair date (the longer period being considered).

The repair or replacement can be carried out even with regenerated components with equivalent functions.

The replaced parts or components shall become property of Nolangroup.

THIS WARRANTY Voids AND REPLACES ANY OTHER WRITTEN OR VERBAL WARRANTIES PROVIDED FOR BY THE LAW THAT CAN BE DEROGATED AT THE PARTIES' WILL; SPECIFICALLY, NOLANGROUP DOES NOT GRANT SPECIFIC WARRANTS OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. IN NO CASE SHALL NOLANGROUP BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES INCLUDING BUT NOT LIMITED TO LOST PROFITS OR COMMERCIAL DAMAGES, TO THE FULL EXTENT THOSE DAMAGES CAN BE DISCLAIMED BY THE LAW.

NOLANGROUP RESERVES ITSELF THE RIGHT TO MODIFY, AT ANY TIME AND WITHOUT ADVANCE NOTICE, THE PRODUCT CHARACTERISTICS, FUNCTIONS, COMPATIBILITY AND SOFTWARE.

Some Countries do not allow the exclusion or limitation of incidental or consequential damages, or the limitation of the duration of implied warranties; as a result of this, the previous limitations and exclusions may not be applicable to you.

This warranty does not have any effect on the customer's legal rights under the national jurisdiction in force or on the consumer's rights towards the dealer sanctioned by the purchase/sale contract.


This warranty is valid throughout the European territory, and it represents the only express warranty provided by Nolangroup in relation to the sale of its own products. This warranty does not affect the rights to which the buyer is entitled and which are expressly provided for by Directive 1999/44/CE.

This warranty does not affect the consumer's rights provided for by the law, and specifically by the provisions of Legislative Decree 2 February 2002 n. 24.

19.5. Product identification

N-Com products are identified by means of a code that allows product traceability and identification.

The identification code is listed on the adhesive label applied to the B901 system and on the outside of the sales package.



20. WARRANTY REGISTRATION FORM

Product name B901

Identification code

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Buyer's Information

Name

Last name

Address

Phone

e-mail

Dealer's stamp

Date of purchase

Certification and Safety Approvals

FCC Compliance Statement

This device complies with part 15 of the FCC rules.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment on and off, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antennae
- Increase the separation between the equipment and the receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC RF Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. End users must follow the specific operating instructions for satisfying RF exposure compliance. The antenna used for this transmitter must not transmit simultaneously with any other antenna or transmitter, except in accordance with FCC multi-transmitter product procedures.

FCC Caution

Any changes or modifications to the equipment not expressly approved by the party responsible for compliance could void user's authority to operate the equipment.

Certification et homologation de sécurité

Déclaration de conformité FCC

Cet appareil est en conformité avec la partie 15 des règles de la FCC. Son fonctionnement est soumis aux deux conditions suivantes :

- (1) Cet appareil ne doit pas créer d'interférences préjudiciables et
- (2) Cet appareil doit accepter toutes les interférences reçues, y compris celles qui pourraient entraver son bon fonctionnement. Cet équipement a été testé et jugé conforme aux limites pour

un appareil numérique de classe B, conformément à la partie 15 des règles de la FCC. Ces limites sont conçues pour fournir une protection raisonnable contre les interférences nuisibles dans une installation résidentielle. Cet équipement génère et utilise de l'énergie radio fréquence et, s'il n'est pas installé et utilisé conformément

aux instructions, il peut occasionner des interférences nuisibles au niveau des communications radios. Cependant, il n'existe aucune garantie que ces interférences ne se produiront pas dans une installation particulière. Si cet équipement génère des interférences nuisibles à la réception de la radio ou de la télévision (ce qu'il est possible de déterminer en mettant l'équipement hors tension, puis sous tension), l'utilisateur est invité à suivre une ou plusieurs des mesures suivantes pour corriger le problème des interférences en prenant l'une des mesures suivantes :

- Modifier l'emplacement ou l'orientation de l'antenne de réception.
- Éloigner l'appareil du récepteur.
- Brancher l'appareil sur une prise située sur un circuit différent de celui du récepteur.
- Consulter le revendeur ou un technicien expérimenté pour obtenir de l'aide.

É noncé FCC sur l'exposition aux radiations RF

Cet équipement est conforme aux réglementations FCC d'exposition aux radiations définies pour un environnement non contrôlé. Les utilisateurs doivent respecter les instructions d'exploitation spécifiques pour répondre aux exigences de conformité sur l'exposition aux RF. L'antenne utilisée pour cet appareil ne doit pas fonctionner en même temps qu'une autre antenne ou émetteur, sauf s'il y a conformité avec les procédures FCC des produits multi-émetteurs.

Précautions FCC

Tout changement ou modification non expressément approuvé par la partie chargée de la mise en conformité peut annuler le droit de l'utilisateur à utiliser l'équipement.

Industry Canada Statement

This device complies with Industry Canada license-exempt RSS standard(s).

Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Déclaration de conformité IC (Industrie Canada)

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) Cet appareil ne doit pas créer d'interférences.
- (2) Cet appareil doit accepter toutes les interférences reçues, y compris celles qui pourraient entraver son bon fonctionnement.