

ESSENTIAL UPGRADES

Backup Kits



Tire Pressure Monitor



Car DVR



Visit Us Online!



caralarm.com

Download Manuals From
caralarm.com/support
In English & En Español



LIMITED LIFETIME WARRANTY
Visit caralarm.com to see our full warranty policy

EXCALIBUR

LEGENDARY VEHICLE SECURITY

OPERATION GUIDE

MODEL: AL-1510-EDP



2-WAY VEHICLE SECURITY



Up To
1500 ft
Of Range



AL-1510-EDP

Deluxe 2-way Alarm & Keyless Entry

December 5, 2016

Operation Guide



Temporary cover. Color cover is in a separate file.

Table Of Contents

Controller & Transmitter Overview.....	3
The 2-Way Controller.....	3
The 1-Way Transmitter.....	3
Controller & Transmitter Functions.....	3
Using The Valet Switch.....	7
Emergency Override.....	7
Valet Mode.....	7
SecureCode.....	7
Security System Features.....	8
Last Door Arming.....	8
Automatic Rearming.....	8
Pre-Warn Detection.....	8
When The System Triggers.....	8
The Status Light.....	9
Multi-Car Operation.....	10
Selecting CAR #1 or CAR #2.....	10
Controller Options.....	10
LCD Screen Icons.....	10
Changing the Vehicle Image.....	10
Setting The Clock.....	11
Changing (optional) remote start melodies.....	11
Selecting Melody & Vibrate modes.....	11
Parking Timer & Remote Start Timer.....	11
Anti-Carjacking Protection.....	12
Programming Controllers/Transmitters.....	13
Programming Features.....	13
User Programmable Features.....	14
Installer Programmable Features.....	18
Programmable Features Matrix.....	19

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Warning!

Changes or modifications made to this equipment not expressly approved by the part responsible for compliance could void the use's authority to operate the equipment

NOTE: The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

Controller & Transmitter Overview

THE 2-WAY CONTROLLER

Controller part number: 152-03G

- 1) **Antenna:** Sends commands to the system and receives confirmations for 2-way functions.
- 2) **LCD Display:** Displays all controller functions as well as the status of your system.
- 3) **Lock Button**
- 4) **Unlock Button**
- 5) **Trunk Button**
- 6) **3rd Channel / Start Button**
- 7) **Programming Button:** This is used for setting controller features.



THE 1-WAY TRANSMITTER

Transmitter part number: 1411-03

Call your dealer or visit www.caralarm.com to order replacement transmitters.

Transmitter battery replacement:

Remove the small screw from the lower back case, and separate the transmitter halves. Replace the one **CR2032** battery and reassemble the transmitter case.



Controller & Transmitter Functions

LOCK / ARM: Press and release the "LOCK" button.



- THE SIREN WILL CHIRP & THE PARKING LIGHTS WILL FLASH ONCE.
- UPON RECEIVING CONFIRMATION FROM YOUR SYSTEM, THE CONTROLLER WILL SHOW THE LOCK/ARM ICON AND BEEP ONCE

NOTE: PRESSING LOCK TWICE IN 5 SECONDS STARTS THE PARKING TIMER. THE CLOCK WILL CHANGE TO 0:00 AND START COUNTING IN MINUTES & HOURS.

(1-WAY TRANSMITTER: PRESS THE LOCK BUTTON)

Controller & Transmitter Functions (cont'd)

UNLOCK / DISARM: Press and release the “UNLOCK” button.



- THE SIREN WILL CHIRP TWICE & THE PARKING LIGHTS WILL FLASH TWICE THEN ILLUMINATE FOR 30 SECONDS.
- UPON RECEIVING CONFIRMATION FROM YOUR SYSTEM, THE CONTROLLER WILL SHOW THE UNLOCK/ DISARM ICON AND BEEP TWICE.

(1-WAY TRANSMITTER: PRESS THE UNLOCK BUTTON)

TRUNK RELEASE / CHANNEL 2: Press the “☺” button for 3 seconds.



- THE SYSTEM WILL DISARM AND THE TRUNK WILL OPEN (IF EQUIPPED).
- UPON RECEIVING CONFIRMATION FROM YOUR SYSTEM, THE CONTROLLER WILL PLAY THE TRUNK RELEASE ANIMATION AND BEEP TWICE

(1-WAY TRANSMITTER: PRESS AND HOLD THE “☺” BUTTON FOR 3 SECONDS)

3rd CHANNEL: Press and release the “☺☺” button twice within 5 seconds. (see user feature #21 for additional options)



- YOUR SYSTEM WILL ACTIVATE THE CHANNEL 3 OUTPUT. (IF EQUIPPED & PROPERLY CONFIGURED, THIS FUNCTION CAN ACTIVATE A FACTORY REMOTE START)
- UPON RECEIVING CONFIRMATION FROM YOUR SYSTEM, THE CONTROLLER WILL SHOW THE CHANNEL 3 ICON.

(1-WAY TRANSMITTER: PRESS AND RELEASE THE “☺☺” BUTTONS TWICE WITHIN 5 SECONDS)

Controller & Transmitter Functions (cont'd)

CHANNEL 4 (IF EQUIPPED): Press and hold the “LOCK” & “☹” buttons for 3 seconds.



- YOUR SYSTEM WILL ACTIVATE THE CHANNEL 4 OUTPUT.
- THERE IS NO 2-WAY CONFIRMATION FOR THIS FUNCTION.

(1-WAY TRANSMITTER: PRESS AND HOLD THE LOCK & “☹” BUTTONS FOR 3 SECONDS)

CHANNEL 5 (IF EQUIPPED): Press and hold the “UNLOCK” & “☹” buttons for 3 seconds



- YOUR SYSTEM WILL ACTIVATE THE CHANNEL 5 OUTPUT.
- THERE IS NO 2-WAY CONFIRMATION FOR THIS FUNCTION.

(1-WAY TRANSMITTER: PRESS AND HOLD THE UNLOCK & “☹” BUTTONS FOR 3 SECONDS)

PANIC: Press and hold the “LOCK” or “UNLOCK” button for 3 seconds.



- THE SIREN/HORN WILL SOUND, THE PARKING LIGHTS WILL FLASH, AND THE DOORS WILL LOCK OR UNLOCK DEPENDING WHICH BUTTON IS PRESSED.

(1-WAY TRANSMITTER: PRESS AND HOLD THE LOCK OR UNLOCK BUTTON FOR 3 SECONDS)

Controller & Transmitter Functions (cont'd)

SILENT ARM / DISARM: Press and release the “☺” button twice in 5 seconds.



- THE PARKING LIGHTS WILL FLASH, AND THE DOORS WILL LOCK/ARM OR UNLOCK/DISARM DEPENDING ON THE CURRENT SYSTEM STATUS.
 - UPON RECEIVING CONFIRMATION FROM YOUR SYSTEM, THE CONTROLLER WILL SHOW THE LOCK/ARM OR UNLOCK/DISARM ICON.
- (1-WAY TRANSMITTER: PRESS RELEASE THE "☺" BUTTON TWICE IN 5 SECONDS)*

SENSOR BYPASS: Press and release the “☺” button within 5 seconds of locking/arming the alarm system.



- THE SYSTEM WILL GIVE ONE CHIRP TO INDICATE THE SENSOR IS BYPASSED.
- UPON RECEIVING CONFIRMATION FROM YOUR SYSTEM, THE CONTROLLER WILL ALSO CHIRP ONCE & DISPLAY THE SENSOR ICON.

(1-WAY TRANSMITTER: PRESS AND RELEASE THE "☺" BUTTON WITHIN 5 SECONDS OF ARMING THE SYSTEM)

AUXILIARY FUNCTIONS 1-4:

The actual operation of these functions will vary from car to car. They are designed to operate extra vehicle functions like automatic sliding doors or motorized hatches. Aux 1-4 are virtual outputs only available on certain vehicles when this system is integrated with the vehicle's data network. Consult with your installer to find out if any of these functions are available for your vehicle. If so, confirm each operation with the controller and write each function in the blank spaces provided below.

- **Auxiliary 1 Function** (_____): To activate this function, press and release the “trunk” and “III” buttons simultaneously).
- **Auxiliary 2 Function** (_____): To activate this function, press and release the “lock” and “trunk” buttons simultaneously).
- **Auxiliary 3 Function** (_____): To activate this function, press and release the “unlock” and “III” buttons simultaneously).
- **Auxiliary 4 Function** (_____): To activate this function, press and release the “unlock” and “trunk” buttons simultaneously).

EMERGENCY OVERRIDE

If you were to lose or break your controller, you'd need to perform an emergency override to disarm the system and use your vehicle. To do so, use the following steps:

STEP 1 - Enter the vehicle (the alarm should sound)

STEP 2 - Turn the ignition key to the "ON" position

STEP 3 - Press the valet switch (located in the window-mount antenna) once

NOTE: *Enter your SecureCode at this time if programmed via user feature #1*

STEP 4 - Turn the ignition "OFF".

VALET MODE

ALARM VALET MODE, while active, completely disables all security functions.

Keyless entry is still operable. To enter valet mode, perform the following steps:

STEP 1 - Disarm the system either with the controller or by performing an emergency override (make sure not to hold the brake pedal).

STEP 2 - Press and hold the valet switch (located in the window-mount antenna) for 2 seconds. The system will chirp once and the RED status light will turn on. The controller will reflect that the system is in alarm valet mode.

SECURECODE

SecureCode allows you to customize the number of valet presses required to perform an emergency override. This is an extra layer of security that prevents anyone from overriding the alarm even if they have a key to the vehicle. SecureCode has 2 stages with the first requiring 1-9 button valet presses and the second requiring 0-9 valet button presses. This gives you 99 possible combinations. To program a custom SecureCode, please refer to user feature #1.

To perform an emergency override with SecureCode, use the following steps:

STEP 1 - With the system armed, enter the vehicle (the alarm will activate).

STEP 2 - Turn the ignition switch to the "ON" position.

STEP 3 - Within 5 seconds of step 2, press the valet switch to enter the first digit of your programmed code.

STEP 4 - After a few seconds, the siren will stop sounding and chirp once (confirming stage 1). The siren will then continue sounding.

STEP 5 - Now, within 5 seconds of step 4, press the valet switch to enter the second digit of your code. If the code is correct, the alarm will disarm.

If the code is entered incorrectly, you must turn the ignition key OFF, then back ON to try again. Additionally, if 2 failed attempts are made, the alarm will ignore any further attempts for 2 minutes.

Security System Features

LAST DOOR ARMING

This system can be configured to arm automatically when all the vehicle's doors are closed (see user feature #2). When this feature is utilized, the siren/horn will chirp once when all of the doors are closed. At that point, it will start a 30 second countdown (indicated by a fast flashing status light). After 30 seconds, the system will arm (and lock the doors if configured to do so). During the 30 second arming delay, if a point of entry is opened, the countdown will pause until all entry points are closed again. Turning ON the ignition key will cancel the last door arming sequence until the key is turned off and the doors are all closed once again.

AUTOMATIC REARMING

This automatically rearms the alarm if the system is disarmed from the remote. (see user feature #3 to enable). When disarmed by remote, the system will start a 90 second countdown (fast flashing status light) to arm the system. This is useful if the controller may accidentally disarm the system when it's kept in a purse or pocket where other items could potentially press the buttons. ENHANCED AUTO REARM allows you to cancel the countdown by pressing UNLOCK a second time within 5 seconds of the first press to disarm the alarm.

PRE-WARN DETECTION

This system's impact sensor is designed, in addition to detecting a full impact, will warn away potential violators when it detects a light impact to the vehicle. The system will respond by chirping the siren/horn 3 times and locking the doors. This is very useful when an intruder attempts to unlock the door with "slim jim" types of devices.

WHEN THE SYSTEM TRIGGERS

If the system were to be compromised while armed, it will trigger sounding the siren/horn and flashing the parking lights for 30 seconds (programmable). At this point you will also be notified on the controller as to which zone is violated (if in range of the system). When disarming the system after a trigger event, the siren/horn will chirp 4 times and the parking lights will flash 4 times instead of the standard 2 times.

LOCK ON TRIGGER: If a door is opened when the system is triggered, it will wait until the door is closed again, then lock the doors. This patented feature is useful to further deny a thief of further access to the vehicle.

STORM SAFE MODE: When the system is triggered, pressing the "UNLOCK" button will stop the alarm from sounding but will leave the doors locked. This function is useful if you have a false triggering situation due to violent weather.

ZONE VIOLATION RECALL: The system is capable of telling you which zones were triggered last. The system's status light will flash to indicate which zone was triggered. This occurs during the alarm cycle AND after disarming. The system will store the last triggered zone until the vehicle's ignition key is turned on. See "The Status Light" section of this manual for further explanation of this feature.

NUISANCE PREVENTION: If the system prewarns 5 times within 15 minutes, it will bypass the zone for the remainder of the 15 minutes before rearming the pre-warn zone. Additionally, if a full trigger zone is left open, the system will trigger a total of 3 times before bypassing the zone. Once the zone is closed again, it will re-arm that zone.

The Status Light

The status lights, located in the window-mount antenna, provide a visual indication of the system's status via RED (alarm status) lights.

SECURITY SYSTEM STATUS (RED LIGHT):

OFF: The alarm is disarmed and not performing any automatic functions.

ON CONSTANT: The alarm is in valet mode.

FLASHING SLOW: The alarm is armed and monitoring all entry points.

FLASHING FAST: One of the automatic arming features is in progress.

AUTOMATIC TRANSMITTER VERIFICATION (RED LIGHT):

Every time you turn on the ignition key, the status light will flash a number of times equal to the number of controllers/transmitters programmed to the system. This unique security feature protects you from a potential thief (valet attendant, mechanic, installer, etc.) from adding their own transmitter without your knowledge and accessing your vehicle and its contents at a later time (the perfect crime!).

ZONE VIOLATION RECALL:

If the security system is triggered, upon disarming, the RED status lights will flash a number of times to indicate exactly which zone(s), has been violated. It will store the last 2 violated circuits and continually repeat the flash pattern until the system is disarmed and the vehicle's ignition key is turned ON.

2 FLASHES: Hood trigger

3 FLASHES: Door trigger

4 FLASHES: Sensor port trigger

Multi-Car Operation

The controller can operate up to 2 different systems. When controlling 2 systems, it will receive all status updates on the currently selected vehicle profile and will receive only trigger alerts for the 2nd vehicle. You can switch from one car to the other at anytime as well as choose a unique image for each vehicle. Use the following steps to change vehicles. See below for info on changing the vehicle image.


SELECTING CAR #1 OR CAR #2

Vehicle #1: Press the "P" and "LOCK" buttons for 1 second to select Car #1. The controller will beep/vibrate once.

Vehicle #2: Press the "P" and "UNLOCK" buttons for 1 second to select Car #2. The controller will beep/vibrate twice.

Controller Options

LCD SCREEN ICONS

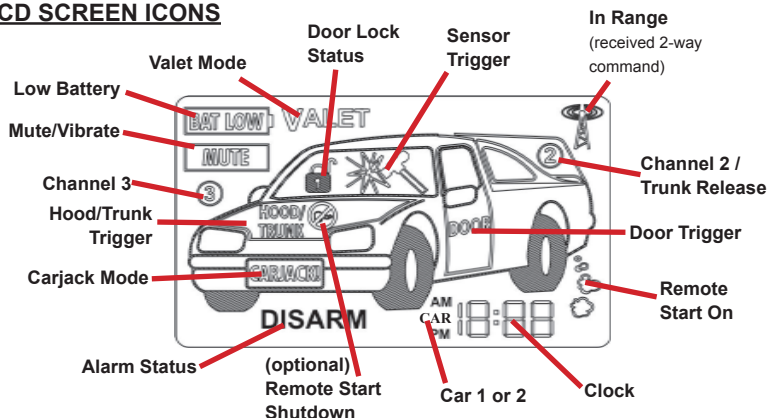

CHANGING THE VEHICLE IMAGE

Be sure to select CAR#1 or CAR#2 before beginning as you can have a different image for each profile. See above for more info.

- 1) Press the "P" button for 5 seconds to access the controller features. The controller will beep twice and the back portion of the vehicle image will flash.
- 2) Press the "◀" button to or the "▶" button to scroll to the desired image.
- 3) Wait 12 seconds to exit programming. The controller will beep once.

SETTING THE CLOCK

- 1) Press the “P” button for 5 seconds to access the controller features. The controller will beep twice.
- 2) Press and release the “P” button once to select the clock (hour digits will flash).
- 3) Press the “⦿” button to scroll up or the “⦿” button to scroll down.
- 4) Press the “P” button to switch to the minute digits.
- 5) Press the “⦿” button to scroll up or the “⦿” button to scroll down.
- 6) Wait 12 seconds to exit programming. The controller will beep once.

CHANGING (OPTIONAL) REMOTE START MELODIES

When the system is configured with an optional remote start, the controller has 5 different melodies to choose from for remote start ON and 5 melodies for remote start OFF confirmation.

- 1) Press the “P” button for 5 seconds to access the controller features. The controller will beep twice.
- 2) Press and release the “P” button 3 times to select the melody settings. The clock will change to “S 1” indicating “start melody #1” for the remote start ON melody.
- 3) Press the “⦿” button or the “⦿” button to scroll through the melodies.
- 4) Press the “P” button to switch to the remote start OFF melody selection.
- 5) Press the “⦿” button or the “⦿” button to scroll through the melodies.
- 6) Wait 12 seconds to exit programming. The controller will beep once.

SELECTING MELODY & VIBRATE MODES

Whenever 2-way alerts are received from the system, the controller can alert you with a melody, vibration, or both. By default, the controller is set for melody only.

Press the “P” and “⦿” buttons simultaneously for 2 seconds to change the setting. The “MUTE” (vibrate) icon on the status screen will turn on & off indicating your selection.

PARKING TIMER & REMOTE START TIMER

The controller has 2 convenient timer functions. The PARKING TIMER tells you how long you’ve been parked in case you are at a parking meter or other parking areas with time restrictions. The REMOTE START TIMER tells you how long your engine has been running in remote start mode.

PARKING TIMER: Press LOCK twice within 5 seconds. When the controller receives both LOCK confirmations, it will start the timer.

REMOTE START TIMER (requires an optional remote start module): This turns on every time you remote start.

Note: Pressing the “P” during either timer mode will switch between the timer and clock.

Anti-Carjacking Protection

The system has three separate Anti-Carjacking protection features (ignition, open door, or by the transmitter). All three are programmable, and must be turned on to operate. Once activated, the user has 53 seconds to cancel the Anti-Carjacking protection process by pressing the Valet Switch once. If Anti-Carjacking is not cancelled, 53 seconds after being activated the siren will begin to chirp for 7 seconds to alert the user that the system is about to enter into an alarm condition. The Valet Switch may still be pressed once during this period to cancel the Anti-Carjacking process.

If the Anti-Carjacking process is not cancelled before the 60 seconds, the system will enter an alarm condition. 30 seconds after this occurs, or should the ignition be turned off in the meantime, the siren interrupt will engage. It will not respond to the transmitter at this time, nor will the system reset. It can only be disengaged by:

Step 1 Turning the vehicle's ignition off.

Step 2 Turning the ignition back on.

Step 3 Within 5 seconds, perform an Emergency Override using the Valet Switch. If the SecureCode has been customized, the correct number of Valet Switch presses must be made.

The three types of Anti-Carjacking protection features are:

Ignition Activated Anti-Carjacking activates every time the vehicle's ignition is turned on. The Valet Switch must be pressed within 60 seconds of activating to cancel Anti-Carjacking. This is User Programmable Feature #17.

Door Anti-Carjacking activates when a door is opened after the vehicle is started and the engine is running. The Valet Switch must be pressed within 60 seconds after activation to cancel Anti-Carjacking. This is User Programmable Feature #18.

Transmitter Anti-Carjacking is activated by pressing and holding the "CH3" button (1-way transmitter: "trunk & "start") for 3 seconds, while the vehicle's ignition is on. The Valet Switch must be pressed within 60 seconds after this is done to cancel Anti-Carjacking. This is User Programmable Feature #19.

Programming Controllers/Transmitters

Standard Programming: Using this method to program additional or replacement transmitters does not turn on or otherwise affect the Unauthorized Transmitter Alert (UTA) feature. Before you begin, have all transmitters which are to operate the system at hand and make sure the correct vehicle profile (see page 12) is selected on the controller(s).

Step 1 Then, turn the ignition “on”.

Step 2 Within 5 seconds of Step 1, press the Valet Switch 5 times. The siren/horn will briefly sound, confirming that the system is ready to learn a transmitter code.

Step 3 Press the “lock” button on each transmitter one at a time. The system will chirp the siren/horn once to confirm that each was learned. If a code is not received within 10 seconds of Step 2, the learning process will automatically exit.

If the Unauthorized Transmitter Alert feature is on, programming a transmitter to the system will activate the “UTA” warning and the extended Status Light indication. For the next 48 hours, the siren/horn will sound a brief series of chirps every time the vehicle’s ignition key is turned on.

Special Programming procedure to turn on the UTA feature: Using this method to program transmitters or optional controllers, and to turn on the Unauthorized Transmitter Alert feature.

Follow the same steps as the Standard Programming, but on any transmitter/controller being programmed instead of pressing the “lock” button, press the “lock” and the “unlock” buttons together. This action turns on the Unauthorized Transmitter Alert feature and at the same time programs the transmitter or controller to operate the system.

Once the Unauthorized Transmitter Alert feature is turned on, the warning will sound for 48 hours after any transmitter programming, including the programming session which was used to turn it on. This feature can only be turned off again by sending the system back to Omega for a reset.

Programming Features

Step 1 Turn the ignition key “ON”, then “OFF”

Step 2 Within 5 seconds of step 1, press the valet switch 5 times to access user feature.

~ The siren/horn will sound and the status light will turn on.

Step 3 Within 10 seconds of step 2, press the valet switch the number of times corresponding with the desired feature’s number.

~ The siren/horn will chirp, the status lights, and the parking lights will flash equal to the selected feature.

Step 4 Change the feature by pressing the transmitter button that corresponds with the desired setting. The siren/horn will chirp to correspond with the chosen setting.

NOTE: The system will automatically exit programming mode if 10 seconds passes without any activity. Or, you can turn on the vehicle’s ignition key to exit programming.

User Programmable Features

Feature #1 - SecureCode

DEFAULT - 1 Press

SecureCode is a unique patented feature which allows you to custom select the number of Valet Switch presses in two stages, instead of a single "1 press", which would be required in order to perform an Emergency Override. If any of the three anti-car-jacking features are utilized, a customized SecureCode would also be required to turn it off once it is fully activated. The SecureCode operation is described on page 10.

To custom program a new SecureCode:

Step 1 Follow Steps 1 to 4 in the previous "Programming Features" section to access "feature #1".

Step 2 Within 10 seconds slowly press and release the controller or transmitter's "arm/lock" button the number of times equal to the desired SecureCode for stage 1, allow the system to respond to each controller/transmitter button press with a siren chirp before pressing the button again. A few seconds after the final button press, the system will chirp the horn/siren confirming the total number for stage 1.

Step 3 Configure stage 2 of the SecureCode by pressing and releasing the "disarm/unlock" button the number of times desired for the stage 2. The system will confirm as it did for stage 1.

Feature #2 - Last Door Arming

Off (press "arm/lock" button to program) - **DEFAULT**

On w/o doors locking (press "disarm/unlock" button to program)

On w/ doors locking (press "trunk" button to program)

"Last Door Arming" has the system automatically arm itself every time you exit the vehicle (the complete operation is described on page 8). This feature turns that operation on or off, and with options of having Last Door Arming operate with or without also locking the doors when the system does arm.

Feature #3 - Automatic Rearming

Off (press "arm/lock" button to program) - **DEFAULT**

On w/o doors locking (press "disarm/unlock" button to program)

On w/ doors locking (press "trunk" button to program)

"Automatic Rearming", described on page 9, rearms the alarm if accidentally disarmed. Options are to have Automatic Rearming operate with or without also locking the doors when the system does rearm.

Feature #4 - Starter Interrupt Functions

Alarm Only (press "arm/lock" button to program) - **DEFAULT**

Off (press "disarm/unlock" button to program)

Automatic (press "trunk" button to program)

Alarm Only - The Starter Interrupt is operable whenever the alarm is armed.

Automatic - This will cause the Starter Interrupt output to automatically engage 90 seconds after the ignition switch is turned "off", and after disarming the system.

Off - Completely eliminates the Starter Interrupt output,

User Programmable Features (cont'd)

Feature #5 - Ignition Activated Override

Off (press "disarm/unlock" button to program) - **DEFAULT**

On (press "arm/lock" button to program)

This feature allows an activated system to be overridden and disarmed by simply turning the ignition switch on within 10 seconds of the system's activation. After 10 seconds, the Emergency Override must be performed.

Feature #6 - Doors Lock With Ignition On

On (press "arm/lock" button to program) - **DEFAULT**

Off (press "disarm/unlock" button to program)

This feature configures the system to automatically lock the vehicle's doors every time that the ignition switch is turned on.

Feature #7 - Doors Unlock With Ignition Off

On (all doors will unlock)* (press "start" button to program) - **DEFAULT**

Off (press "arm/lock" button to program)

Driver's Door Only* (press "disarm/unlock" button to program)

All Doors Except Driver's Door* (press "trunk" button to program)

This feature controls the unlock operations when the ignition key is turned off, and it has more options because of the system's multiple unlocking outputs.

***The driver's door unlocking differently from the other doors must be configured when the system is installed!**

Feature #8 - Open Door Bypass of Ignition Locking

On (press "arm/lock" button to program) - **DEFAULT**

Off (press "disarm/unlock" button to program)

This feature cancels the automatic locking or unlocking of the vehicle's doors if one of the doors is open when the ignition switch is turned on or off.

Feature #9 - Confirmation Chirps

On (press "arm/lock" button to program) - **DEFAULT**

Off (press "disarm/unlock" button to program)

Chirps Except In Valet Mode (press "trunk" button to program)

Chirps in Valet Mode Only (press "start" button to program)

This feature removes the system's arming and disarming confirmation chirps for particular functions.

Feature #10 - Confirmation Chirp Volume

Medium High (press "trunk" button to program) - **DEFAULT**

Low (softest) (press "arm/lock" button to program)

Medium Low (press "disarm/unlock" button to program)

High (loudest) (press "start" button to program)

This feature allows the choice of four different volume levels of the system's confirmation chirps, and when programming it, the buttons can be repeatedly and sequentially pressed, thus making it easy to hear and choose the setting with the best chirp volume.

User Programmable Features (cont'd)

Feature #11 - Alarm Duration

30 Seconds (press "arm/lock" button to program) - **DEFAULT**

60 Seconds (press "disarm/unlock" button to program)

90 Seconds (press "trunk" button to program)

120 Seconds (press "start" button to program)

This feature allows four choices of the Alarm Duration, which is the period of time for which the system sounding the siren (and/or horn, optionally) and flashes the parking lights when it is triggered. **Caution: Before lengthening the Alarm Duration you should always check and determine if there are any local anti-noise or nuisance ordinances in your area, to avoid the possibility of receiving a violation citation.**

Feature #12 - Parking Light Illumination Upon Disarm

On (press "arm/lock" button to program) - **DEFAULT**

Off (press "disarm/unlock" button to program)

This feature affects the parking light operation when the system is disarmed. When this feature is turned on, the parking lights flash twice, and then turn back on for external illumination for 30 seconds unless the ignition key is turned on during that time. If this feature is turned off, the parking lights flash twice only, and do not illuminate.

Feature #13 - 2nd Channel Also Disarms System

On (press "arm/lock" button to program) - **DEFAULT**

Off (press "disarm/unlock" button to program)

"2nd channel" is most commonly used for trunk release, in which case the alarm should also disarm. This feature, turned on, configures the system to disarm when the 2nd channel is used.

Feature #14 - Arming Delay

3 Seconds (press "arm/lock" button to program) - **DEFAULT**

15 Seconds (press "disarm/unlock" button to program)

30 Seconds (press "trunk" button to program)

45 Seconds (press "start" button to program)

When the system is armed, there is a brief period of time in which an alarm trigger cannot occur. This Arming Delay allows the system to completely process its sensory parameters, which allow the vehicle to stabilize. In some cases more time is needed than the factory-set 3 seconds, and this feature offers three longer delay options.

Feature #15 - Steady Siren or Pulsed Horn

Steady Siren (press "arm/lock" button to program) - **DEFAULT**

Pulsed Horn Low (press "disarm/unlock" button to program)

Pulsed Horn Medium (press "trunk" button to program)

Pulsed Horn High (press "start" button to program)

This feature selects the operation of the primary siren output when the alarm is triggered. It can be configured for 3 pulse speeds if the output is used to honk the horn.

Feature #16 - Alarm Functions Bypass

Off (press "disarm/unlock" button to program) - **DEFAULT**

On (press "arm/lock" button to program)

This feature converts the system into a strictly Keyless Entry/Convenience System by eliminating all anti-theft alarm-oriented operations and features.

User Programmable Features (cont'd)

Feature #17 - Ignition Activated Anti-Carjacking Protection

Off (press “**disarm/unlock**” button to program) - **DEFAULT**

On (press “**arm/lock**” button to program)

This form of Anti-Carjacking is initiated by the ignition key being turned on. The Anti-Carjacking protection, and the three ways to initiate it are described on page 14.

Feature #18 - Door Activated Anti-Carjacking Protection

Off (press “**disarm/unlock**” button to program) - **DEFAULT**

On (press “**arm/lock**” button to program)

This form of Anti-Carjacking is initiated by a door being opened. The Anti-Carjacking protection, including the three ways to initiate it are described on page 14.

Feature #19 - Remote Activated Anti-Carjacking Protection

Off (press “**disarm/unlock**” button to program) - **DEFAULT**

On (press “**arm/lock**” button to program)

This form of Anti-Carjacking is initiated by activating the 3rd channel from the controller or transmitter. The Anti-Carjacking protection, including the three ways to initiate it are described on page 14.

Feature #20 - Open Door Warning Upon Arming

Off (press “**disarm/unlock**” button to program) - **DEFAULT**

On (press “**arm/lock**” button to program)

When this feature is turned on, if one of the vehicle's doors is open at the time that the system is armed via the controller or transmitter, the siren will chirp 3 times and the parking lights will flash 3 times instead of once.

Feature #21 - Button “III” function

3rd Channel (press “**arm/lock**” button to program) - **DEFAULT**

Panic (press “**disarm/unlock**” button to program)

4th Channel (press “**II**” button to program)

5th Channel (press “**III**” button to program)

This feature changes how the system responds to pressing the “**III**” button on the controllers.

Installer Programmable Features

This group of Installer Programmable Features have a direct affect upon the system's operations related to the installation and vehicle type **AND SHOULD ONLY BE CHANGED BY THE INSTALLER!!!**

Feature #22 - Doorlocking Functions

0.8 Second Outputs (press "arm/lock" button to program) - **DEFAULT**

3 Second Outputs (press "disarm/unlock" button to program)

Double Pulse Unlock Output (press "trunk" button to program)

Total Closure Lock Output (press "start" button to program)

This single feature gives the installer several needed options, to match the system's doorlocking outputs to suite different vehicle requirements. The total closure setting provides a 28 second lock pulse and a 0.8 second unlock pulse.

Feature #23 - (-) WHITE/BLACK Wire Function

OEM Arm Pulse (press "arm/lock" button to program)

Flashing Light Output (press "disarm/unlock" button to program) - **DEFAULT**

4th CH. Latching (press "trunk" button to program)

4th CH. Pulsed/On Demand (press "start" button to program)

The primary function of this wire, is to operate the vehicle's negative parking light circuit (if required) Optionally, if desired or needed, this output can be programmed for OEM arm pulse, 4th Channel latching output, or 4th Channel pulsed/on demand output.

Feature #24 - (-) BROWN/BLACK Wire Function

OEM Disarm Pulse (press "arm/lock" button to program)

Horn Honk Output (press "disarm/unlock" button to program) - **DEFAULT**

5th CH. Latching (press "trunk" button to program)

5th CH. Pulsed/On Demand (press "start" button to program)

The primary function of this wire, is to operate the vehicle's negative horn honk circuit (if desired) Optionally, if desired or needed, this output can be programmed for OEM disarm pulse, 5th Channel latching output, or 5th Channel pulsed/on demand output.

Programmable Features Matrix

User Feature Programming: Ignition on, off, press valet 5 times, press valet # of times equal to the feature #				
# Feature	Lock Button	Unlock button	Trunk button	"START" button
1 Secure Code	1, 0 (default)			
2 Last Door Arming	Off	On w/o lock	On w/ Lock	
3 Automatic Rearming	Off	On w/o lock	On w/ Lock	
4 Starter Interrupt Functions	Alarm	Off	Automatic	
5 Ignition Override	On	Off		
6 Lock w/ Ignition On	On	Off		
7 Unlock w/ Ignition Off	Off	Unlock #1	Unlock #2	Unlock #1 & #2
8 Open Door Bypass For Ign. Locks	On	Off		
9 Confirmation Chirps	On	Off	Except Valet mode	Valet Mode Only
10 Chirp Volume	Low	Med Low	Med Loud	Loud
11 Alarm Cycle	30 sec	60	90	120
12 Lights Upon Disarm	On	Off		
13 Disarm Upon Trunk Release	On	Off		
14 Arming Delay	3 sec	15	30	45
15 Siren Output	Steady	Pulse Horn Lo	Pulse Horn Med	Pulse Horn Hi
16 Alarm Functions Bypass	On	Off		
17 Ignition Anti-carjack	On	Off		
18 Door Anti-carjack	On	Off		
19 Remote Anti-carjack	On	Off		
20 Open Door Warning On Arm	On	Off		
21 "III" Button Function	3rd Channel	Panic	4th Channel	5th Channel
Installer Features				
22 Doorlock pulse	0.8 sec	3 sec	Double unlock	Total closure
23 (-) WHITE/BLACK wire Functions	OEM Arm	Parking lights	4th CH. Latching	4th CH. Pulsed
24 (-) BROWN/BLACK wire Functions	OEM Disarm	Horn Honk	5th CH. Latching	5th CH. Pulsed

Back Cover

**Color cover is in a
separate file.**