



Ring Terminal T&B Catalog Number:

RCS10-6X
78621070335
Active

UPC Number:
Status:
Description:

Heat Shrinkable Ring Terminal, Length 1.34 Inches, Width .31 Inches, Maximum Insulation .250, Bolt Hole #6, Wire Range #12-#10 AWG, Color Yellow, Copper, Tin Plated


WEB_USE

US Cutsheet PDF Catalog Link

<http://www-public.tnb.com/contractor/docs/stakon.pdf>

Features

These terminals are self-insulated. Upon completed installation, a fully sealed connection is achieved to protect the joint against the degrading effects of galvanic action, corrosion, and environmental exposure.

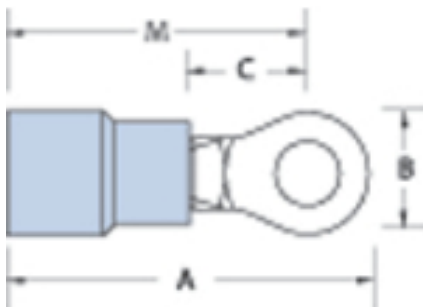

General

Insulation Type	Heat-Shrinkable Polyolefin
Terminal Series	RCS
Material	Copper
Finish	Electro -Tin Plated
Color	Yellow
Wire Range	12-10
Stud Size	#6

Dimension Information

Maximum Insulation (inches)	.250
Stock Thickness	.04
A (inches)	1.34
B (inches)	.31
C (inches)	.27
M (inches)	1.15

Specifications

Temperature Rating	105°C
Voltage Rating	600V
Flammability Rating	UL 94 V-2

Tooling

Tool Charts	Available on Website
Application Tools	WT1255
Recommended Tool	ERG4255

Packaging

T&B Order Multiple	50
T&B Inner Pack	50
Package in Units	250
Package Type	Standard
T&B Sold in UOM	Each
T&B Weight Per UOM	7.5 lbs. per 1000

Application Support

Overview	Available on Website
----------	----------------------

Wire Guide Tables

Available on Website

Notes

Not available on Mylar Tape.

Certifications

RoHS Compliance

Yes

Certifications



File Nbr:

E9809

For further technical assistance, please contact us...

Thomas & Betts - USA
8155 T&B Blvd.
Memphis, TN 38125
www.tnb.com

T&B Technical Support
MS 3B-50
8155 T&B Blvd.
Memphis, TN 38125

Hours: 7AM - 6PM CDT
Monday-Friday
Phone: (888) 862-3289
Fax: (901) 252-1321
Email:techsupport@tnb.com