

Pass & Seymour



Straight Blade Plugs & Connectors Miscellaneous Configurations


IP20
Suitability



3869





3861




3867

| Catalog Number | Rating | | Description | Cord Diameter | NEMA Config. No. | 3rd Party Compliance | | |
|-------------------------------------|--------|--------------|---------------------|---------------|------------------|----------------------|------|----|
| | A. | V. | | | | UL | FSUL | CS |
| 2 Pole, 3 Wire Grounding | | | | | | | | |
| 43379 | 30 | 125 | Angled Plug, Yellow | | 5-30P | | | |
| 43399 | 50 | 125 | Angled Plug, Yellow | | 5-50P | | | |
| 3869 | 30/50 | 250 | Angled Plug, Black | .56"-1.1" | 6-30P/6-50P | | • | |
| 3 Pole, 3 Wire Non-Grounding | | | | | | | | |
| 3861 | 30/50 | 125/250 | Angled Plug, Black | .56"-1.1" | 10-30P/10-50P | | • | |
| 9977 | 20 | 125/250 | Plug, Nylon | | 10-20P | | • | |
| 7088 | 20 | 125/250 | Connector, Armored | | 10-20R | | • | |
| 3 Pole, 4 Wire Grounding | | | | | | | | |
| 5746AN | 30 | 125/250 | Angled Plug, Yellow | | 14-30P | | • | |
| 5741AN | 30 | 3ø, 250 | Angled Plug, Yellow | | 15-30P | | • | • |
| 5745AN | 50 | 125/250 | Angled Plug, Yellow | | 14-50P | | • | |
| 14629 | 60 | 125/250 | Angled Plug, Yellow | | 14-60P | | • | |
| 5751AN | 50 | 3ø, 250 | Angled Plug, Yellow | | 15-50P | | • | • |
| 5761AN | 60 | 3ø, 250 | Angled Plug, Yellow | | 15-60P | | • | • |
| 3867 | 30/50 | 125/250 | Angled Plug, Black | .56"-1.1" | 14-30P/14-50P | | • | • |
| 4 Pole, 4 Wire Non-Grounding | | | | | | | | |
| 7251DF | 20 | 3øY, 120/208 | Plug, Yellow | .365"-.775" | 18-20P | | • | • |
| 8302AN | 60 | 3øY, 120/208 | Angled Plug, Yellow | | 18-60P | | • | |

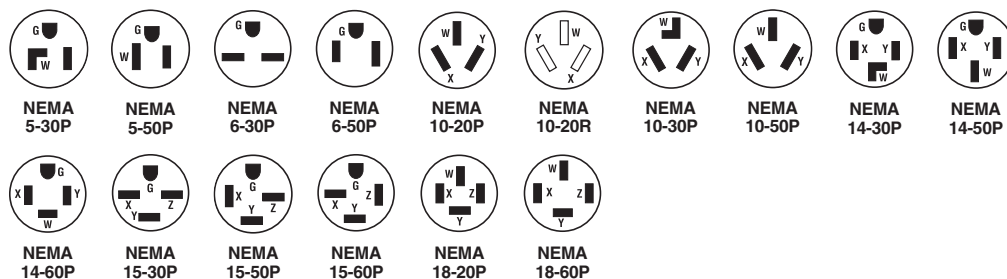


7088




7251DF



5741AN



9977



8302AN

All devices listed on this page conform to NEMA WD-1 and WD-6.