


# QT878

<b>NVR Technology</b>	IP
<b>Channels</b>	8
<b>Recording Resolution</b>	4MP / 3MP / 1080p / 720p
<b>Live Viewing Resolution</b>	1080p, 4K
<b>Live Display FPS</b>	30 FPS per Channel
<b>Hard Drive</b>	Supports 1 HDD up to 6TB
<b>Remote Monitoring</b>	10 Simultaneous Users
<b>Compatibility</b>	Mac and PC
<b>Connects With</b>	IP Cameras
<b>Monitor Connections</b>	HDMI, VGA
<b>Compression Format</b>	H.264, H.265

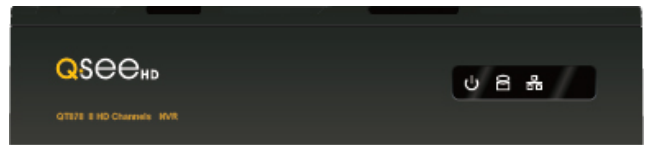

## NVR

Video Compression	H.264 / H.265
Live Display Resolution	1080p, 4K
Live Display FPS	30 FPS
Display Modes	1, 4, 8, Auto Sequence
Languages	English, Chinese (Simplified & Traditional), Czech, French, Dutch, German, Italian, Japanese, Portuguese, Romanian, Russian, Spanish

## RECORDING RESOLUTION OPTIONS

4MP	2560 x 1440 pixels
3MP	2304 x 1296 pixels
1080P	1920 x 1080 pixels
720P	1280 x 720 pixels

## RECORDING

Recording Modes	Manual, Time Schedule, Motion Detection, Alarm
Backup Methods	PC, Flash, USB Hard Drive, eSATA

## PLAYBACK ON NVR

Playback Speed	4MP at 30 FPS per channel	240 FPS Total
	3MP at 30 FPS per channel	240 FPS Total
	1080P at 30 FPS per channel	240 FPS Total
	720P at 30 FPS per channel	240 FPS Total
Number Channels	8	

## REMOTE MONITORING

QTVIEW	Yes
Dual Stream	720p, D1, CIF
Simultaneous Users	10

## COMPATIBILITY

Software Support	QT View
Mobile Support	iPhone, iPad, Android,
Computer Support	WinXP, Vista, Win7/8, Mac OS 10.7/10.8/10.9/10.10
ONVIF	2.3

## VIDEO, AUDIO & ALARM PORTS

Video In	8 RJ45 POE
Video Out	HDMI, VGA
Alarm In	8 (through IP cameras)
Alarm Out	None
Audio In	1 RCA, 8 through IP cameras
Audio Out	1 RCA

## COMMUNICATION PORTS

Network	RJ45 10/100/1000 Mbps
USB	2 USB 2.0
eSATA	0

## ACCESSORIES

Control	USB Mouse, Remote Control
Connectors / Cables	HDMI Cable, adapter
Mounting Hardware	Screws for Hard Drives
Other	Quick Start Guide

## (QT878 cont'd...)

### HARD DRIVES

Maximum Size	6TB
Number Supported	1

### PTZ

PTZ Support	Through CAT5e cable
Supported Protocols	Provided from camera

### POWER

Power Supply	DC48V
Power Consumption	<5W (w/o HD)

### PHYSICAL

Weight	1.2 lbs
Dimensions	10.5"W X 8.1"D X 2"H
Operating Temperature	14° - 131°F 10-90% Humidity

