



Features

- 1,2,4 or 8 Channel Systems
- 12 / 24Vdc or 230Vac Supply
- CE and FCC Approved Tx¹
- Range
 - FireFly up to 100 metres
 - FireBlade up to 500 metres
- Reliable FM Technology
- High Security RF Protocol
- 'Easy Learn' Tx Encoder Feature
- Easy Installation Via Screw Terminals.
- 4 Relays 6A @ 230Vac
- Momentary / Latch / Timed Outputs
- Timed Output Adjustable 0 To 5 mins
- Receiver Rated IP68
- Versatile operation modes: Many to Many, One to Many, Many to One.

Applications

- Lighting Control
- General Purpose Remote Switching
- Industrial remote Switching
- Access Control

Description

A Range of general purpose remote control systems

Installation simply requires connections to power supply and the output relay screw terminals. The output relays are activated by the button press on the transmitter encoder.

Housed in a rugged IP68 weatherproof enclosure, the receiver has the capacity to learn up to 15 transmitter button pairings. These are memorised even if the power is removed.

Each individual switch on each of the transmitters may be paired with any or all of the receiver relay outputs.

The decoder is supplied in an IP68 rated enclosure with Cable Gland and wall mounting lugs.

¹ See FCC conditions Page 6

FireFly Systems LOS Range 100m



Part Number	Description	Freq (MHz)	Range** (Metres)
FIREFLY-S1	FM RC System 1 ch	433.92	100
FIREFLY-S2	FM RC System 2 ch	433.92	100
FIREFLY-S4	FM RC System 4 ch	433.92	100

Additional FireFly Transmitters



Part Number	Description	Freq (MHz)	Range** (Metres)
FIREFLY-TX1	Transmitter 1 switch	433.92	100
FIREFLY-TX2	Transmitter 2 switch	433.92	100
FIREFLY-TX4	Transmitter 4 switch	433.92	100
FIREFLY-TX8	Transmitter 8 switch	433.92	100
FIREFLY-TX-IPKIT	Belt Clip and 'O' Ring, Seals Transmitter to IP67		

FireBlade Systems LOS Range 500m



Part Number	Description	Freq (MHz)	Range** (Metres)
FIREBLADE-S1	FM RC System 1 ch	434.525	500
FIREBLADE-S2	FM RC System 2 ch	434.525	500
FIREBLADE-S4	FM RC System 4 ch	434.525	500

Additional FireBlade Transmitters



Part Number	Description	Freq (MHz)	Range** (Metres)
FIREBLADE-TX1	Transmitter 1 switch	434.525	500
FIREBLADE-TX2	Transmitter 2 switch	434.525	500
FIREBLADE-TX4	Transmitter 4 switch	434.525	500
FIREBLADE-TX8	Transmitter 8 switch	434.525	500
FIREFLY-TX-IPKIT	Belt Clip and 'O' Ring, Seals Transmitter to IP67		

** Range stated is optimum, direct line of sight. In worst conditions this can be reduced significantly.

Custom Options


These systems may be supplied as OEM units. Both transmitter and receiver use overlay stickers as part of the assembly which may easily be customised to incorporate any other logo etc. Please contact our sales dept for further information.

Power Supply

This unit is designed to be a fixed installation, operated from either 12/24Vdc or 230Vac. Under no circumstances should the receiver be connected to more than one supply. Before removing the cover ensure that the mains input supply is isolated. Maintenance to the product that involves removal of the cover should only be carried out by a competent person or qualified electrician.

Data Outputs


Each output relay provides an isolated switch. Connections are Common (COM), Normally Open (NO) and Normally Closed (NC).

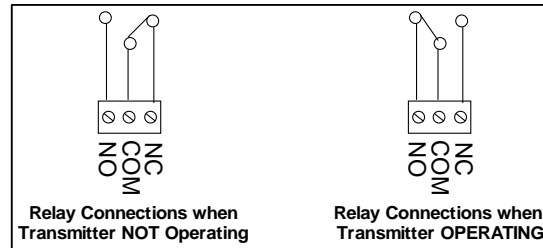

Connecting a Relay output to an Application

Below is a simple example showing one possible way to wire a relay in order to give switched power to an external load:

When the relay is energised the 'COM' connects to 'NO' and power is applied to the Load.

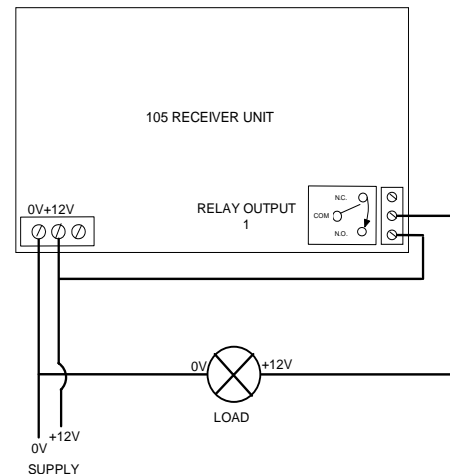

Pairing a Transmitter to a Receiver

Each transmitter has a unique identity. Each time a switch is pressed, the transmitter emits a highly secure RF signal (appears as a random encrypted data stream). The Receiver can learn this encrypted signal and allocate to an output.

Any transmitter switch may be paired to one or many of the receiver's outputs, or a transmitter single switch may be paired to any number of receiver's outputs to enable a powerful and flexible remote control system.

The only limitation is that each receiver has a maximum capacity of 15 pairings, these can be from the same or any number of transmitters.

Hint: the same transmitter may be taught to any number of receivers to create 'master keys'.

To learn a new transmitter switch follow this procedure

Any transmitter button can be learnt to one or many of the receiver output relays.
Each button must be learnt to each relay individually by following this procedure:


1. To select the receiver output relay to learn to:
 - a. Briefly press the receiver Learn switch (SW1) once
 - b. The Learn LED will flash once to indicate output relay 1 is selected
 - c. After the LED stops flashing, press the Learn switch again to select the next relay channel
 - d. Repeat step c until the required output relay is selected.
2. Press the button on the transmitter you want to learn to the relay output.
3. The Learn LED will then illuminate, press the same transmitter button again.
4. The Learn LED will then flash to indicate learning is complete.
5. To test the operation, press the transmitter button again and you will hear the relay 'click' as it operates.

Erasing Receivers Memory

1. Press and hold the receiver Learn Switch for approx 10 seconds.
2. When the Learn LED turns OFF all memory is erased
3. This is factory default state which is indicated by all output LED's flashing together.

NOTE: You cannot erase individual Tx encoders

Receiver Outputs

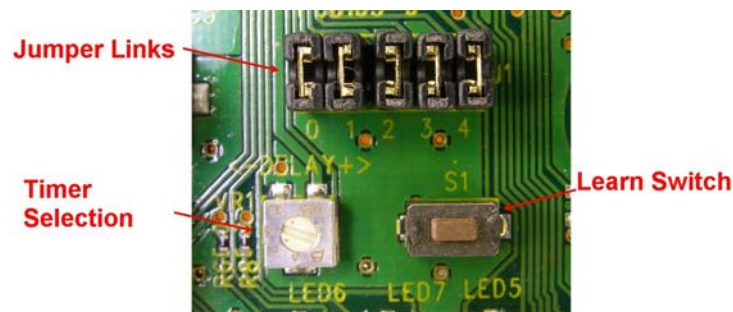

The jumper links configure the outputs to be Momentary, Latching or Timed.
The jumper links are made / removed by a small link 'cap' placed over the pin header.

Jumper Links (LK2 - 4)	Outputs 2 - 4
Open	Mom (The Output operates for as long as the transmitter switch is held on)
Connected	Latch (The Output changes state each time the Transmitter is operated)

LK0	LK1	Relay Outputs
Open	Open	Output 1 Momentary
Open	Connected	Output 1 Latching
Connected	Open	All Outputs fixed to ½ Second Momentary o/p
Connected	Connected	Output 1, 0 to 5 minutes using Timer selection Potentiometer.



Technical Specifications

Transmitters : FireFly, FireBlade

Enclosure Rating: Standard IP40 (TBC)
With IPKit IP65 (TBC)
Battery Type: CR2032 (supplied)
Dimensions: 90 x 54 x 27 mm (Note: FireBlade is supplied with external Antenna)

Electrical Characteristics	Min	Typical	Max	Units
Supply Voltage		3V		V
Supply Current				mA
Frequency: FireFLY: Wideband FireBLADE: Narrowband	432.90 434.450	433.920 434.525	434.10 434.600	MHz
RF Output Power (ERP) @ 433 MHz	-	3	10	mW

Receiver Decoder

Enclosure Rating IP68
Storage Temperature: -10 to +70° Celsius.
Operating Temperature: 0 to +55° Celsius.
Dimensions 169 x 132 x 85mm (not including antenna)

ELECTRICAL CHARACTERISTICS	MIN	TYPICAL	MAX	DIMENSION
Supply Voltage for +12 v	10	12.0	16	Vdc
Supply Voltage for +24 v	22	24.0	28	Vdc
Supply Voltage for 230Vac		230		Vac
Relay Rating* (230Vac) RLY1-4		5	12	A
Supply Current : Quiescent All relays operating*		16 140		mA
Time delay from Tx on Switch to Rx Relay operation			100	mS
Time delay from Tx sw relax to Rx Relay release			300	MS

***The relay contacts in this unit are for functional use only and must not be used for isolation purposes**


Notes on FCC and CE approval.

- Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
- This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
- Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



Receiver Mechanical Dimensions

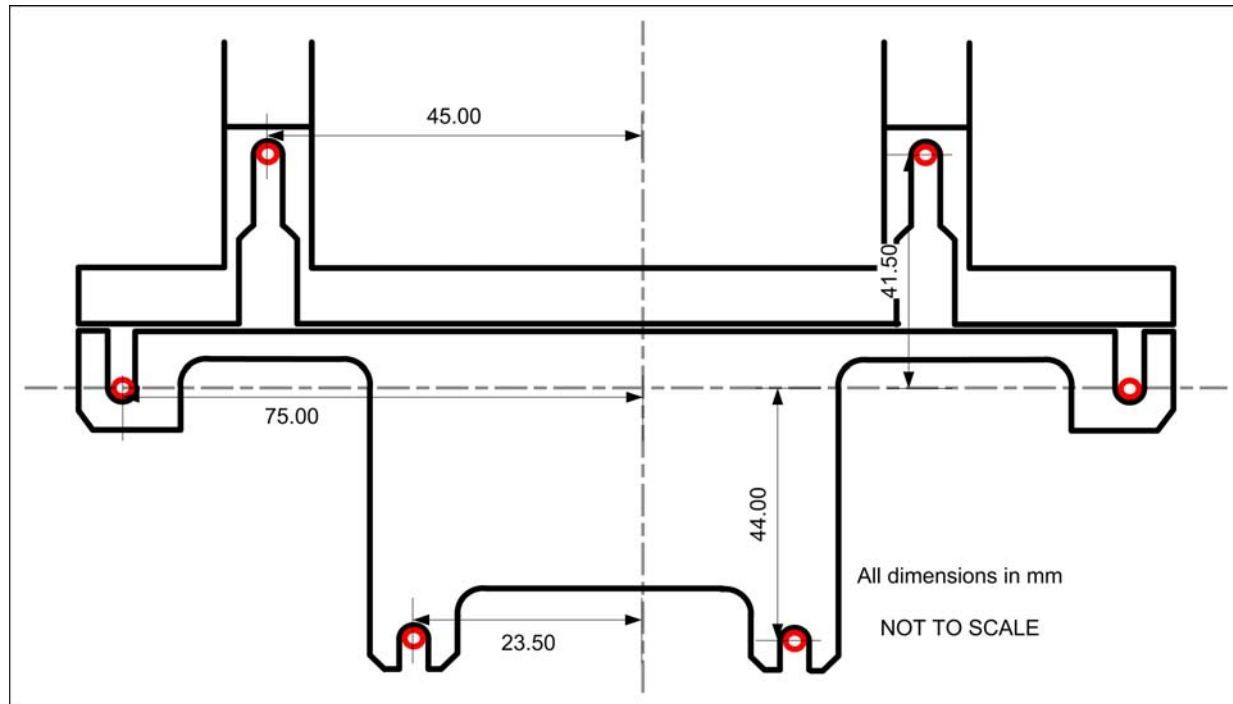

R F Solutions Ltd.,
Unit 21, Cliffe Industrial Estate,
Lewes, E. Sussex. BN8 6JL. England.
Email : sales@rfsolutions.co.uk <http://www.rfsolutions.co.uk>
Tel: +44 (0)1273 898 000 Fax: +44 (0)1273 480 661

Information contained in this document is believed to be accurate, however no representation or warranty is given and no liability is assumed by R.F. Solutions Ltd. with respect to the accuracy of such information. Use of R.F.Solutions as critical components in life support systems is not authorised except with express written approval from R.F.Solutions Ltd.