



The new degree of comfort.™



Residential Gas
Professional **Classic Plus**
Heavy Duty ULN Water Heaters

Professional **Classic Plus**™ Heavy Duty Ultra Low NOx water heaters exceed ANSI standards for flammable vapor ignition resistance

Performance

- Recovery Capacity: 72.8 gallons per hour (delivers approximately 113 gallons of hot water in the first hour for 75-gallon models and 115 gallons for 98-gallon models)**

Flammable Vapor Detection System

- Protective control system that disables the heater in the presence of flammable vapors
- Maintenance free – no filter to clean

High Altitude Compliant

- All models are certified for applications up to 8,500 feet above sea level

Plus...

- Integrated self diagnostic system control for easy installation and service
- Eco-friendly burner, ultra low NOx design meets 14 ng/J NOx requirements
- Premium grade anode rod provides long-lasting tank protection
- Enhanced-flow brass drain valve
- Temperature and pressure relief valve included
- Low lead compliant
- Side water connections for space heating applications
- Standard replacement parts
- Standard 110-volt electrical connection
- Durable silicon nitride igniter – Hot Surface Ignition (HSI)


Warranty

- 8-Year limited tank and parts warranty*
- With ProtectionPlus™ the 8-year limited tank warranty becomes 12-year

*See Residential Warranty Certificate for complete information


Efficiency | All models tested according to ANSI test procedures, and meet or exceed the thermal efficiency and standby loss requirements of current ASHRAE standard (EPact). Also exceeds energy efficiency codes of all states including California Energy Commission (CEC).

Safety and Construction | Design certified by CSA: For operation at 160 degrees; meets all safety and construction requirements of ANSI Z21.10.3; as an automatic storage or instantaneous water heater; as an automatic circulating tank water heater; and for operation on combustible floors and in alcove installations. All models are North Carolina Code compliant.
Certified for 150 PSI maximum working pressure.

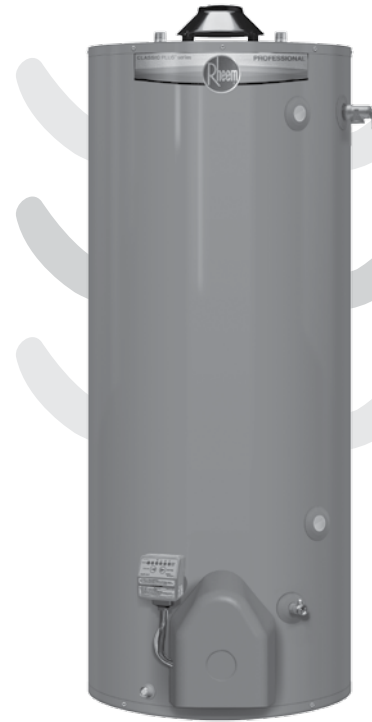

Professional **Classic Plus** Heavy Duty Ultra Low NOx

75 and 98-Gallon Capacities
75,100 Btu/h
Natural Gas

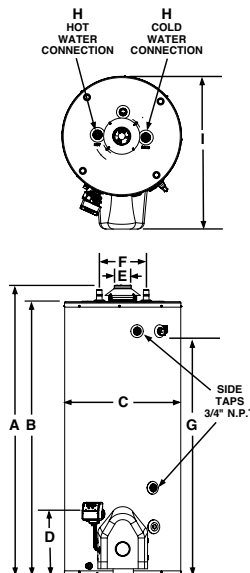

TYPE	DESCRIPTION		FEATURES		ROUGHING IN DIMENSIONS (SHOWN IN INCHES)									
	GAL. CAP.	MODEL NUMBER	GAS INPUT IN THOUS. BTU/H NAT.	RECOVERY IN G.P.H. 100° RISE** NAT.	HT. TO VENT A	TANK HT. B	DIAM. C	HT. TO GAS CONN. D	VENT SIZE E	WATER CONN. CNTR. F	HT. TO SIDE T&P VALVE G	WATER CONN. SIZE H	FRONT TO BACK I	SHIP. WT. (LBS)
Tall	75	PRO+G75-75U RH	75.1	72.8	64-1/8	60-1/4	26-1/4	14-1/4	4	11	52-1/4	1	33-3/4	300
Tall	98	PRO+G98-75U RH	75.1	72.8	67-7/8	64	27-1/8	14-1/4	4	11	56-1/8	1	34-3/4	370

**Recovery Capacity is based upon a 100° F water temperature rise and calculated per ANSI Z21.10.3 standards. First hour hot water delivery is based upon 77° water temperature rise.

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Water Heating • 101 Bell Road
Montgomery, Alabama 36117-4305 • www.rheem.com



INTEGRATED HOME COMFORT

PRINTED IN U.S.A. 03/15 WP FORM NO. PRO+G RHLUNHD