

PHANTOM 4 ADVANCED

Quick Start Guide

Guía de inicio rápido

Guide de démarrage rapide

Guia de Início Rápido

V1.0




Contents

EN	Quick Start Guide	2
ES	Guía de inicio rápido	8
FR	Guide de démarrage rapide	14
PT	Guia de Início Rápido	20


Phantom 4 Advanced

The DJI PHANTOM™ 4 Advanced is a smart prosumer flying camera capable of shooting 4K video at 60fps and at up to 100mbps, and capturing 20 megapixel stills. Using upgraded TapFly™ and ActiveTrack™ through the DJI GO™ 4 app, you can fly anywhere visible on your screen or track a moving subject smoothly and easily with a simple tap. The brand new camera uses a 1-inch CMOS sensor offering unprecedented clarity, lower noise, and better quality images.

EN

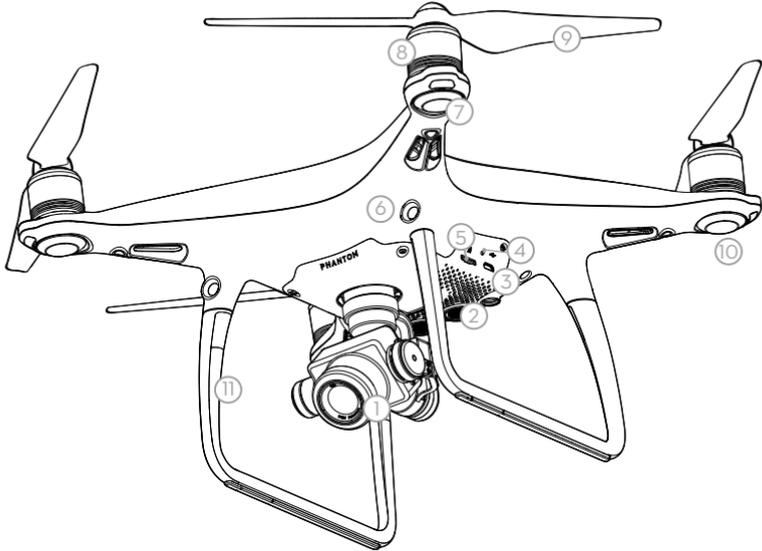

- | | |
|--|--------------------------------|
| 1. Gimbal and Camera | 8. Motors |
| 2. Downward Vision System* | 9. Propellers |
| 3. Micro USB Port | 10. Aircraft Status Indicators |
| 4. Camera/Linking Status Indicator and Link Button | 11. Antennas |
| 5. Camera Micro SD Card Slot | 12. Intelligent Flight Battery |
| 6. Forward Vision System | 13. Power Button |
| 7. Front LEDs | 14. Battery Level Indicators |



* The Vision System is affected by surrounding conditions. Read the Disclaimer and Safety Guidelines and watch the tutorials in the DJI GO 4 app or on the official DJI website to learn more.
<http://www.dji.com/phantom-4-adv>

Remote Controller


The powerful remote controller of the Phantom 4 Advanced has a transmission range extending up to 4.3 mi (7 km)*. It features physical buttons and dials to control exposure, camera tilt, photo capture and video recording.

Built into the remote controller is DJI LIGHTBRIDGE™, which when paired with a compatible mobile device gives you a live HD view from the Phantom's camera. An internal battery ensures a long battery life and ease of use.


EN

1. Power Button
2. Return-to-Home (RTH) Button
3. Control Sticks
4. Status LED
5. Battery Level LEDs
6. Power Port
7. Mobile Device Holder
8. Small Device Positioning Tabs (for mobile phones)
9. Antennas
10. Handle Bar

11. Gimbal Dial
12. Camera Settings Dial
13. Record Button
14. Flight Mode Switch
15. Shutter Button
16. Intelligent Flight Pause Button
17. C1 and C2 Buttons (customizable)
18. USB Port
19. Micro USB Port

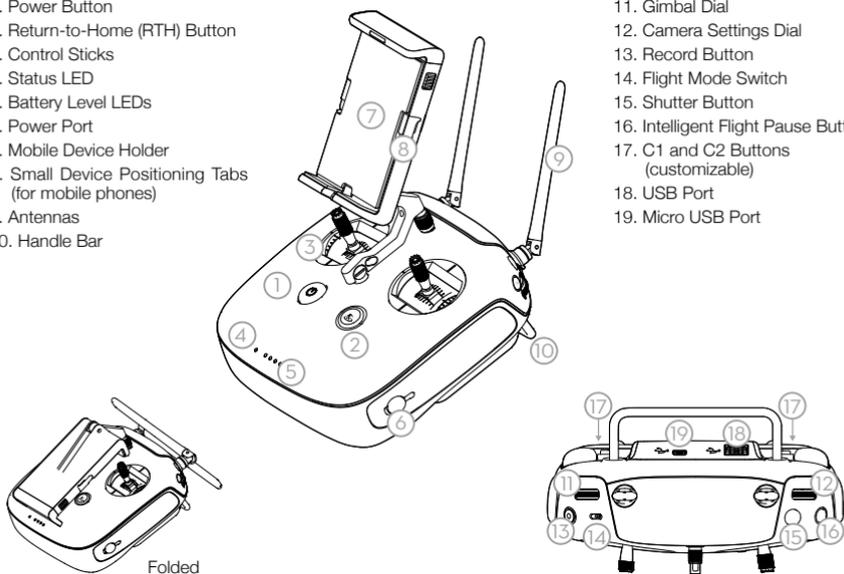

The default flight control is known as Mode 2. The left stick controls the aircraft's altitude and heading, while the right stick controls its forward, backward, left and right movements. The gimbal dial controls the camera's tilt.

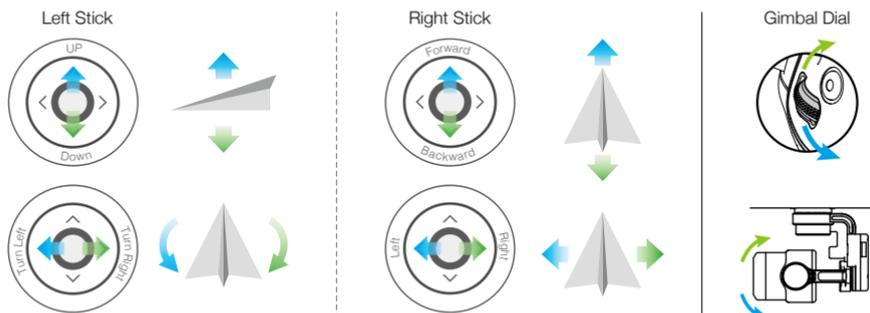

* The remote controller is able to reach its maximum transmission distance (FCC) in a wide open area with no Electro-Magnetic Interference, and at an altitude of about 400 feet (120 meters).

Using Phantom 4 Advanced

EN

1. Download the DJI GO 4 App

Search for 'DJI GO 4' on the App Store or Google Play, and install the app on your mobile device.



DJI GO 4 App

2. Watch the Tutorial Videos


Watch the tutorial videos at www.dji.com or in the DJI GO 4 app.



Tutorial Videos

 • DJI GO 4 supports iOS 9.0 (or later) or Android 4.4 (or later).

3. Check the Battery Levels

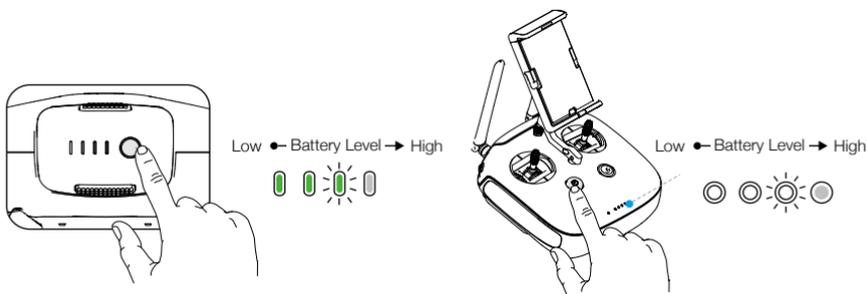


Press once to check the battery level. Press once, then again and hold to turn on/off.



4. Charge the Batteries



Remove the battery.



Charge Time:
~1 hr 20 min



Charge Time:
~3 hr 40 min

 • When charging is complete, the battery level indicators will automatically turn off.

5. Prepare the Remote Controller

Unfold

Press the button to release the clamp.

Place your mobile device and adjust the clamp to secure.

Connect your mobile device with a USB cable.

Strong Weak

6. Prepare for Takeoff

Remove the gimbal clamp from the camera.

Power on the remote controller and the aircraft.

Launch DJI GO 4, complete the first-time setup, and tap GO FLY.


First-time activation requires your DJI account and internet connection.

Internet

Press the propeller down onto the mounting plate and rotate in the lock direction until secure.

Silver propeller rings go on motors without black dots.

Black propeller rings go on motors with black dots.

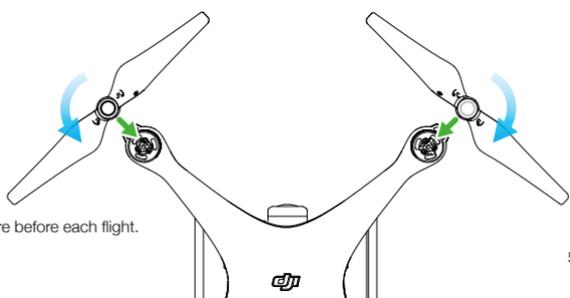

⚠ • Check that the propellers are secure before each flight.

7. Flight

Ready to Go (GPS)

Before taking off, make sure the Aircraft Status Bar in the DJI GO 4 app indicates 'Ready to Go (GPS)' or 'Ready to Go (Vision)' if flying indoors.

In the DJI GO 4 App:



Auto Takeoff

The aircraft will take off and hover at an altitude of 4 feet (1.2 meters).



Auto Landing

The aircraft will land vertically and stop its motors.



Return-to-Home (RTH)

Bring the aircraft back to the Home Point. Tap again to stop the procedure.



Normal

You are in control of the Phantom, with satellite and Return-to-Home support.



TapFly

Tap on your screen to fly your Phantom in that direction, avoiding obstacles as it flies.



ActiveTrack


Mark an object on your screen to track it as it moves.

- ⚠ Watch the tutorial in the DJI GO 4 app or on the official DJI website to learn more.
- Always set an appropriate RTH altitude before takeoff. When the aircraft is returning to the Home Point, you should guide it with the control sticks. Refer to the Disclaimer and Safety Guidelines for more details.

Manual Takeoff



Combination Stick Command to start/stop the motors



Left stick up (slowly) to take off


Manual Landing



Left stick down (slowly) until you touch the ground

Hold a few seconds to stop the motors

- ⚠ Rotating propellers can be dangerous. Do not start the motors when there are people nearby.
- Always keep your hands on the remote controller so long as the motor is still spinning.
- Stop motor mid-flight: Pull the left stick to the bottom inside corner while simultaneously pressing the RTH button. Only stop motors mid-flight in emergency situations when doing so can reduce the risk of damage or injury. Refer to the user manual for details.



Stop motor mid-flight




It's important to understand basic flight guidelines, for the safety of both you and those around you. Don't forget to read the Disclaimer and Safety Guidelines.

Specifications

• Aircraft

Weight (Battery & Propellers Included)	1368 g
Max Ascent Speed	S-mode: 6 m/s; P-mode: 5 m/s
Max Descent Speed	S-mode: 4 m/s; P-mode: 3 m/s
Max Speed	45 mph (72 kph) (S-mode); 36mph (58 kph) (A-mode); 31 mph (50 kph) (P-mode)
Max Service Ceiling Above Sea Level	19685 ft (6000 m)
Max Flight Time	Approx. 30 minutes
Operating Temperature	32° to 104° F (0° to 40° C)
Satellite Positioning Systems	GPS/GLONASS
Hover Accuracy Range	Vertical: ±0.1 m (With Vision Positioning); ±0.5 m (With GPS Positioning) Horizontal: ±0.3 m (With Vision Positioning); ±1.5 m (With GPS Positioning)



• Gimbal

Controllable Range	Pitch: -90° to +30°
--------------------	---------------------

• Vision System

Velocity Range	≤31 mph (50 kph) at 6.6 ft (2 m) above ground
Altitude Range	0 - 33 ft (0 - 10 m)
Operating Range	0 - 33 ft (0 - 10 m)
Obstacle Sensory Range	2 - 98 ft (0.7 - 30 m)
Operating Environment	Surfaces with clear patterns and adequate lighting (> 15 lux)

• Camera

Sensor	1" CMOS; Effective pixels: 20M
Lens	FOV (Field of View) 84°, 8.8 mm (35 mm format equivalent: 24 mm), f/2.8 - f/11, auto focus at 1 m - ∞
ISO Range	Video: 100 - 3200 (Auto); 100 - 6400 (Manual); Photo: 100 - 3200 (Auto); 100 - 12800 (Manual)
Mechanical Shutter	8 - 1/2000 s
Electronic Shutter	8 - 1/8000 s
Max Image Size	3:2 Aspect Ratio: 5472x3648; 4:3 Aspect Ratio: 4864x3648; 16:9 Aspect Ratio: 5472x3078
Still Photography Modes	Single Shot Burst Shooting: 3/5/7/10/14 frames Auto Exposure Bracketting (AEB): 3/5 bracketed frames at 0.7EV Bias Interval: 2/3/5/7/10/15/30/60 s

Video Recording Modes

H.265	H.264
• C4K: 4096x2160 24/25/30p	• C4K: 4096x2160 24/25/30/48/50/60p
• 4K: 3840x2160 24/25/30p	• 4K: 3840x2160 24/25/30/48/50/60p
• 2.7K: 2720x1530 24/25/30/48/50/60p	• 2.7K: 2720x1530 24/25/30/48/50/60p
• FHD: 1920x1080 24/25/30/48/50/60/120p	• FHD: 1920x1080 24/25/30/48/50/60/120p
• HD: 1280x720 24/25/30/48/50/60/120p	• HD: 1280x720 24/25/30/48/50/60/120p

Video Storage Bitrate

100 Mbps

Supported File Systems

FAT32 (≤ 32 GB); exFAT (> 32 GB)

Photo

JPEG, RAW (DNG), JPEG + RAW

Video

MP4/MOV (AVC/H.264; HEVC/H.265)

Supported SD Cards

Micro SD, Max Capacity: 128 GB. Class 10 or UHS-1 rating required

Operating Temperature

32° to 104° F (0° to 40° C)

• Remote Controller


Operating Frequency	2.400 - 2.483 GHz
Max Transmission Distance	FCC: 4.3 mi (7 km); CE: 2.2 mi (3.5 km); SRRC: SRRC: 2.5 mi (4 km); (Unobstructed, free of interference)
Operating Temperature	32° - 104° F (0° - 40° C)
Battery	6000 mAh LiPo 2S
Transmitter Power (EIRP)	26 dBm (FCC); 17 dBm (CE); 20 dBm (SRRC)
Operating Voltage	1.2 A @ 7.4 V

• Charger

Voltage	17.5 V
Rated Power	100 W

• Intelligent Flight Battery (PH4-5870mAh-15.2V)

Capacity	5870 mAh
Voltage	15.2 V
Battery Type	LiPo 4S
Energy	89.2 Wh
Net Weight	468 g
Charging Temperature Range	41° to 104° F (5° to 40° C)
Max Charging Power	100 W



For more information, read the User Manual:
<http://www.dji.com/phantom-4-adv>

* This content is subject to change without prior notice.

PHANTOM and DJI are trademarks of DJI.
Copyright © 2017 DJI All Rights Reserved.



Designed by DJI. Printed in China.