

Digital Indoor Monitor

Quick Start Guide



Foreword

General

This manual introduces basic operations of the digital indoor monitor (hereinafter referred to as "VTH").

Models

- 2-wire VTH that supports Wi-Fi.
- Non 2-wire VTH that supports Wi-Fi.

Safety Instructions

The following categorized signal words with defined meaning might appear in the manual.

Signal Words	Meaning
 DANGER	Indicates a high potential hazard which, if not avoided, will result in death or serious injury.
 WARNING	Indicates a medium or low potential hazard which, if not avoided, could result in slight or moderate injury.
 CAUTION	Indicates a potential risk which, if not avoided, could result in property damage, data loss, lower performance, or unpredictable result.
 TIPS	Provides methods to help you solve a problem or save you time.
 NOTE	Provides additional information as the emphasis and supplement to the text.

Revision History

Version	Revision Content	Release Date
V1.0.0	First release.	November 2021

Privacy Protection Notice

As the device user or data controller, you might collect the personal data of others such as their face, fingerprints, and license plate number. You need to be in compliance with your local privacy protection laws and regulations to protect the legitimate rights and interests of other people by implementing measures which include but are not limited: Providing clear and visible identification to inform people of the existence of the surveillance area and provide required contact information.

About the Manual

- The manual is for reference only. Slight differences might be found between the manual and the product.
- We are not liable for losses incurred due to operating the product in ways that are not in compliance with the manual.
- The manual will be updated according to the latest laws and regulations of related jurisdictions. For detailed information, see the paper user's manual, use our CD-ROM, scan the QR code or visit our official website. The manual is for reference only. Slight differences might be found between the electronic version and the paper version.
- All designs and software are subject to change without prior written notice. Product updates might result in some differences appearing between the actual product and the manual. Please contact customer service for the latest program and supplementary documentation.
- There might be errors in the print or deviations in the description of the functions, operations and technical data. If there is any doubt or dispute, we reserve the right of final explanation.
- Upgrade the reader software or try other mainstream reader software if the manual (in PDF format) cannot be opened.
- All trademarks, registered trademarks and company names in the manual are properties of their respective owners.
- Please visit our website, contact the supplier or customer service if any problems occur while using the device.
- If there is any uncertainty or controversy, we reserve the right of final explanation.

Important Safeguards and Warnings

This section introduces content covering the proper handling of the device, hazard prevention, and prevention of property damage. Read carefully before using the device, comply with the guidelines when using it, and keep the manual safe for future reference.

Operation Requirements



- Check whether the power supply is correct before use.
- Do not unplug the power cord on the side of the device while the adapter is powered on.
- Operate the device within the rated range of power input and output.
- Transport, use and store the device under allowed humidity and temperature conditions.
- Do not drop or splash liquid onto the device, and make sure that there is no object filled with liquid on the device to prevent liquid from flowing into it.
- Do not disassemble the device without professional instruction.

Installation Requirements



- Do not connect the power adapter to the device while the adapter is powered on.
- Strictly comply with the local electric safety code and standards. Make sure the ambient voltage is stable and meets the power supply requirements of the device.
- Do not connect the device to two or more kinds of power supplies, to avoid damage to the device.
- Improper use of the battery might result in a fire or explosion.



- Personnel working at heights must take all necessary measures to ensure personal safety including wearing a helmet and safety belts.
- Do not place the device in a place exposed to sunlight or near heat sources.
- Keep the device away from dampness, dust, and soot.
- Install the device on a stable surface to prevent it from falling.
- Install the device in a well-ventilated place, and do not block its ventilation.
- Use an adapter or cabinet power supply provided by the manufacturer.
- Use the power cords that are recommended for the region and conform to the rated power specifications.
- Make sure the power supply meets the SELV (Safety Extra Low Voltage) requirements, and rated voltage conforms to the IEC60065, IEC60950-1 or IEC62368-1 standard. The requirements of the power supply are subject to the device label.
- The device is a class I electrical appliance. Make sure that the power supply of the device is connected to a power socket with protective earthing.

Table of Contents


Foreword	I
Important Safeguards and Warnings	III
1 Structure	1
1.1 Front Panel.....	1
1.2 Rear Panel (2-wire).....	1
1.3 Rear Panel (non 2-wire).....	2
2 Installation	3
2.1 Preparations.....	3
2.2 Wall-mounted Installation.....	3
3 VTH Configuration	4
3.1 Before You Begin	4
3.2 Initializing VTH and VTO.....	4
3.3 Configuring Network Parameters.....	7
3.3.1 WLAN.....	7
3.3.2 LAN	8
3.4 Configuring SIP Server	9
3.5 Configuring VTH.....	10
3.6 Configuring VTO	10
3.6.2 Adding Main VTO.....	11
3.6.3 Adding Sub VTO	11
4 Commissioning	12
4.1 VTO Calling VTH.....	12
4.2 VTH Monitoring VTO.....	12
Appendix 1 Cybersecurity Recommendations	14

1 Structure

The VTHs have the same front panel but differ in the ports in the rear panel. One supports 2-wire and the other does not.


1.1 Front Panel

Figure 1-1 Front panel

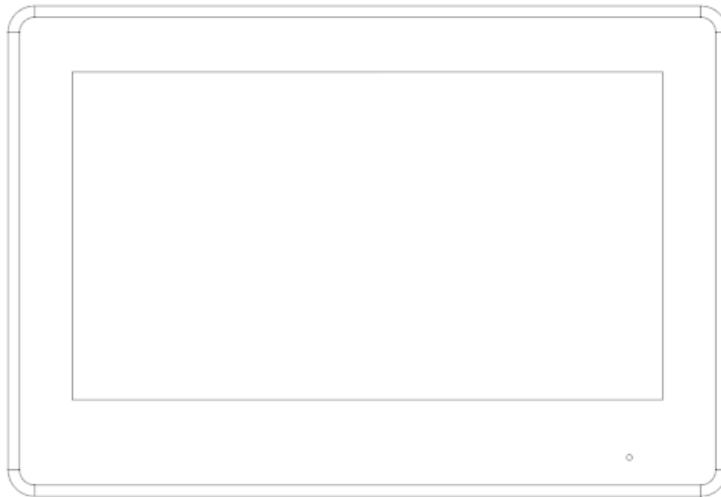


1.2 Rear Panel (2-wire)

Figure 1-2 Rear panel for 2-wire model

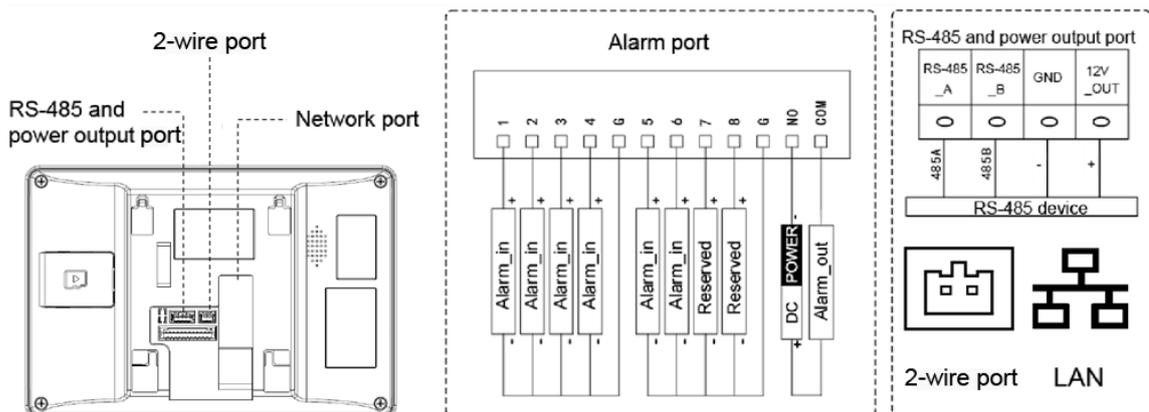

1.3 Rear Panel (non 2-wire)

Figure 1-3 Rear panel for non 2-wire model

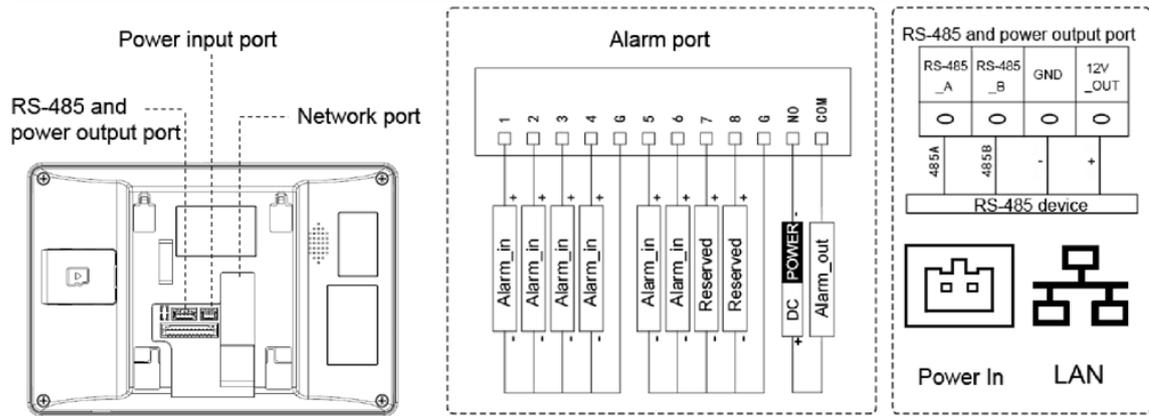

2 Installation

2.1 Preparations



- Do not install the VTH in harsh environment with condensation, high temperature, dust, corrosive substance and direct sunlight.
- In case of abnormality after powering on the VTH, cut off the power supply at once, and unplug the network cable. Power on after troubleshooting.
- Installation should be done by professional teams. Do not dismantle or repair the device by yourself in case of device failure. Contact after-sales service if you need any help.

2.2 Wall-mounted Installation


Directly install the VTH with a bracket onto a wall, which is suitable for all types of devices.

Step 1 Drill holes in the wall according to hole positions of the installation bracket.

Step 2 Fix the installation bracket on the wall with screws.

Step 3 Put the top of the device into the top of the installation bracket, and then push in the bottom of the VTH.

Figure 2-1 Wall-mounted installation

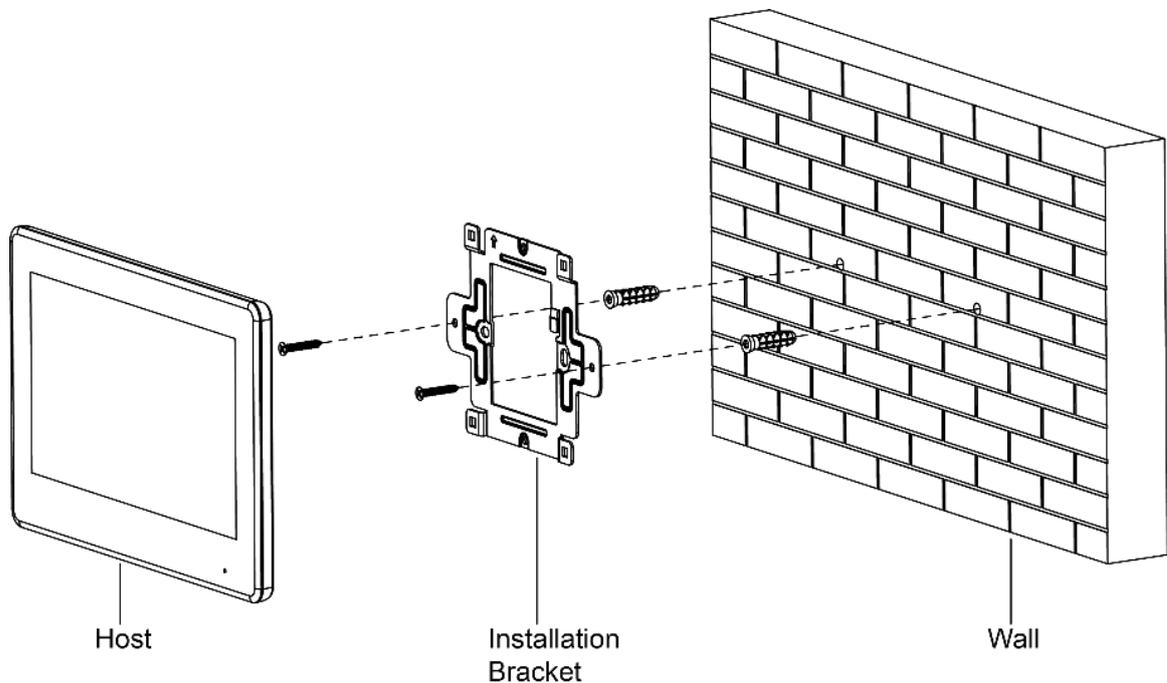

3 VTH Configuration

This chapter introduces the configuration of the VTH and digital outdoor station (hereinafter referred to as the “VTO”) to achieve the intercom function. Follow the instructions below to get started.

3.1 Before You Begin

- Make sure that there is no short or open circuit in the VTO and VTH.
- Plan IP and number (working as a phone number) for each VTO and VTH. Make sure that the VTH and VTO are on the network segment. For specific configuration of the VTO, please refer to the corresponding user’s manual.


3.2 Initializing VTH and VTO

For the first-time login, you need to initialize the VTH and the corresponding VTO. You can initialize the VTO through web or on the VTH. This section introduces how to initialize the VTO on the VTH.

Step 1 Power on the VTH.


Step 2 Select a region and language, and then tap **OK**.

Figure 3-1 Region and language

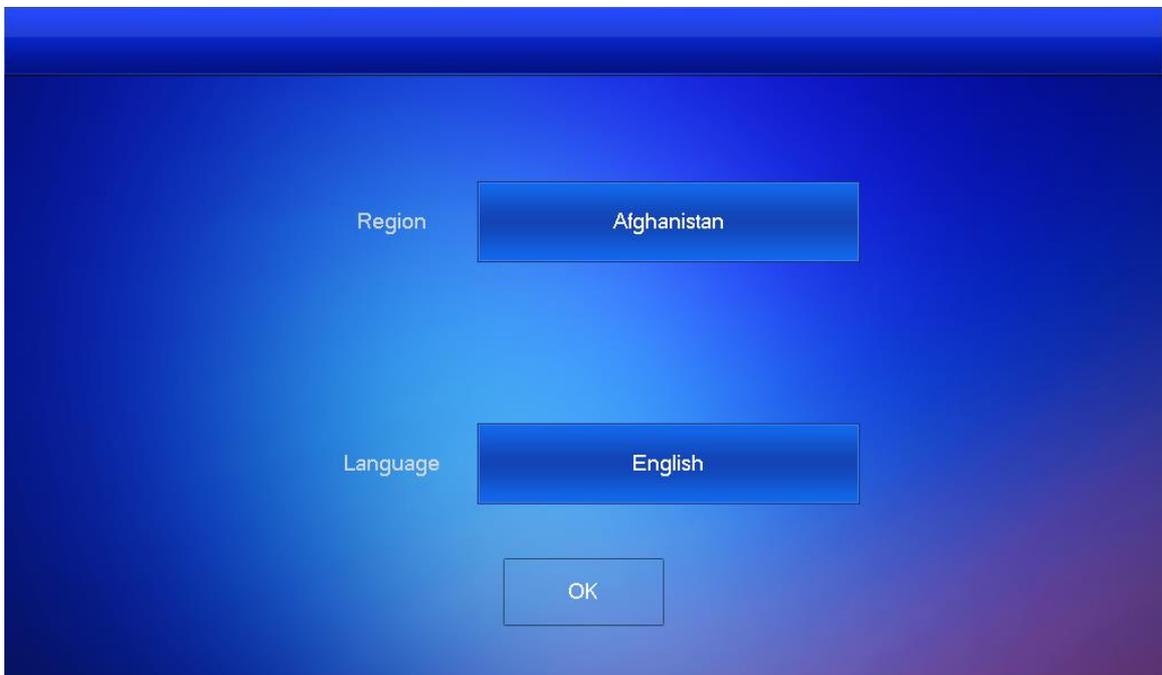


Step 3 Set the quick configuration type as **Villa**, and then tap **OK**.

Figure 3-2 Quick configuration

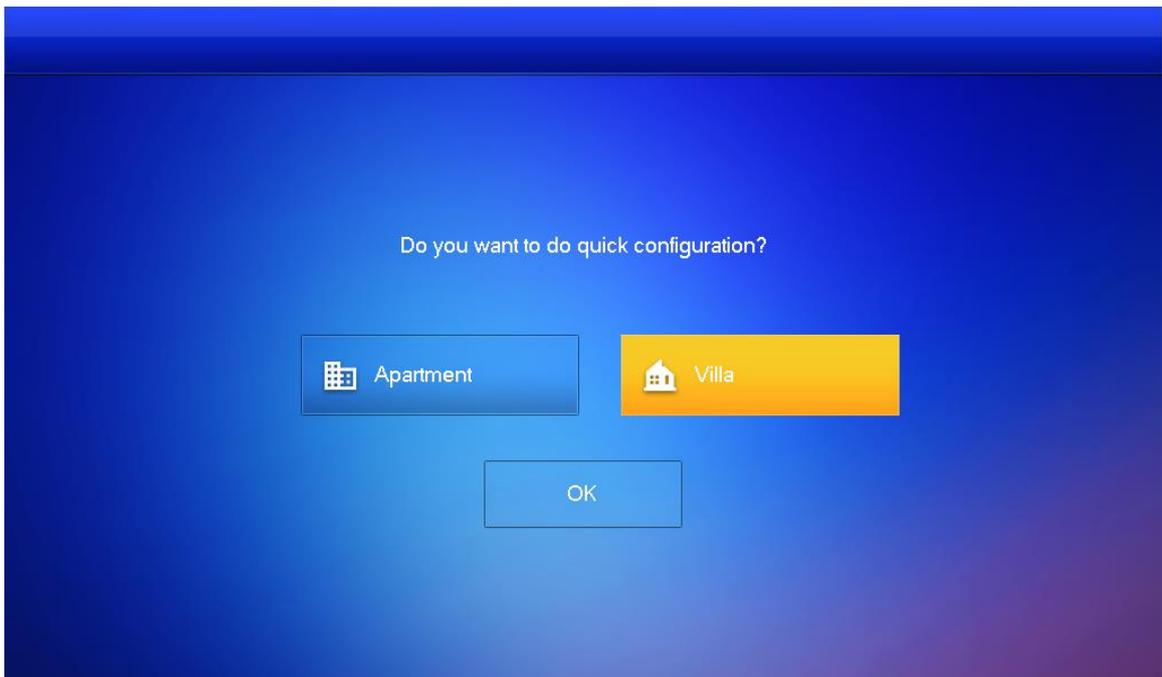

Step 4 Select **First-time Config**, and then tap **OK**.

Figure 3-3 Config mode

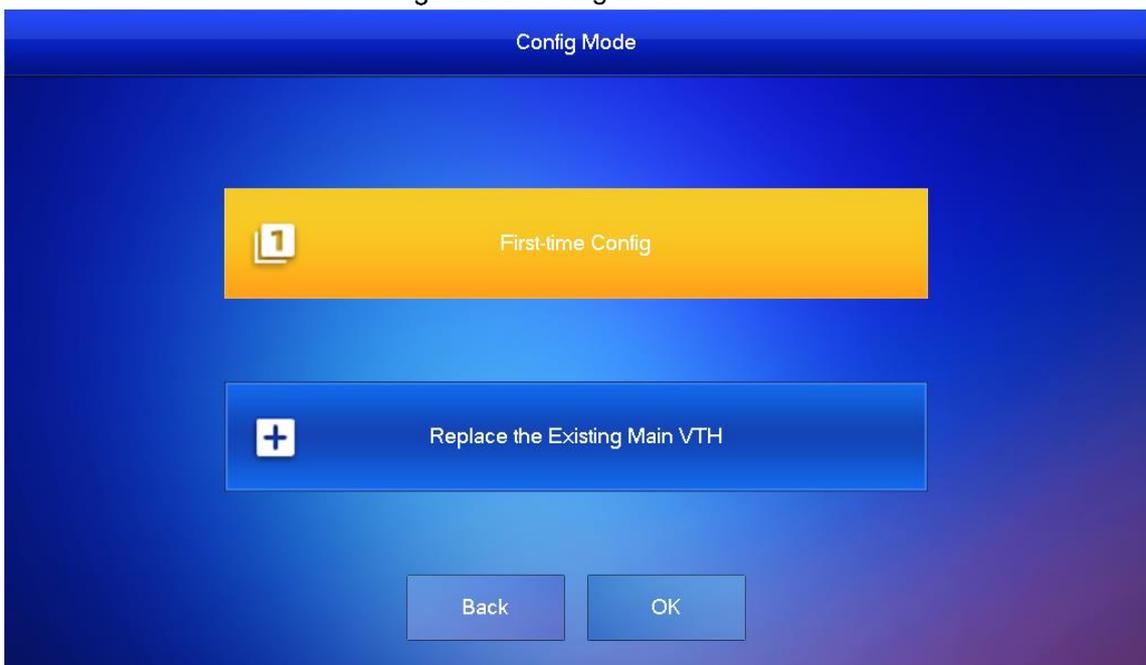

Step 5 Select **Static IP**, enter your planned VTH IP, net mask and gateway, and then tap **Next**.

Step 6 On the **Set VTH Password** screen, enter and confirm the password, and enter the email address, and then tap **Next**.

Figure 3-4 Set password for VTH

STEP 2/5 Set VTH Password

Password 6 digits password

Confirm Pwd 6 digits password

Email This email is used to reset the password

Back Next

Step 7 On the **Set VTO Password** screen, enter the password of VTO and confirm it, and then tap **Next**.

Figure 3-5 Set password for VTO

STEP 3/5 Set VTO Password

Password 8-32 characters password

Confirm PWD 8-32 characters password


Email This email is used to reset the password.

Back Next

Step 8 Tap **Initialize** to complete the initialization of the VTO and the main VTH, and then tap **Next**.

You need to make sure that the IP addresses of the VTH and VTO on the same network segment. Otherwise, VTH cannot obtain the information of VTO after configuration.

Figure 3-6 Initialize the devices

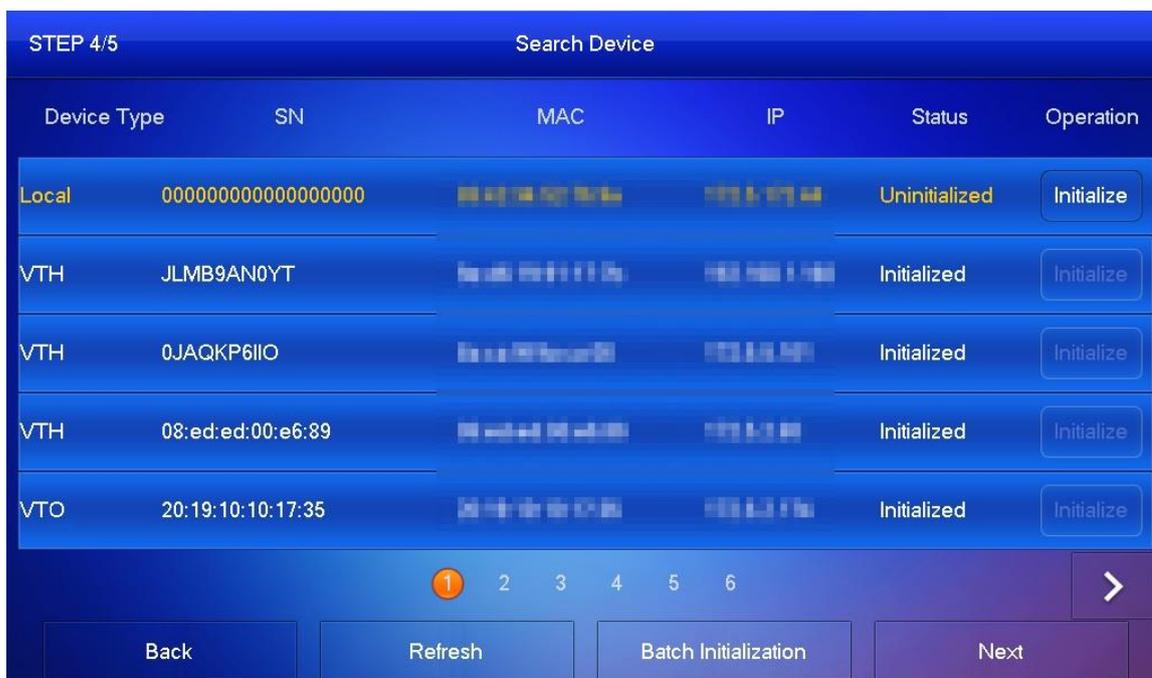

Step 9 Tap **One-key Config** to finish the configuration of the VTO and VTH, as well as the SIP server.
The status bar will suggest whether your configuration is successful.

3.3 Configuring Network Parameters

You can choose to connect to the network either through WLAN or LAN.

3.3.1 WLAN

Step 1 Tap and hold **Setting** for about 3 seconds, and enter the password that you set for the VTH.

Step 2 Tap **Network > WLAN**.

Step 3 Enable OFF to see all the usable networks.

Step 4 Before connecting to a Wi-Fi network, do either of the following first.


- Tap **WireLessIP**, enter local IP, subnet mask and gateway that you plan for the VTH, and then tap **OK**.
- Tap **WireLessIP**, tap OFF to enable the DHCP function to obtain IP information automatically.



To enable the DHCP function, use a router with a DHCP function.

Step 5 On the **WLAN** screen, tap the Wi-Fi name, and then enter password to connect to the network.

Figure 3-7 WLAN

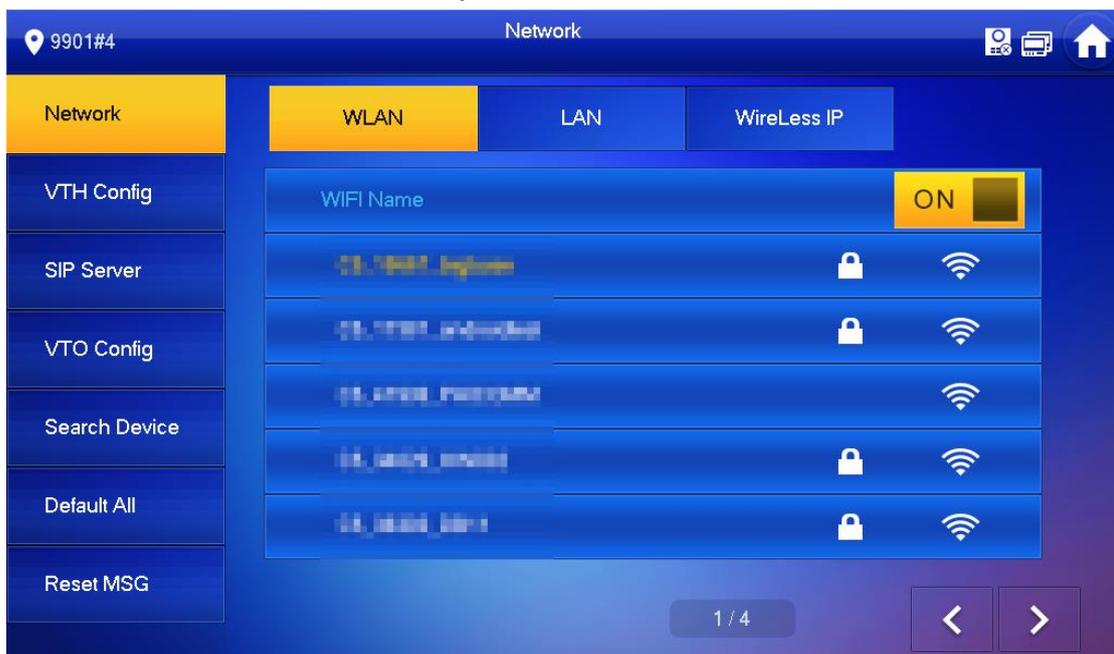

3.3.2 LAN


Step 1 Tap and hold **Setting** for about 3 seconds, and enter the password that you set for the VTH.

Step 2 Tap **Network > LAN**.

Step 3 Enter local IP subnet mask and gateway that you plan for the VTH.

You can also tap OFF to enable the DHCP function to obtain IP information automatically.

Figure 3-8 LAN

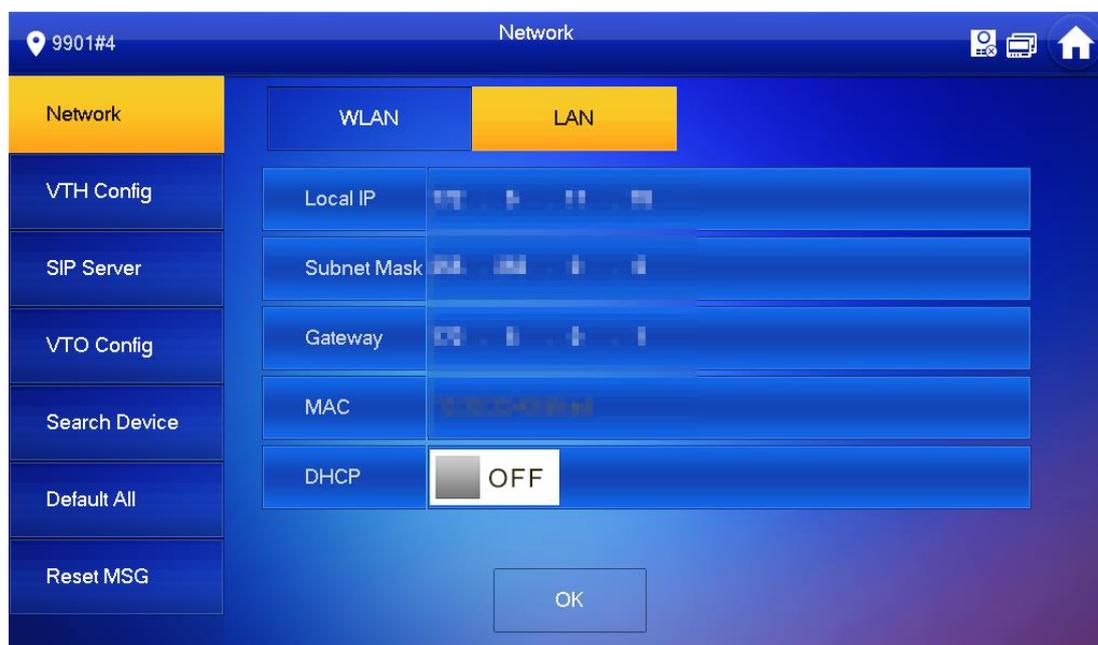


Step 4 Tap **OK**.

3.4 Configuring SIP Server

Step 1 Tap and hold **Setting** for about 3 seconds, and enter the password that you set for the VTH.

Step 2 Tap **SIP Server**.

Figure 3-9 SIP server

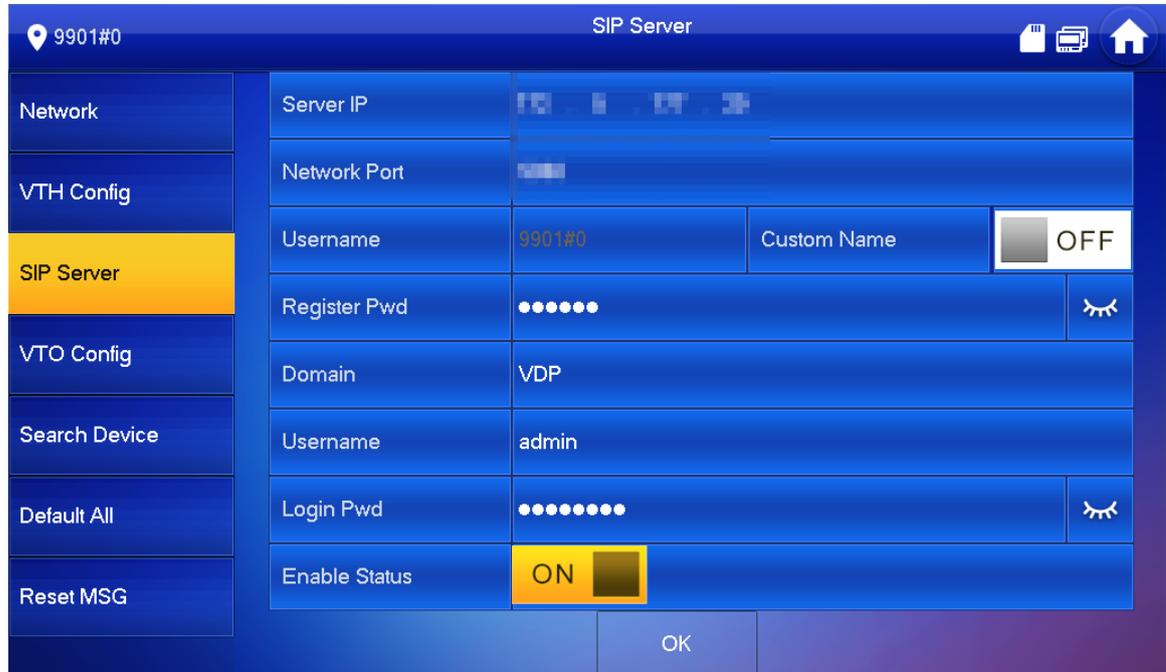

Step 3 Configure the SIP server parameters.

Step 4 Set **Enable Status** to **ON**.

Step 5 Tap **OK**.

Table 3-1 SIP server


Parameter	Description
Server IP	<ul style="list-style-type: none"> When the platform works as SIP server, server IP is the IP address of the platform. When VTO works as SIP server, server IP is the IP address of the VTO.
Network Port	<ul style="list-style-type: none"> When the platform works as SIP server, the network port is 5080. When VTO works as SIP server, the network port is 5060.
Username	Leave it as default.
Register Pwd	
Domain	Registration domain of SIP server, which can be null. When VTO works as SIP server, registration domain of SIP server is VDP.
Username	Username and password to log in to SIP server.
Login Pwd	

3.5 Configuring VTH

Step 1 Tap and hold **Setting** for about 3 seconds, and enter the password that you set for the VTH.

Step 2 Tap **VTH Config**.

Figure 3-10 VTH configuration

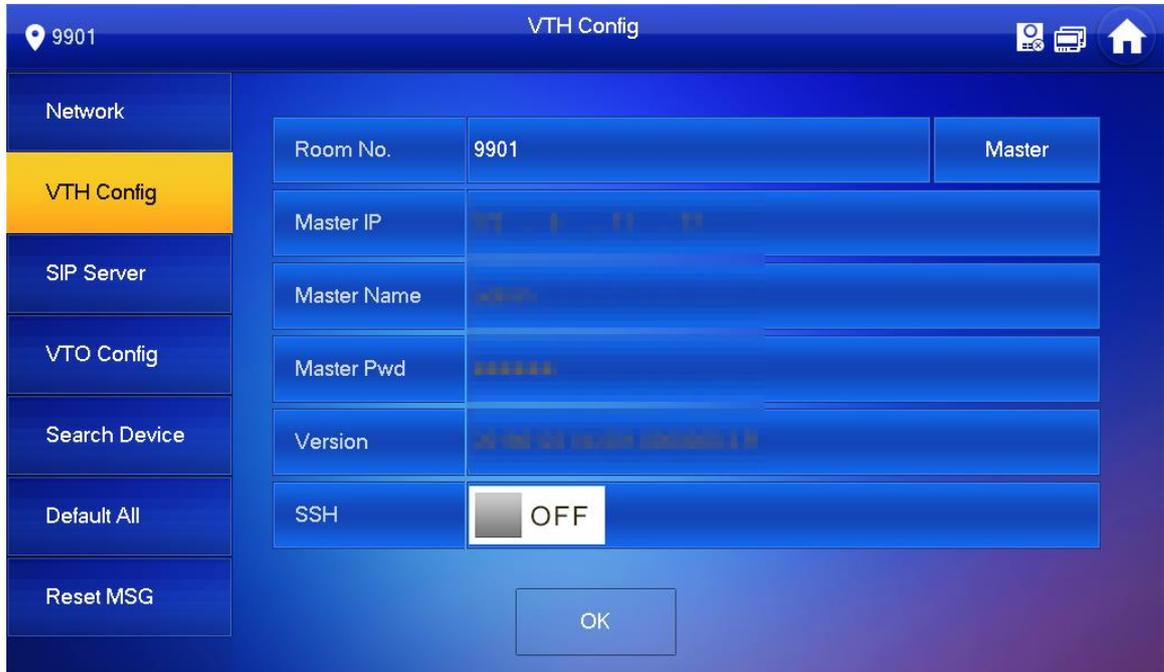

The screenshot shows the VTH Config interface. On the left is a navigation menu with options: Network, VTH Config (highlighted), SIP Server, VTO Config, Search Device, Default All, and Reset MSG. The main area contains the following configuration fields:

Room No.	9901	Master
Master IP	192.168.1.1	
Master Name	VTH	
Master Pwd	*****	
Version	VTH 1.0.0 (Build 2014-11-11)	
SSH	<input type="checkbox"/> OFF	

An OK button is located at the bottom center of the screen.

Step 3 Enter room number (such as 9901 or 101#0).

If there is an extension VTH, room number must end with #0. Otherwise, it will fail to connect to VTO.


Step 4 Tap **OK**.

3.6 Configuring VTO

Step 1 Tap and hold **Setting** for about 3 seconds, and enter the password that you set for the VTH.

Step 2 Tap **VTO Config**.

Figure 3-11 VTO configuration

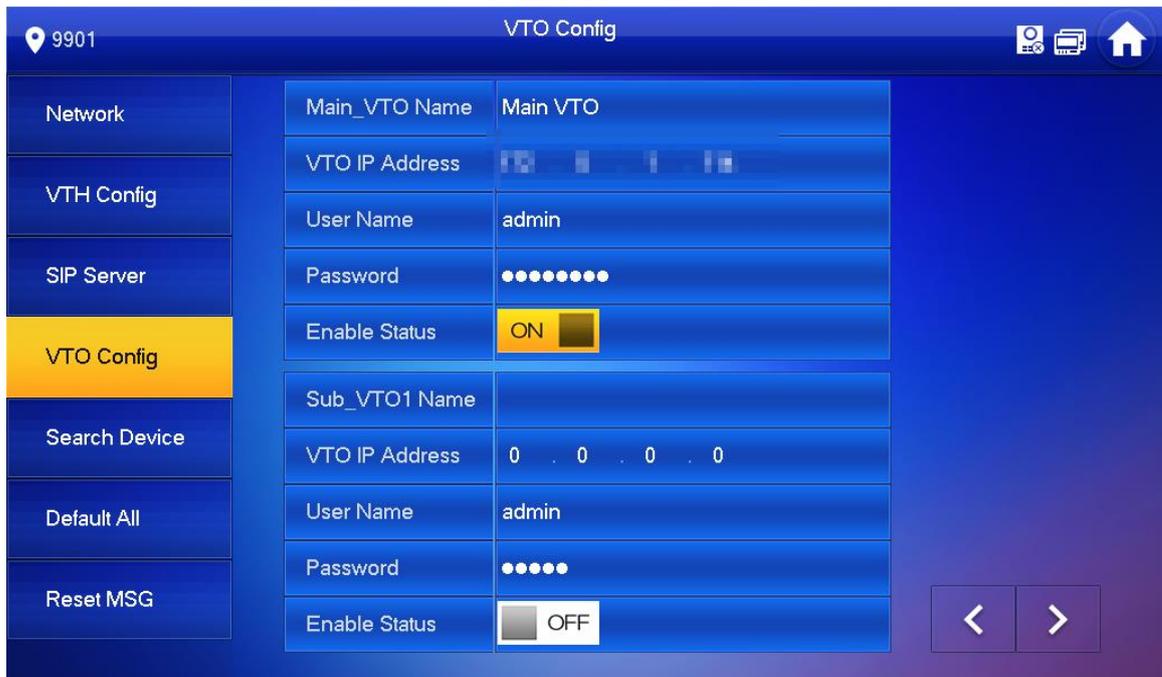

Step 3 Add VTO.

3.6.2 Adding Main VTO

Step 1 Enter main VTO name, VTO IP address, username and password.

Step 2 Set **Enable Status** to **ON**.

Step 3 Check whether the configuration is successful by checking the status bar at the top right corner.

3.6.3 Adding Sub VTO

Step 1 Enter sub VTO name, sub VTO IP address, username, and password.

Step 2 Set **Enable Status** to **ON**.

Step 3 Check whether the configuration is successful by checking the status bar at the top right corner.

4 Commissioning


After the basic configuration is complete, check whether the intercom function can work.

4.1 VTO Calling VTH

Step 1 Dial a room number on the VTO (for example, 9901).

Step 2 Tap  on the VTH to answer the call.

Figure 4-1 Call VTH from VTO

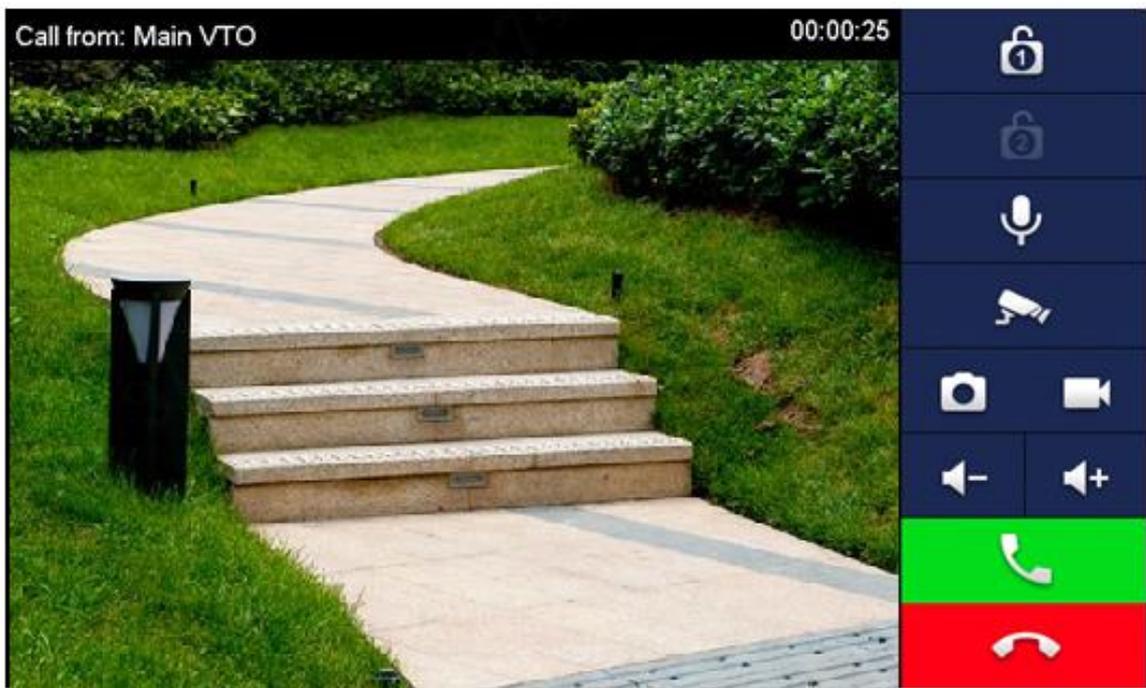

4.2 VTH Monitoring VTO

A VTH can monitor VTO.

Step 1 On the home screen, select **Monitor > Door**.

Step 2 Set the VTO to go to the monitoring page.

Step 3 Tap the icon to view the VTO video.



The following figure means that SD card has been inserted into VTH. If SD card is not inserted, recording and snapshot icons are gray.

Figure 4-2 Door

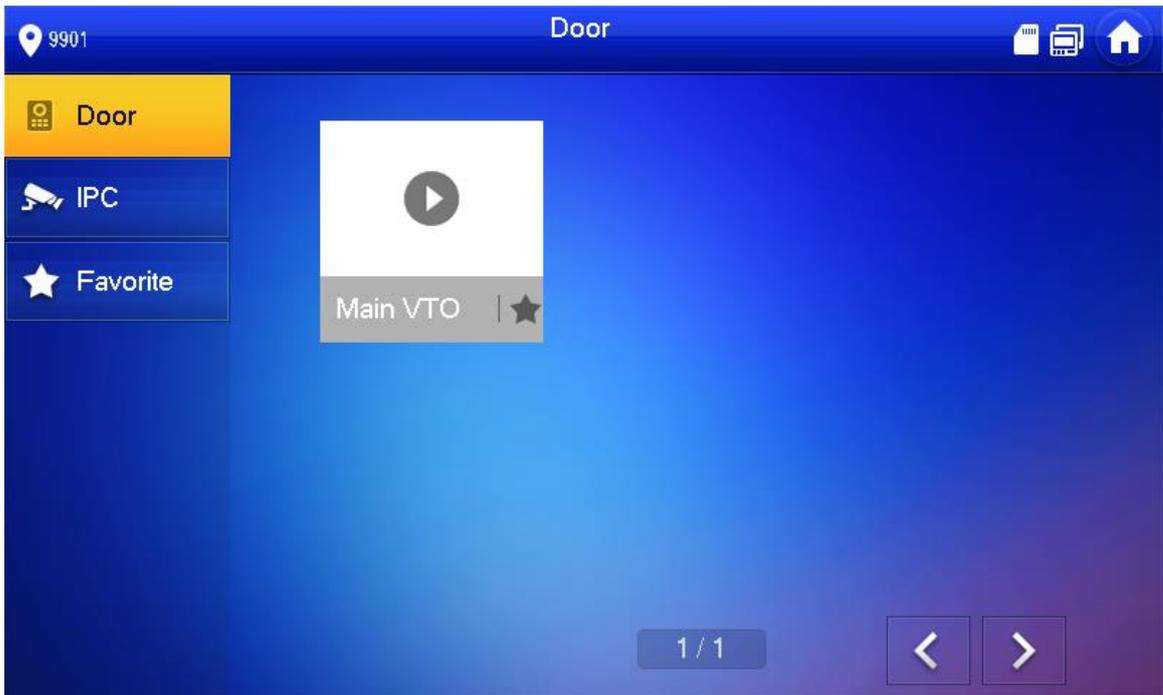


Figure 4-3 Monitoring device



Appendix 1 Cybersecurity Recommendations

Mandatory actions to be taken for basic device network security:

1. Use Strong Passwords

Please refer to the following suggestions to set passwords:

- The length should not be less than 8 characters;
- Include at least two types of characters; character types include upper and lower case letters, numbers and symbols;
- Do not contain the account name or the account name in reverse order;
- Do not use continuous characters, such as 123, abc, etc.;
- Do not use overlapped characters, such as 111, aaa, etc.;

2. Update Firmware and Client Software in Time

- According to the standard procedure in Tech-industry, we recommend to keep your device (such as NVR, DVR, IP camera, etc.) firmware up-to-date to ensure the system is equipped with the latest security patches and fixes. When the device is connected to the public network, it is recommended to enable the "auto-check for updates" function to obtain timely information of firmware updates released by the manufacturer.
- We suggest that you download and use the latest version of client software.

"Nice to have" recommendations to improve your device network security:

1. Physical Protection

We suggest that you perform physical protection to device, especially storage devices. For example, place the device in a special computer room and cabinet, and implement well-done access control permission and key management to prevent unauthorized personnel from carrying out physical contacts such as damaging hardware, unauthorized connection of removable device (such as USB flash disk, serial port), etc.

2. Change Passwords Regularly

We suggest that you change passwords regularly to reduce the risk of being guessed or cracked.

3. Set and Update Passwords Reset Information Timely

The device supports password reset function. Please set up related information for password reset in time, including the end user's mailbox and password protection questions. If the information changes, please modify it in time. When setting password protection questions, it is suggested not to use those that can be easily guessed.

4. Enable Account Lock

The account lock feature is enabled by default, and we recommend you to keep it on to guarantee the account security. If an attacker attempts to log in with the wrong password several times, the corresponding account and the source IP address will be locked.

5. Change Default HTTP and Other Service Ports

We suggest you to change default HTTP and other service ports into any set of numbers between 1024~65535, reducing the risk of outsiders being able to guess which ports you are using.

6. Enable HTTPS

We suggest you to enable HTTPS, so that you visit Web service through a secure communication channel.

7. MAC Address Binding

We recommend you to bind the IP and MAC address of the gateway to the device, thus reducing the risk of ARP spoofing.

8. Assign Accounts and Privileges Reasonably

According to business and management requirements, reasonably add users and assign a minimum set of permissions to them.

9. Disable Unnecessary Services and Choose Secure Modes

If not needed, it is recommended to turn off some services such as SNMP, SMTP, UPnP, etc., to reduce risks.

If necessary, it is highly recommended that you use safe modes, including but not limited to the following services:

- SNMP: Choose SNMP v3, and set up strong encryption passwords and authentication passwords.
- SMTP: Choose TLS to access mailbox server.
- FTP: Choose SFTP, and set up strong passwords.
- AP hotspot: Choose WPA2-PSK encryption mode, and set up strong passwords.

10. Audio and Video Encrypted Transmission

If your audio and video data contents are very important or sensitive, we recommend that you use encrypted transmission function, to reduce the risk of audio and video data being stolen during transmission.

Reminder: encrypted transmission will cause some loss in transmission efficiency.

11. Secure Auditing

- Check online users: we suggest that you check online users regularly to see if the device is logged in without authorization.
- Check device log: By viewing the logs, you can know the IP addresses that were used to log in to your devices and their key operations.

12. Network Log

Due to the limited storage capacity of the device, the stored log is limited. If you need to save the log for a long time, it is recommended that you enable the network log function to ensure that the critical logs are synchronized to the network log server for tracing.

13. Construct a Safe Network Environment

In order to better ensure the safety of device and reduce potential cyber risks, we recommend:

- Disable the port mapping function of the router to avoid direct access to the intranet devices from external network.
- The network should be partitioned and isolated according to the actual network needs. If there are no communication requirements between two sub networks, it is suggested to use VLAN, network GAP and other technologies to partition the network, so as to achieve the network isolation effect.
- Establish the 802.1x access authentication system to reduce the risk of unauthorized access to private networks.
- Enable IP/MAC address filtering function to limit the range of hosts allowed to access the device.