




## HiVi M300 Multimedia Active Speaker Manual

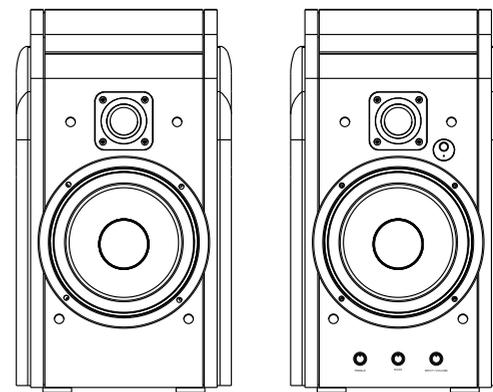

---

Due to the reasons in the change of design or others, product information contained here may not be in conformity with product itself. We reserve the right of no prior notice before change.

---


HiVi USA HiVi Acoustics, Inc.  
11630 Goldring Road, Arcadia, CA 91006, USA  
Tel:+1 626 930 0606 Fax:+1 626 930 0609 <https://swanspeakers.com>




## Maintenance




a)




b)



c)



d)



e)

- a) Avoid magnetic disturbance.
- b) Do not place under the sunshine for a long time.
- c) Do not place in high temperature or moist environment for a long time.
- d) Do not touch the drivers with your hands.
- e) Avoid corrosive liquids and gases.

## Trouble Shooting

1. If there is problem with sound quality.
  - a) Check if all the drivers are working.
  - b) Check that audio cables are firmly connected at both ends.
2. If there is no sound from either of the speakers:
  - a) Check if the device is on and if a source is playing.
  - b) Check if the volume is not on minimum.
  - c) Check if there is broken or short circuit with the cable connecting speakers and audio source.
3. If there is no sound coming from one of the speakers:
  - a) Check the setting of the audio source.
  - b) Check that all the audio cable are firmly connected at both ends.

## Warning

### IMPORTANT SAFETY INSTRUCTIONS

#### WARNING

To reduce the risk of fire or electric shock, do not expose this apparatus to rain or moisture.



The lightning flash is intended to alert you to the presence of uninsulated “dangerous voltage” within the product’s enclosure that may be of sufficient magnitude to constitute an electric shock to persons.



The exclamation point is intended to alert you to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.

Before connecting or using this apparatus, do read carefully all safety warning and instructions. Please keep this instruction for future reference.

This device should be installed or set up in a position that ventilation can be assured. Never put the device in a place that air flow over the ventilation openings might be hindered, such as in a bookshelf or a drawer.

This product should be operated only from the type of power source indicated on the back panel of the device. The power cord of this product should be restored in a place that is less possibly be walked on or get pierced, especially its plug, convenience receptacles and the point where power cord exit from the apparatus.

Before cleaning this product, make sure the plug is disconnected from the outlet. Proceed with the cleaning in the way that this instruction recommends only.

When this product is not in use for a long time, make sure to unplug the power cord from the AC outlet.

If below problem happens, send this product to a qualified service personnel for repairing.

- A. Power cord or power plug is damaged.
- B. Objects have fallen or liquid has been spilled into this product.
- C. This product is exposed to rain or other liquid.
- D. This product functions abnormally or very poorly.
- E. This product has been dropped or has a damaged enclosure.

Never to attempt to repair this product by yourself. Refer all servicing to a qualified servicing personnel.

#### CAUTION

To reduce the risk of electric shock, the power plug must be completely inserted into an AC outlet.

This product does not contain any parts or components that can be repaired by users themselves. Do not open the enclosure, otherwise it may result in an electric shock. Refer all servicing to a qualified servicing personnel.

When you unplug this product from AC outlet, do hold the power plug and pull.

Do not pull the power cord. Do not overload AC outlets or the extension cord, as this can lead to risk of fire or electric shock.

## Warning

---

When repairing or replacement of parts is required, make sure the service technician has used the parts/components specified by the manufacturer or parts/components that have the same characteristics as the original parts/components. Unauthorized substitutions may result in risk of fire, electric shock or other hazards.

### POWER SOURCE

Before connecting this product with AC outlet, do check and make sure the electric supply voltage is as same as it is marked on the rear panel of this product.

**WARNING: It's very dangerous to insert a power plug that has bare wire into an AC outlet.**

### DECLARATION

**This product does not contain any parts or components that can be repaired by users themselves. If there is any malfunction, refer to this instruction or ask for repair by a qualified service technician. Do not try to repair by yourself, otherwise the manufacturer will not be responsible for any consequences resulted there from.**

## FCC Warning

---

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

### NOTE 1:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:- Reorient or relocate the receiving antenna.

-Increase the separation between the equipment and receiver.

-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

-Consult the dealer or an experienced radio/TV technician for help.

### NOTE 2:

Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

## Specifications

---

Model	HiVi M300
Series	Professional DSP 2.0 multimedia speaker system
System Type	2-way 4th-order vented box system
Drivers Configuration	Professional 6.5" midbass driver; 1.1" dome tweeter
Frequency Range	38Hz - 20kHz $\pm$ 3dB(Free Space)
Harmonic Distortion	65Hz - 20kHz $\leq$ 1% (85dB/1m)
Audio Input	AUX/Bluetooth/Optical/Coaxial
Rated Power	120W RMS/Channel ; 240W RMS/Dual Channels
Crossover Point	3.0kHz
Separation	>65dB
SNR	>95dB (Unweighted)
Input Sensitivity	350mV
Input Impedance	22k $\Omega$
Maximum Input	3000mV
Finish	Black matte cabinet with PVC coated side panels
Dimensions(WXDXH)	8.9"×10.3"×15.8"
Net Weight	Master Speaker:27.1lbs Slave Speaker:18.3lbs

## Break-in


---

Break-in is the procedure which can enable the speakers to perform best acoustically. A period ranging from 48-100 hours of usage is recommended before both the amplifier and speaker drivers behave optimally.


Alternatively, you can listen 2 or 3 hours every day at a medium volume, and the speakers will be broken-in one month or so.

## Bluetooth Connection

Select Bluetooth mode via a remote control or press INPUT/VOLUME control on the front panel. Indicator light should flash blue. Choose HiVi M300. Steady blue light indicates successful Bluetooth connection.


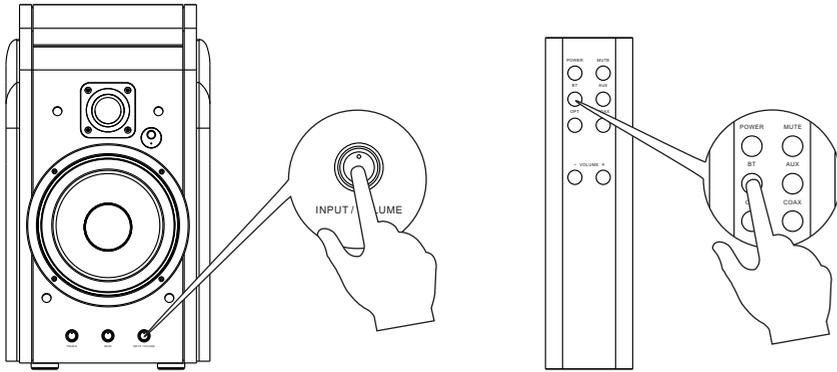


## Speaker Placement

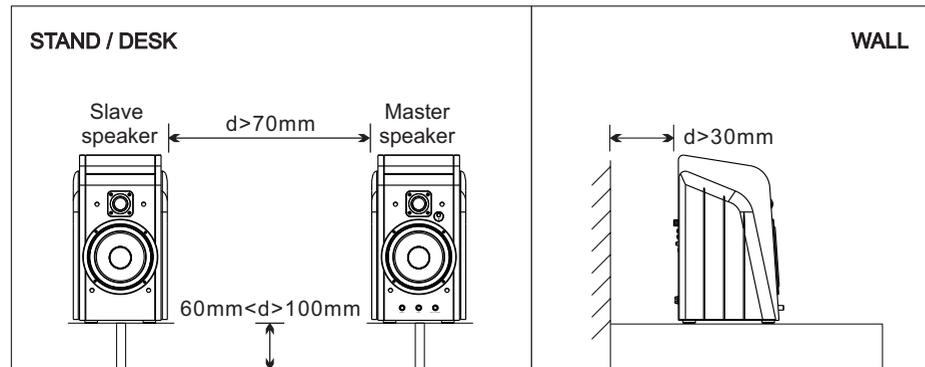


## Unpacking & Schematic Diagram


Please make sure all the following components are in the box.

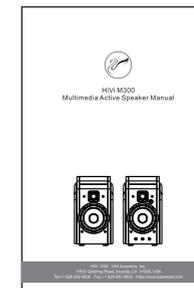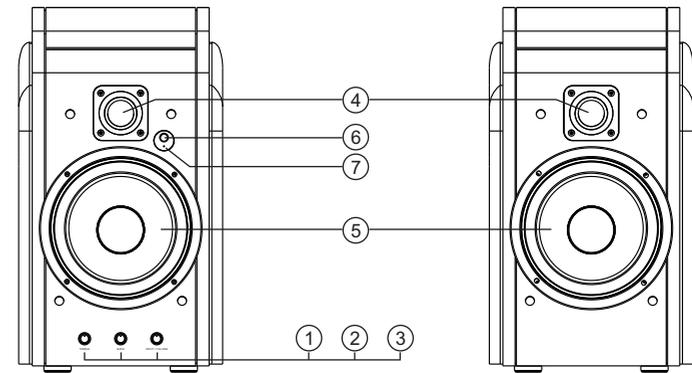

Manual

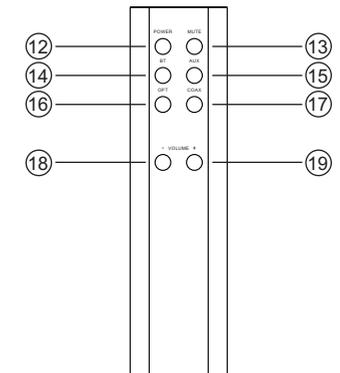

## Unpacking & Schematic Diagram

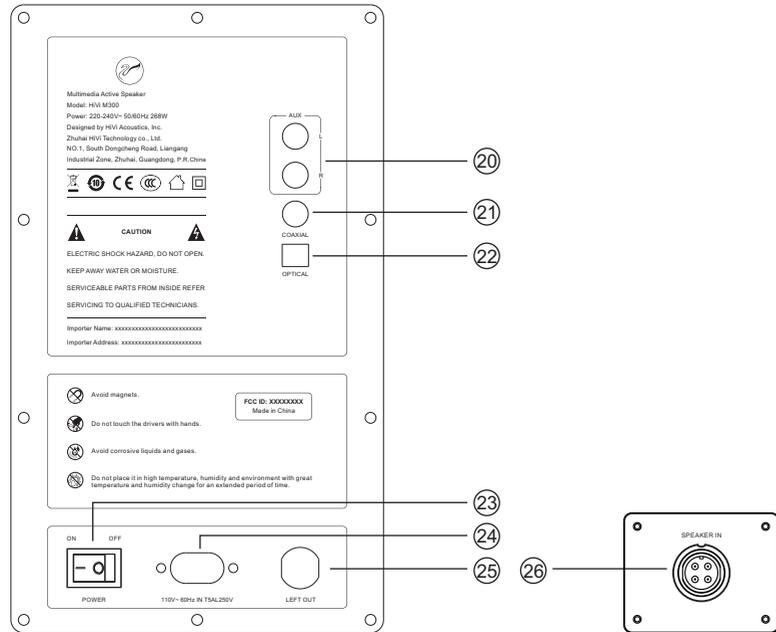

1. Treble Control:  $\pm 3\text{dB}$ ; clockwise  $+3\text{dB}$ , counterclockwise  $-3\text{dB}$
2. Bass Control:  $\pm 3\text{dB}$ ; clockwise  $+3\text{dB}$ , counterclockwise  $-3\text{dB}$
3. Volume/Source Control: Turn clockwise to increase the volume.  
Press repeatedly to cycle through the available modes (AUX, Bluetooth, ...)



- |             |                    |
|-------------|--------------------|
| 4. Tweeter  | 5. Woofer          |
| 6. Receiver | 7. Indicator Light |

- |                   |                                  |
|-------------------|----------------------------------|
| 8. Power Cable    | 9. Dual RCA to 3.5mm Audio Cable |
| 10. Optical Cable | 11. Speaker Connecting Cable     |

- |                                  |                                  |
|----------------------------------|----------------------------------|
| 12. Power                        | 13. Mute (Red Light)             |
| 14. Bluetooth Input (Blue Light) | 15. Aux Input (Sky Blue Light)   |
| 16. Optical Input (White Light)  | 17. Coaxial Input (Purple Light) |
| 18. Volume Down                  | 19. Volume Up                    |

- |                       |                       |
|-----------------------|-----------------------|
| 20. Aux Interface     | 21. Coaxial Interface |
| 22. Optical Interface | 23. Power Switch      |
| 24. Power Socket      | 26. LEFT Out          |
| 27. Speaker In        |                       |

## Speaker Connection

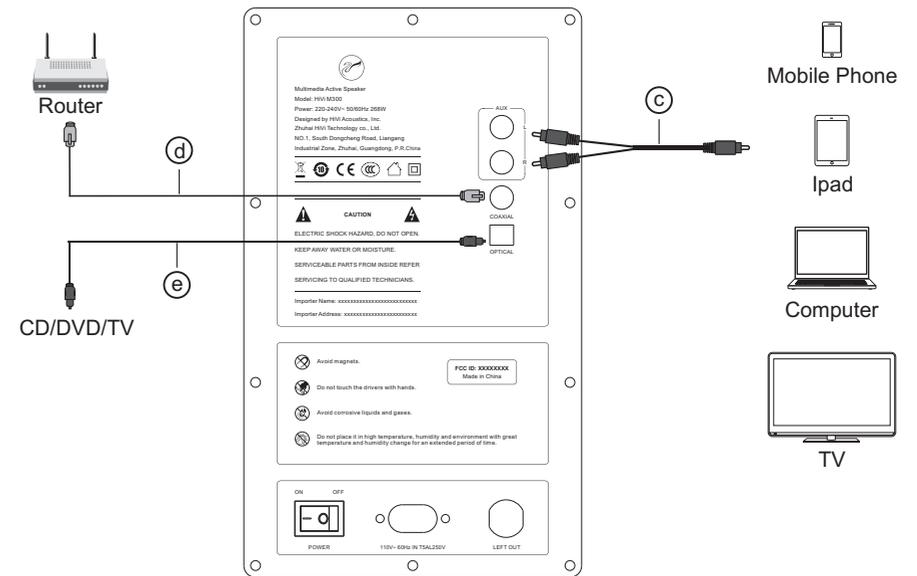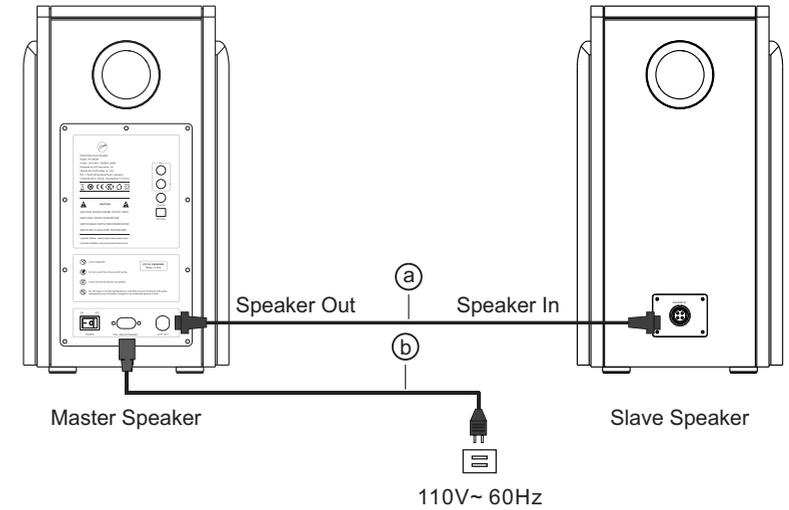

- a) Connection between speakers.
- b) Speaker connection with power.
- c) Speaker connection with computers, TV and tablets etc.
- d) Speaker connection with router.
- e) Optical connection with CD/DVD/TV.