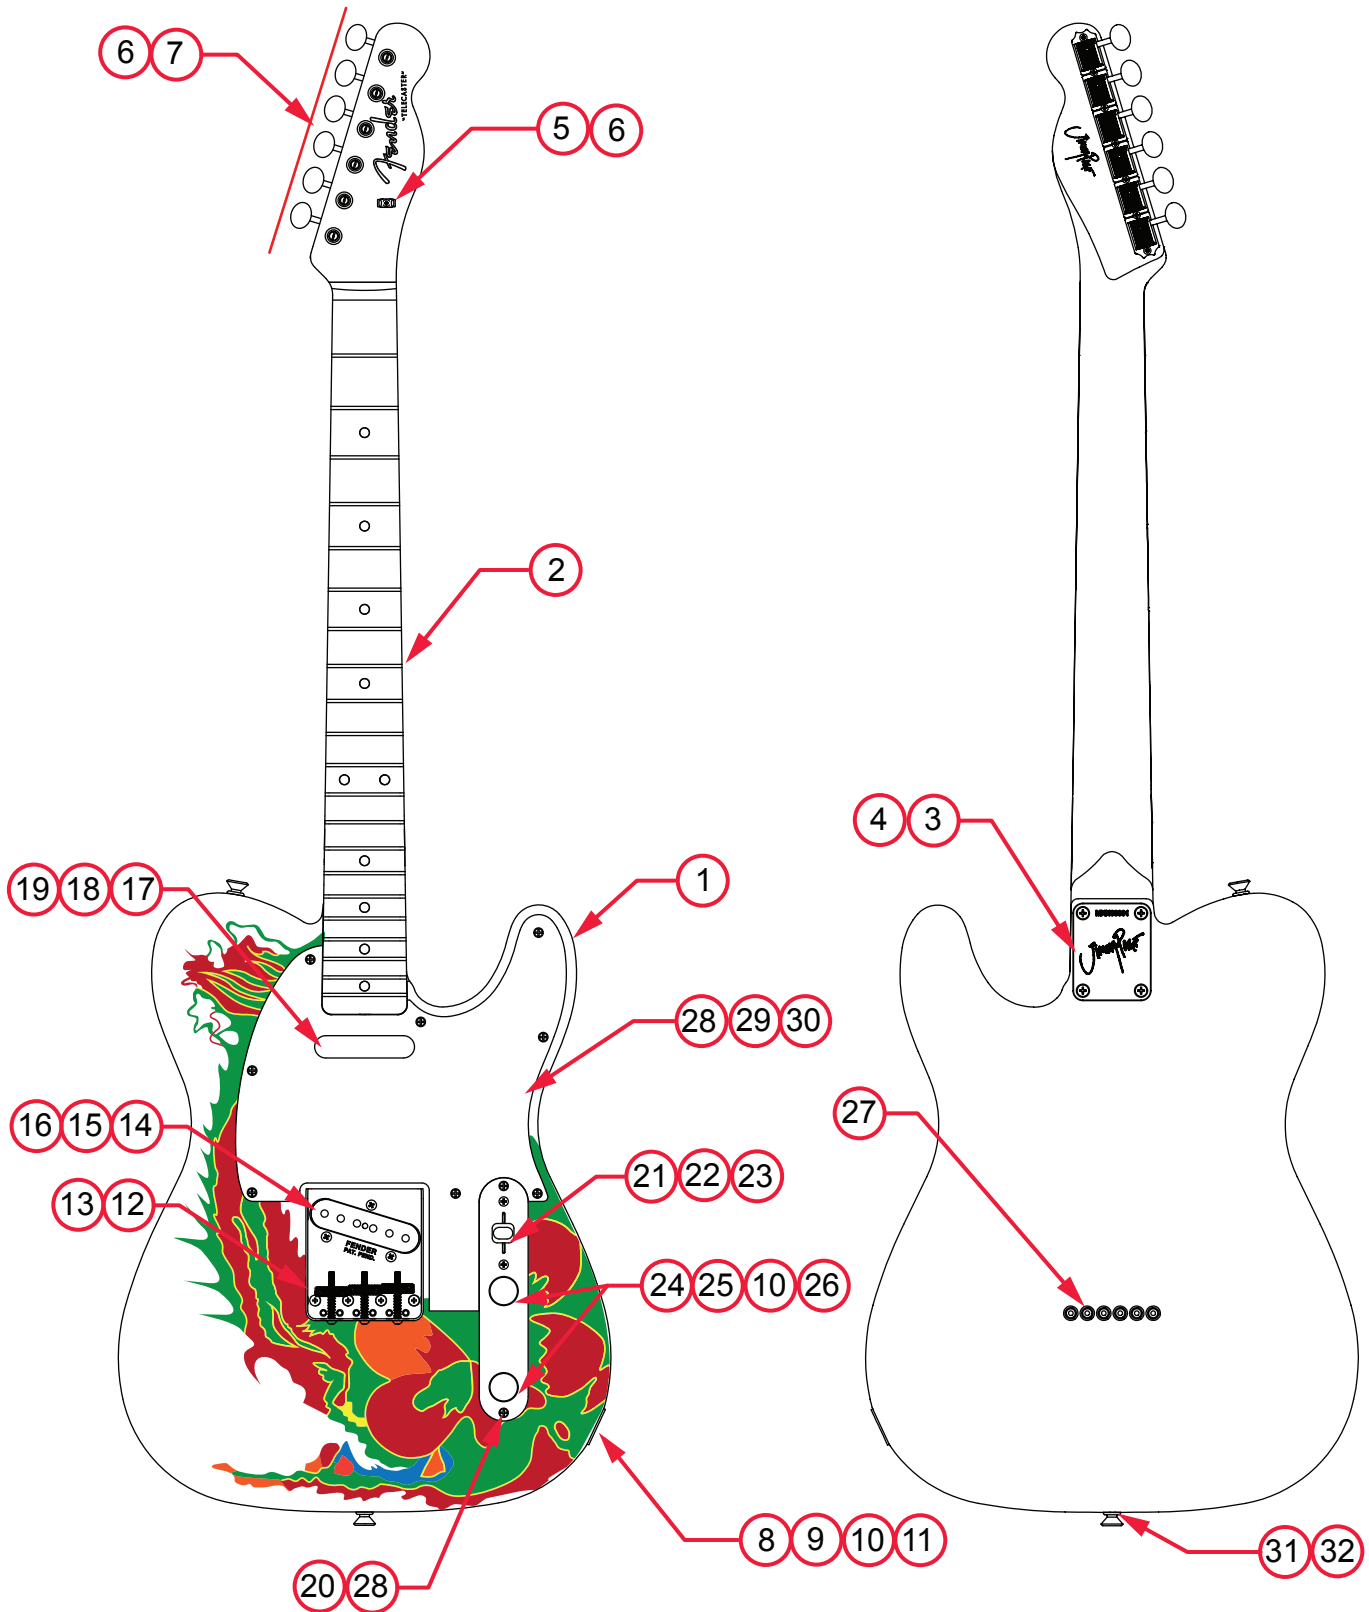


JIMMY PAGE TELECASTER®

(014-6230-XXX)

PARTS LAYOUT

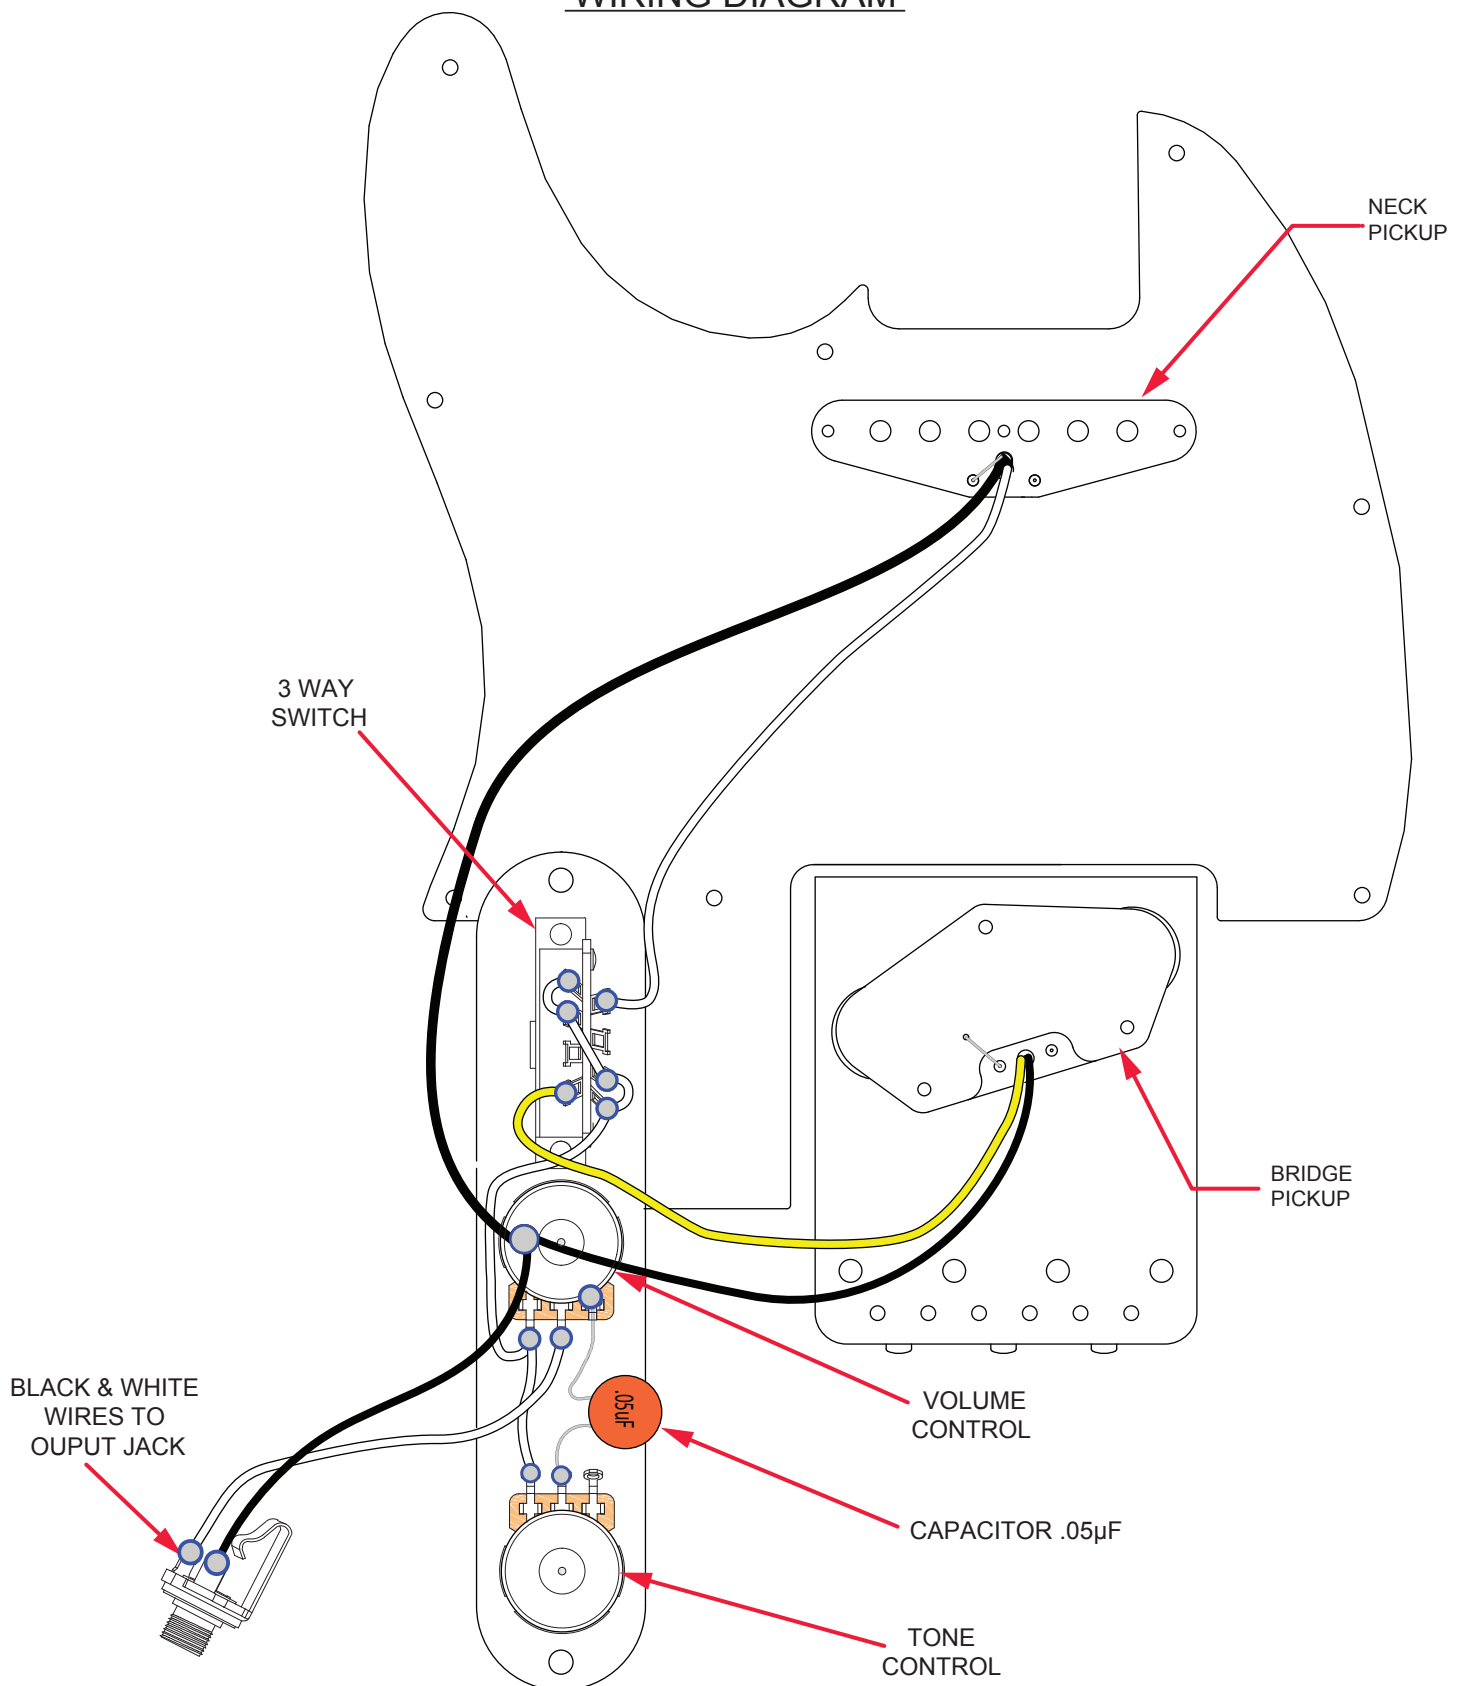


JIMMY PAGE TELECASTER®**(014-6230-XXX)****PARTS LIST**

REF #	DESCRIPTION	PART NUMBER
1	BODY 50s TELE ASH JIMMY PAGE PRNTD	0096115521
2	NECK TELE RW JIMMY PAGE RELIC	7715235000
3	PLATE NECK JIMMY PAGE S/N	7715960000
4	SCRW SMA 8x1-3/4 OHP NI	0015636049
5	ORIGINAL TELE STRING GUIDE	0994912000
6	SCRW SMAB 3x3/8 RHP NI	0011357049
7	KEYS, VINT SET PING NKL W/BUSHINGS	0047912049
8	JACK PHONE 1/4 - OUTPUT	0047329049
9	FERRULE JACK STD TELE TUMBLE	0021452004
10	NUT HEX 3/8-32x3/32 TK NI	0016352049
11	WSHER LCK INTL 3/8x.687x.065 NI	0016436000
12	BRIDGE CUSTOM TELE W/ BRIDGE PLATE KR	7715214000
13	SCRW WOOD 6x1 OHP NI	0016188049
14	PICKUP ASSY CUSTOM 59 TELE BRIDGE	7716109000
15	SCRW 6-32X3/4 RHP TAPTRI L NI	0048631049
16	TUBING LATEX CUT .425 x 1/8	0039409000
17	PICKUP ASSY CUSTOM 59 TELE NECK MEX	7716110000
18	SCRW WD RND HD 3 X 1 NI	0016295049
19	TUBING LATEX CUT .550 x 1/8	0039410000
20	ORIG VINT TELE CONTROL PLATE	0992058000
21	ORIG.TELE "TOP HAT" SWITCH TIP	0994937000
22	ORIG 3-WAY SWITCH VNT STR/TEL	0992041000
23	PICKUP/SWITCH SCREWS	0994925000
24	ORIG T/V CNTRL 250K SOLID SHFT	0990831000
25	WSHR LCK INTL 3/8x.500x.020 NI	0022384049
26	KNOB KNURLED CHROME	0991366000
27	AM SRS TELE FERRULES	0994917000
28	SCRW SMAB 4x1/2 OHP NI	0015578049
29	PICKGUARD .060 POLYCARBONATE	7715046000
30	MIRROR PAPER JIMMY PAGE PICKGUARD	7716457000
31	ORIGINAL STRAP BUTTONS	0994915000
32	SCRW SMAB 5x1 OHP NI	0015610049



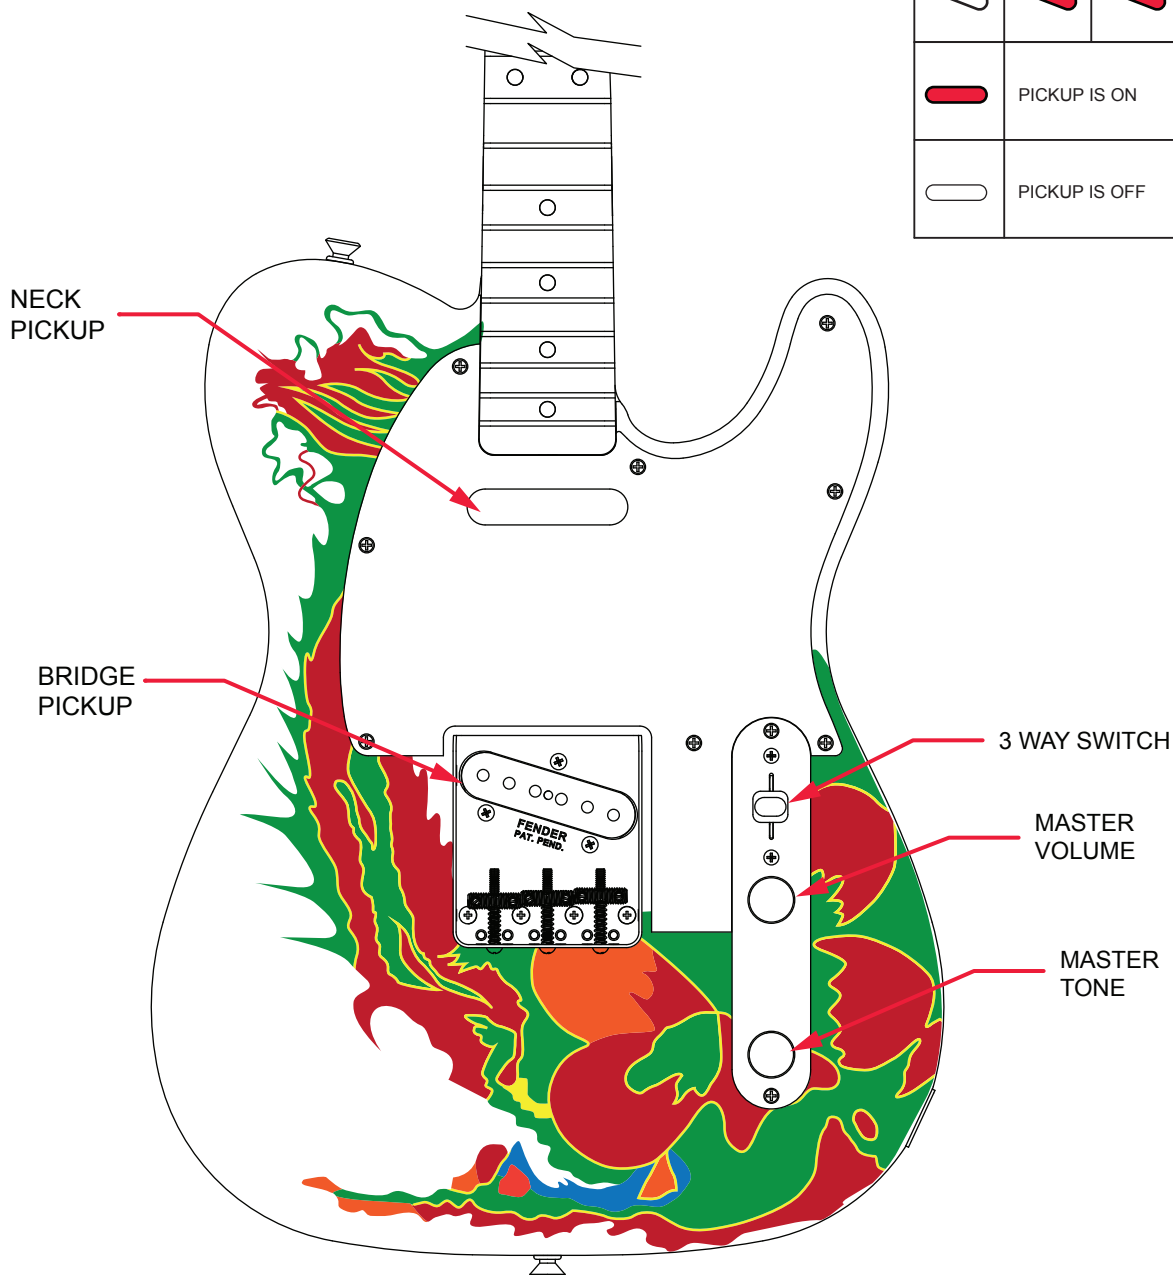
JIMMY PAGE TELECASTER®
(014-6230-XXX)
WIRING DIAGRAM



JIMMY PAGE TELECASTER® (014-6230-XXX)

SWITCH AND CONTROL FUNCTION

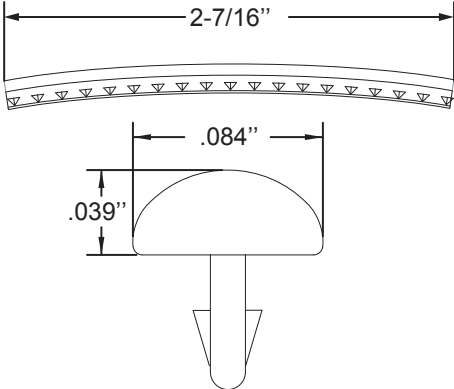
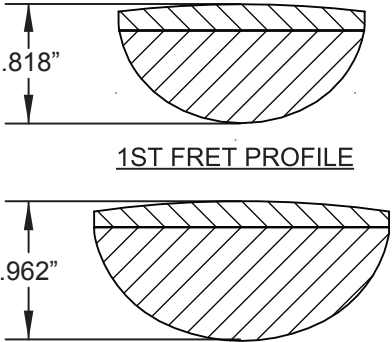
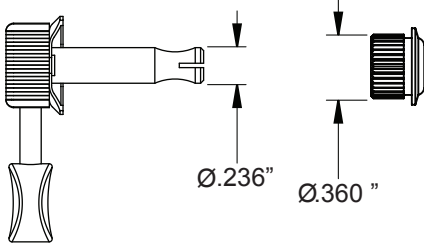
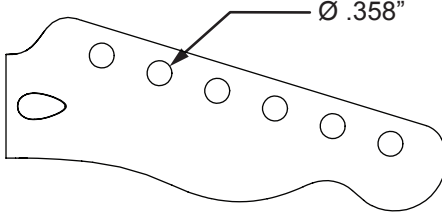
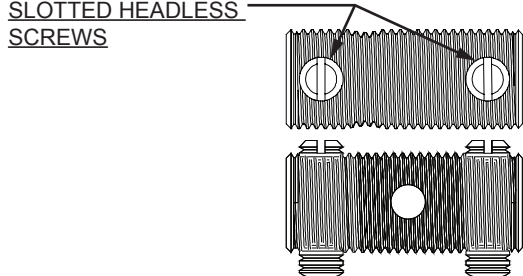
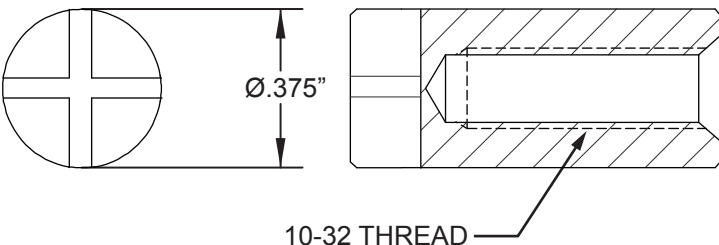
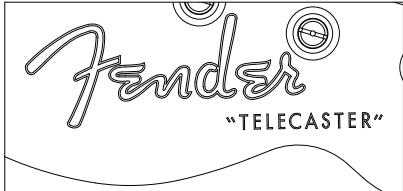
3 WAY SWITCH POSITION			
 3	 2	 1	← 3 WAY SWITCH POSITION
			← NECK PICKUP
			← BRIDGE PICKUP
	PICKUP IS ON		INDICATES POSITION OF 3 WAY SWITCH 
	PICKUP IS OFF		



JIMMY PAGE TELECASTER®

(014-6230-XXX)

ADDITIONAL SPECIFICATION DETAIL

<u>FRET SIZE: VINTAGE</u> (FRET DIMENSIONS ARE BEFORE INSTALLATION) 		PLEASE NOTE: AS EACH NECK IS SANDED & FINISHED BY HAND, THICKNESS DIMENSIONS MAY VARY SLIGHTLY FROM THOSE SHOWN.		<u>NECK PROFILE:</u> <u>JIMMY PAGE "CUSTOM OVAL C"</u>  1ST FRET PROFILE 12TH FRET PROFILE													
<u>KEY, VINT ST PING. P/N 0047912000</u> <u>BUSHING KEY VINT PING P/N 0053020000</u> 		<u>TUNING MACHINE THRU-HOLE</u> <u>INNER DIAMETER .358 "</u> 															
<u>SADDLE HEIGHT ADJUSTMENT WRENCH:</u> <u>FLAT HEAD SCREWDRIVER</u> <u>SLOTTED HEADLESS SCREWS</u> 		<u>TRUSS ROD NUT P/N 0012252000</u> 															
<u>LOGO: DECAL FENDER SILVER TELECASTER</u> <u>DECAL JIMMY PAGE SIGNATURE</u> <u>APPLIED UNDER THE FINISH</u>  		<u>PICKUP SPECIFICATIONS</u> <table><tr><th>POSITION</th><th>MAGNETS</th><th>DC RESISTANCE</th><th>POLARITY</th></tr><tr><td>NECK</td><td>ALNICO 5 UNBEVELED</td><td>7.4 - 8.0KΩ</td><td>NORTH</td></tr><tr><td>BRIDGE</td><td>ALNICO 5 UNBEVELED</td><td>6.5 - 7.1KΩ</td><td>NORTH</td></tr></table>				POSITION	MAGNETS	DC RESISTANCE	POLARITY	NECK	ALNICO 5 UNBEVELED	7.4 - 8.0KΩ	NORTH	BRIDGE	ALNICO 5 UNBEVELED	6.5 - 7.1KΩ	NORTH
POSITION	MAGNETS	DC RESISTANCE	POLARITY														
NECK	ALNICO 5 UNBEVELED	7.4 - 8.0KΩ	NORTH														
BRIDGE	ALNICO 5 UNBEVELED	6.5 - 7.1KΩ	NORTH														