



# EXO Sondes

BEST-IN-CLASS PLATFORM FOR THE HIGHEST-QUALITY DATA



**YSI.com/EXO**

# When only the best will do.

EXO is the premium water quality monitoring platform in the world.

## The unmatched benefits of **EXO** include:



## Highest Data Quality

Onboard monitoring systems verify sensor operation



Industry-leading  
Anti-fouling  
Best-in-class anti-fouling  
wiper technology



## Smart QC™



## Titanium Components

The toughest grade parts  
guarantee operation well into  
the future



## Digital Smart Sensors

Auto-recognition of any sensor in any port



# A Smart, Field-Ready Water Monitoring Platform

# Best-In-Class Sonde Platform




Cable connector, battery valve, and expansion port on EXO2



Smart ports accept any sensor, or central port may be used for anti-fouling wiper



Anti-fouling wiper cleans sensor faces, minimizing maintenance and maximizing length of deployment

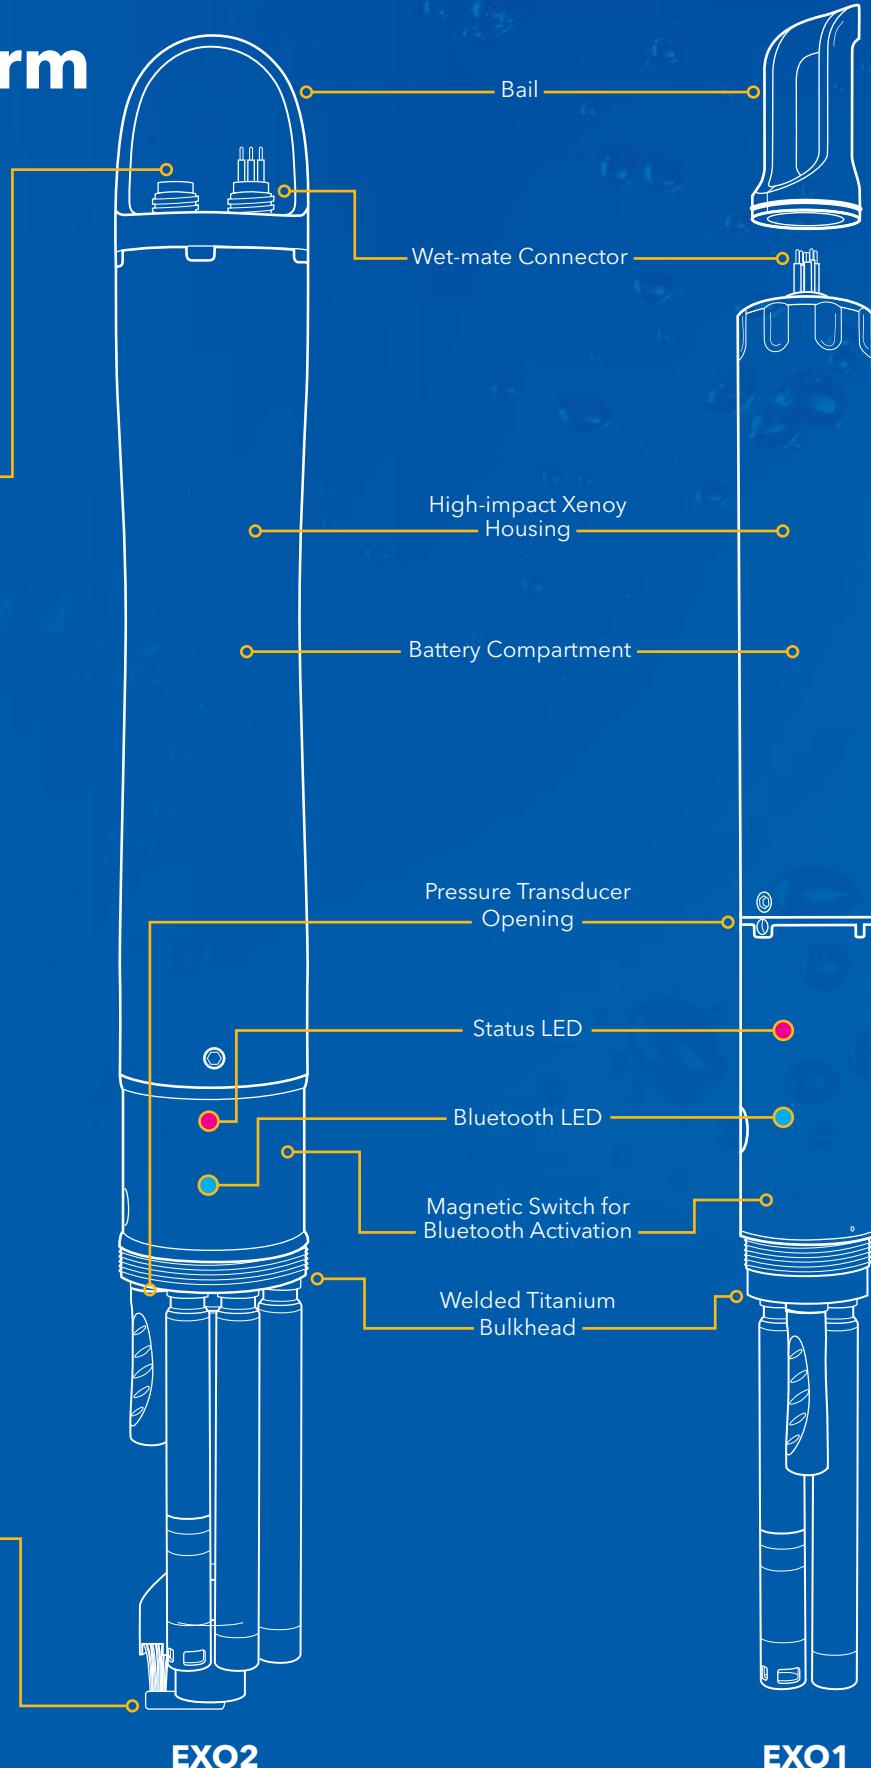

## Selection Guide

	EXO1	EXO2	EXO2 <sup>s</sup>	EXO3
<b>Smart Ports</b>	4	7	7	5
<b>Battery Type</b>	2 D-cell	4 D-cell	External Power	2 D-cell
<b>Battery Life</b>	90 days*	90 days*	N/A	60 days*
<b>Dimensions</b>	Length: 64.77 cm Diameter: 4.70 cm	Length: 71.10 cm Diameter: 7.62 cm	Length: 47.00 cm Diameter: 7.62 cm	Length: 58.67 cm Diameter: 7.62 cm
<b>Weight (fully loaded)</b>	1.42 kg	3.60 kg	1.10 kg	2.00 kg
<b>SDI-12</b>	with Adapter	with Adapter	with Adapter	Integral
<b>Vented Level</b>	✓	✓		
<b>Wiper</b>		✓	✓	✓
<b>Auxiliary Port</b>		✓	✓	

\*Battery life will depend on the type of sensors and measurement frequency. Specifications indicate typical performance and are subject to change. Please check [YSI.com/EXO](http://YSI.com/EXO) for up-to-date information.

## Sonde Specifications

Sondes	
Operating Temperature	-5 to 50°C
Storage Temperature	-20 to 80°C (may differ for sensors)
Depth Rating	0 to 250 m
Communications	Computer Interface: Bluetooth wireless technology, RS-485, USB Output Options: USB with signal output adapter (SOA); RS-232 & SDI-12 with DCP-SOA; Modbus & RS-485 with Modbus-SOA
Sample Rate	Up to 4 Hz
Data Memory	512 MB total memory; >1,000,000 logged readings
Warranty	2 years

**EXO Sondes are perfect for long-term deployments. Daisy-chain multiple sondes for measurements at various depths.**




# Monitoring Made Mobile



## EXO GO

**EXO GO** uses Bluetooth to connect any Windows OS device to a submerged **EXO Sonde**.

Pair with a tablet or laptop and leverage the full power of **KorEXO Software** for your monitoring applications.

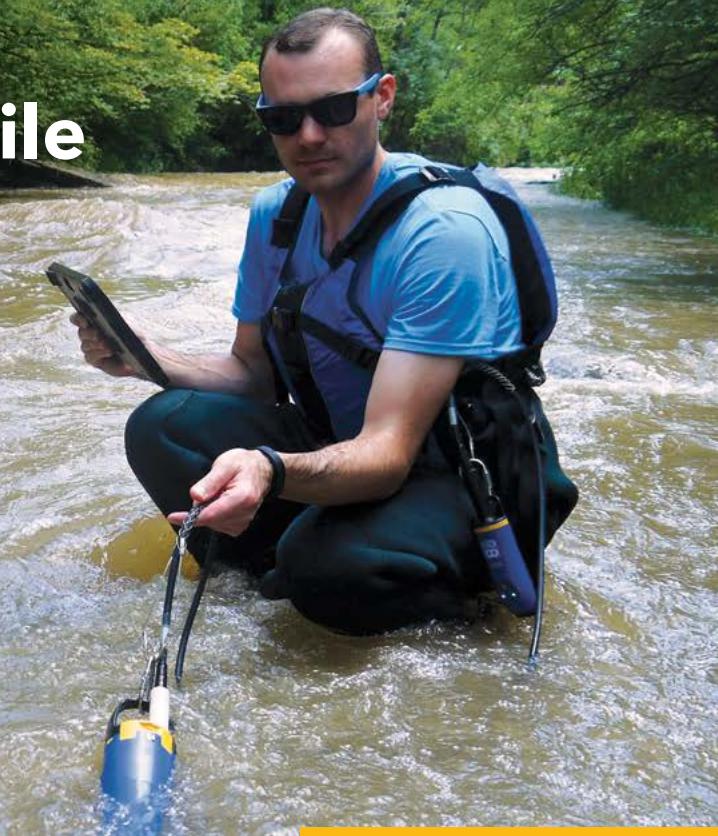

## EXO Handheld

The **EXO Handheld** offers a dedicated, streamlined interface to **EXO Sondes**.

Convenient monitoring is achieved with a backlit color display, ergonomic design, and simple operation.

Choose **EXO GO** for the flexibility of monitoring with any Windows OS device and access to the full features of KorEXO Software. EXO GO cuts out the middleman and delivers data directly to your PC!



### KorEXO Software

Bring the full power of KorEXO to your site with any Windows OS portable device

### Bluetooth Communication

Keep your sonde in the water while you view data in real time, download files, or adjust deployment settings on the GO

	EXO GO	EXO Handheld
USB Connectivity	✓	✓
Bluetooth Connectivity	✓	✓
IP-67 Rating	✓	✓
Display		✓
Onboard Memory		✓
Operating Temperature	-5 to 50°C	0 to 50°C
Storage Temperature	0 to 45°C	0 to 45°C
Dimensions	17.4 x 5.2 x 3.5 cm	8.3 x 21.6 x 5.6 cm
Weight	240 g	567 g
Warranty	1 year	3 year meter, 1 year battery



### GPS Tagging


Georeference data sets using GPS

	Common Features
GPS	Accuracy: 2.5 m CEP (dependent on site conditions)
Barometer	Range: 375 to 825 mmHg Accuracy: +/-1.5 mmHg Resolution 0.1 mmHg
Battery	Operating Time: >15 hours Charging Time: 9 hours



### Simplified Interface

Lower the learning curve of collecting high-quality data with a simplified user interface and integrated help screens



### Transfer Data

Quickly transfer collected data sets and calibration records to a USB flash drive with the push of a button



### Lithium-Ion Battery

Collect more samples with the long-lasting, rechargeable battery

EXO Handheld

Common Feature

# Smart Sensor Suite

A dynamic range of sensors for multiparameter applications



CENTRAL WIPER



EXO sondes feature universal smart ports for sensor installation

## Sensors Not Shown

- CONDUCTIVITY / TEMPERATURE (NON-WIPED)
- TOTAL ALGAE-PE
- AMMONIUM ISE
- CHLORIDE ISE
- NITRATE ISE
- pH
- RHODAMINE

## Sensor Specifications

Sensor	Range	Resolution <sup>1</sup>	Accuracy <sup>2</sup>
Conductivity (Non-Wiped)	0 to 200 mS/cm	0.0001 to 0.01 mS/cm	±0.5% of reading or 0.001 mS/cm, w.i.g. (0-100 mS/cm) ±1% of reading (100-200 mS/cm)
	-5 to 50°C	0.001°C	±0.01°C (-5 to 35°C) ±0.05°C (35 to 50°C)
Conductivity (Wiped)	0 to 100 mS/cm	0.0001 to 0.01 mS/cm	±1% of reading or 2 µS/cm, w.i.g.
	-5 to 50°C	0.001°C	±0.2°C
Depth	0 to 10, 100 or 250 m	0.001 m	±0.04% Full Scale
	0 to 10 m	0.001 m	±0.03% Full Scale
Dissolved Oxygen	0 to 500% air sat.	0.1% air sat.	±1% of reading or 1% sat., w.i.g., (0 to 200%) ±5% of reading (200 to 500%)
	0 to 50 mg/L	0.01 mg/L	±1% of reading or 0.1 mg/L, w.i.g., (0 to 20 mg/L) ±5% of reading (20 to 50 mg/L)
fDOM	0 to 300 ppb QSE	0.01 ppb QSE	Linearity: $r^2 \geq 0.999$ for 0 to 300 ppb QSE, MDL of 0.016 ppb QSE
pH	0-14 pH units	0.01 pH unit	±0.1 within ±10°C of cal temp ±0.2 for all other temps
	-999 to 999 mV	0.1 mV	±20 mV
Rhodamine	0 to 100 RFU or 0 to 1,000 µg/L	0.01 RFU or 0.01 µg/L	±5% or 0.1 µg/L w.i.g, Linearity: $r_2 > 0.999$
TAL-Chlorophyll TAL-Phycocyanin or TAL-Phycoerythrin	0 to 100 RFU or 0 to 400 µg/L chl	0.01 RFU or 0.01 µg/L of pigment	Linearity: $r^2 \geq 0.999$ for Rhodamine WT across full range
	0 to 100 RFU or 0 to 100 µg/L PC		
	0 to 100 RFU or 0 to 280 µg/L PE		
Turbidity	0 to 4000 FNU	0.01 FNU to 0.1 FNU	0.3 FNU or ±3% of reading, (0 to 999 FNU) ±5% of reading (1000 to 4000 FNU)

<sup>1</sup>Range dependent.

<sup>2</sup>Specifications indicate typical performance and are subject to change. Please check YSI.com/EXO for up-to-date information.

## EXO Smart Sensor Anatomy



## Calculated Parameters

The following parameters are calculated from one or more sensors listed above. More information about the methods and calculations may be found in the EXO User Manual.

- Absolute Pressure
- Salinity
- Ammonia
- Specific Conductivity
- DO% Local
- Total Algae cells/mL
- DO% LocalB
- Total Dissolved Solids
- Gauge Pressure
- Total Suspended Solids
- nLF Conductivity
- Vertical Position
- Resistivity
- Water Density

# KorEXO Software

KorEXO is an accessible, feature-rich software platform for managing EXO instrumentation and water quality data. The software allows you to calibrate sensors, setup long-term deployments, and ensure equipment is operating at peak performance. Designed to run on Windows OS computers and tablets, the interface is optimized for touchscreens and streamlined for operation in the field, lab, or office.

The screenshot shows the KorEXO software interface with several callout boxes highlighting features:

- Graph view makes it easy to visualize live or recorded data and spot trends.** (Icon: Line graph)
- Complete calibrations faster than ever! Redo or add calibration points on the fly with tips to ensure accuracy.** (Icon: Beaker)
- Sonde status is always on display so users know whether or not the sonde is deployed. New data are automatically downloaded when the sonde is connected.** (Icon: Gear)
- The 'Provide Feedback' button allows users to share their thoughts and make suggestions to continuously enhance the experience.** (Icon: Information)
- KorEXO Software assigns a QC Score after every calibration. Notifications are displayed for calibration errors or if sensors are not performing properly.** (Icon: Checkmark)

# Support and Protection for Your Peace of Mind

## Protect your investment with the EXO Factory Service Plan\*

With an **EXO Factory Service Plan**, you can minimize down-time and unexpected maintenance costs by keeping your equipment in top working order.

### What does the Service Plan include?

Plans cover standard replacement parts, firmware updates, seal restoration, cleaning, comprehensive evaluation, testing, and calibration of all sensors.

### What equipment is covered?

Each plan covers a single EXO sonde, field cable, handheld, and sensors purchased with the sonde.


### How long does coverage last?

Plans are available for coverage up to 3 years from the time the EXO Sonde is purchased.

\*Currently available in North America. Check with your regional technical support for service options.



Factory Service Center located in Yellow Springs, Ohio

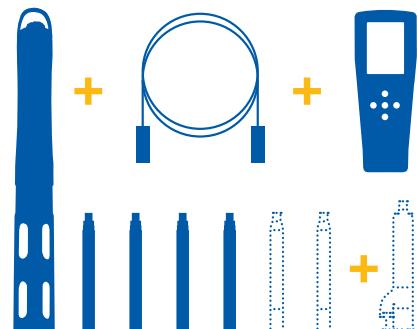

## Industry-Leading Technical Support

Our expert **Technical Support Team** is available to provide assistance and answer any questions that may come up in the field or lab.



Call **+1 (937) 767-2762**  
to speak with our knowledgeable staff



Email **info@ysi.com**  
for questions regarding your EXO equipment



Live Chat at **YSI.com**  
for immediate response from technical experts



Technicians are available for in-house or on-site training events



# Xylem |'ziləm|

- 1) The tissue in plants that brings water upward from the roots;
- 2) a leading global water technology company.

We're a global team unified in a common purpose: creating advanced technology solutions to the world's water challenges. Developing new technologies that will improve the way water is used, conserved, and re-used in the future is central to our work. Our products and services move, treat, analyze, monitor and return water to the environment, in public utility, industrial, residential and commercial building services settings. Xylem also provides a leading portfolio of smart metering, network technologies and advanced analytics solutions for water, electric and gas utilities. In more than 150 countries, we have strong, long-standing relationships with customers who know us for our powerful combination of leading product brands and applications expertise with a strong focus on developing comprehensive, sustainable solutions.

**For more information on how Xylem can help you, go to [www.xylem.com](http://www.xylem.com)**

*"I'm very proud of the great work our customers do using our best-in-class sonde platform."*



**Dr. Stephanie A. Smith**  
EXO Product Manager



YSI, a Xylem brand  
1725 Brannum Lane  
Yellow Springs, OH 45387

 +1.937.767.7241  
 [info@ysi.com](mailto:info@ysi.com)  
 [YSI.com](http://YSI.com)

EXO™ is a trademark of Xylem Inc. or one of its subsidiaries. Bluetooth® is a trademark of Bluetooth SIG Inc. Xenoy is a trademark of SABIC Plastics.  
© 2020 Xylem, Inc. E102-07 0320



[YSI.com/EXO](http://YSI.com/EXO)

**We represent this supplier.  
For more information contact  
Observator Instruments:**

**T: +31 (0)180 463411  
E: [info@observator.com](mailto:info@observator.com)**

Rietdekkerstraat 6  
2984 BM Ridderkerk  
The Netherlands

**Welcome to the world of Observator**

Since 1924 Observator has evolved to be a trend-setting developer and supplier in a wide variety of industries. Originating from the Netherlands, Observator has grown into an internationally

oriented company with a worldwide distribution network and offices in Australia, Germany, the Netherlands, Singapore and the United Kingdom.

**[www.observator.com](http://www.observator.com)**