



To see installation videos, scan the QR Code
or visit www.safety1st.com

©2016 Dorel Juvenile.



 4358-7083B
2.7.17

UltraMax™ Air 360 4-in-1 Car Seat

rear-facing child restraint for baby
4-22 lb (1.8-10 kg) and 29 in. (73.6 cm) or less

rear-facing child restraint for toddler
15-50 lb (6.8-22.6 kg) and 49 in. (125 cm) or less

forward-facing child restraint
22-65 lb (10.1-29 kg) and 29-49 in. (73.6-125 cm)
and at least 1 year old

booster seat
40-120 lb (18.1-54.4 kg) and 43-57 in.
(110.1-144.8 cm)

KEEP INSTRUCTIONS FOR FUTURE USE.

Read all instructions
before using this
child restraint.



⚠️ WARNING:

Failure to follow the warnings on the labels and in the instruction manual can result in serious injury or death to your child.

Choosing Rear Facing, Forward Facing, or Booster Seat

Your child's height, weight, and age determine how your child restraint should be placed in the vehicle.

Please talk to your doctor about the best option for your child.



REAR FACING

4-50 lb (1.8-22.6 kg)

49 in. (125 cm) or less

Children up to 1 year of age must ride rear facing.

The American Academy of Pediatrics recommends that children remain rear facing until they are at least 2 years old.

In this child restraint, your child can remain rear facing up to 50 lb (22.6 kg) and up to 49 in. (125 cm).



FORWARD FACING

22-65 lb (10.1-29 kg)

29-49 in. (73.6-125 cm)

At least 1 year old



BOOSTER SEAT

40-120 lb (18.1-54.4 kg)

43-57 in. (110.1-144.8 cm)

The American Academy of Pediatrics recommends that children remain in a five-point harness until they outgrow their forward-facing harnessed child restraint.

This typically occurs around age 4, but some children outgrow them sooner and others not until later.

⚠️WARNING: Verify your child's weight and height (do not guess) before choosing the child restraint's placement.



Lower Anchor Belt
Install Page 36

Do not install by this method for a child weighing more than 40 lbs (18 kg).



Vehicle Belt Install Page 41



Lower Anchor Belt
Install Page 46

Do not install by this method for a child weighing more than 40 lbs (18 kg).



Vehicle Belt Install Page 50



Lap and Shoulder Belt
Install Page 54




See page 14 to store internal harness system

Table of Contents

 Getting Started.....	1
Parts of the Child Restraint.....	1
Prepare Child Restraint to Fit Your Child	3
How Does Your Child Fit?	5
Changing Position of Buckle	7
Adjusting Headrest/Harness Height	9
Securing Child in Child Restraint.....	10
 General Use	13
Reclining Child Restraint	13
Storing Harness System.....	14
Removing Seat Pad for Cleaning.....	18
Installing Harness System	22
Accessories	25
 Safety Information.....	27
Child Restraint Use	27
Installation in Vehicle	27
Vehicle Seating Position.....	28
 Vehicle Information	29
Choosing Lower Anchor Belt or Vehicle Belts	29
Knowing Your Vehicle Belts.....	31
Aircraft Information	34
 Rear Facing	35
 Lower Anchor Belt Installation.....	36
 Vehicle Belt Installation	41
 Forward Facing	44
 Tether Use.....	45
 Lower Anchor Belt Installation.....	46
 Vehicle Belt Installation	50
 Booster Seat	53
 Lap and Shoulder Belt Installation	54
 Important Information.....	56
Using a Locking Clip	56
Troubleshooting.....	58
Dorel Juvenile Group Information.....	58
Registration and Safety Notices	59
Replacement Parts Order Form.....	60
Warranty.....	62


Parts of the Child Restraint

Front View

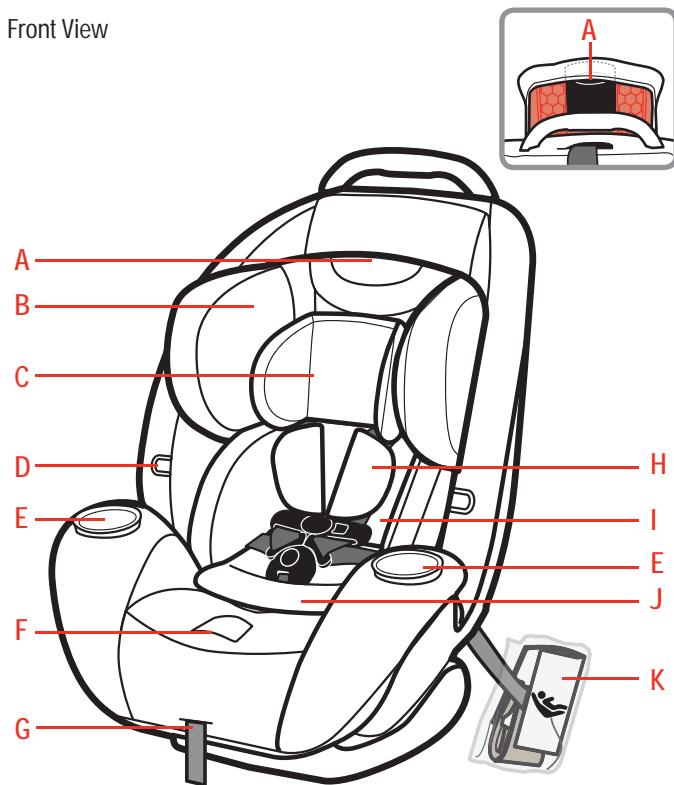


- A. Headrest/Harness Adjustment Handle (on back of headrest)
- B. Adjustable Headrest
- C. Head Pillow (see page 25)
- D. In and Out Harness Holders
- E. Removable Cupholders (see page 26)
- F. Harness Release Lever (under flap)
- G. Harness Adjustment Strap
- H. Harness Covers (see page 25)
- I. Body Pillow (see page 25)
- J. Soft Infant-Positioning Wedge (see page 26)
- K. Lower Anchor Belt (see page 29)


Side View

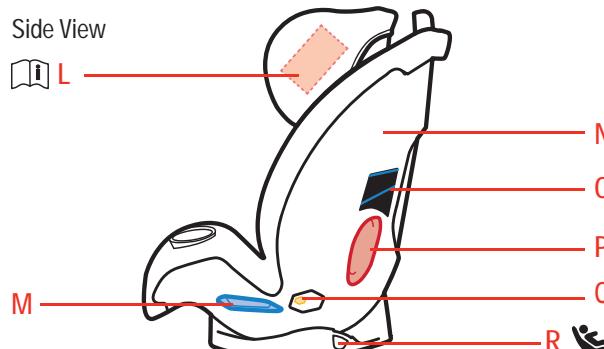

Harness System Detail




Back View

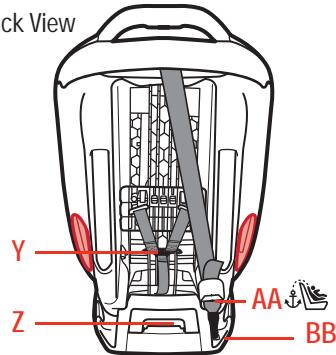

- L. Instruction Manual Storage (behind headrest pad)
- M. Rear-Facing Belt Path
- N. Shell (child restraint)
- O. Rear-Facing Level Lines
- P. Forward-Facing Belt Path
- Q. ClickClean™ Pad Attachment Button
- R. Lower Anchor Belt Attachment for Storage
- S. Shoulder Belt-Positioning Guide (behind headrest pad)
- T. Shoulder Harness Slots
- U. Chest Clip
- V. Harness Straps
- W. Buckle
- X. Buckle Slots
- Y. Splitter Plate
- Z. Recline Handle
- AA. Tether (see page 45)
- BB. Tether Attachment for Storage

Prepare Child Restraint to Fit Your Child



1. Fully Loosen Harness Straps


Push down on harness release lever (under flap on front of seat pad) while pulling out on harness straps as shown.



2. Unbuckle Harness

Press in towards the **top** of the red button.

Pull buckle tongues out.





3. Release Chest Clip

Press on chest clip release button and pull apart.

4. Place Harness Straps Out of Way


Slide buckle tongues into the In and Out harness holders as shown.



5. Place Child in Child Restraint to Determine Proper Harness Fit

The child's bottom and back should be flat against the child restraint.

See pages 5-6 for fit guidelines.



The soft infant-positioning wedge **MUST** be used for infants who weigh 4-11 lb (1.8-4.9 kg).

You **MUST** remove the soft infant-positioning wedge for children who weigh 15 lb (6.8 kg) or more.

How Does Your Child Fit?

Use the guidelines below to determine if the buckle and harness straps are in the right place for your child.

REAR FACING



Buckle Position

Start in the 1st slot and adjust outward as your child grows.

Buckle should be used in the slot closest to your child. The buckle should not be underneath or behind your child.

1st or 2nd slot **MUST** be used.



Harness Strap Position

Harness strap **MUST** be at or slightly below shoulders.

Always choose the shoulder harness slot position that is closest to your child's shoulder height.

If the shoulder harness slots are above the child's shoulders with the headrest in the lowest position, **do not** use this child restraint.

To change buckle position, see pages 7-8.

To adjust headrest/harness height, see page 9.

FORWARD FACING



Buckle Position

Start in the 1st slot and adjust outward as your child grows.

Buckle should be used in the slot closest to your child. The buckle should not be underneath or behind your child.

Any slot can be used.



Harness Strap Position

Harness strap **MUST** be at or slightly above shoulders.

Always choose the shoulder harness slot position that is closest to your child's shoulder height.

If the shoulder harness slots are below the child's shoulders with the headrest in the highest position and the child weighs at least 40 lb (18 kg), you must convert the child restraint to a booster seat.

To change buckle position, see pages 7-8.

To adjust headrest/harness height, see page 9.




Changing Position of Buckle



1. Unbuckle Harness


Press in towards the **top** of the red button.

Pull buckle tongues out.



2. Fully Recline the Child Restraint

Squeeze up and then pull out on the recline handle and push top of child restraint back.




3. Locate Buckle's Metal Retainer on Bottom of Shell



4. Rotate Metal Retainer and Push It Up Through Shell and Pad




5. From Top of Seat, Pull Buckle Out of Shell and Pad



6. Insert Buckle's Metal Retainer into Slot Closest to Child

Buckle **MUST** face out. You **MUST** use the 1st or 2nd buckle slots when child restraint is used rear facing. Any slot can be used when forward facing.



7. Pull Metal Retainer Completely Through Pad and Shell



8. Check Buckle

Pull up on buckle to make sure it is secured. The buckle **MUST** not pull out.

⚠ WARNING: Failure to place buckle's metal retainer completely through pad and shell can result in serious injury or death.




Adjusting Headrest/Harness Height



1. Fully Loosen Harness Straps

Push down on harness release lever (under flap on front of seat pad) while pulling out on harness straps as shown.



2. To Adjust Headrest/Harness Height

Squeeze the headrest/harness adjustment handle.

Move the headrest up or down to the proper height for your child. **See pages 5-6 for fit guidelines.**

Release it into slot to lock. Make sure it is securely locked into place.



WARNING: Do not use this child restraint rear facing unless the top of your child's head is at least 1 in. (2.5 cm) below the top of the child restraint's headrest.



WARNING: Do not use this child restraint forward facing if the tops of your child's ears are above the top of the child restraint's headrest.

Failure to follow these steps can result in serious injury or death.



Securing Child in Child Restraint



1. Place Child in Child Restraint

The child's bottom and back should be flat against the child restraint.


Position harness strap over child's shoulders and upper thighs.



2. Buckle Harness


Push buckle tongues into buckle until you hear them "click."

Pull up on harness strap to make sure buckle is locked.




3. Close Chest Clip

Insert right half of chest clip into left half and snap together.




4. Tighten Harness

Pull on harness adjustment strap to tighten harness snugly.



5. Position Chest Clip

The chest clip must be placed at mid-chest (even with armpits) and away from the child's neck.



6. Check Harness Tightness

Try to pinch the harness at the shoulders vertically between index finger and thumb as shown.

If your fingers slip off, the harness is tight enough.

If you can pinch the harness strap, tighten more. The harness straps should be snug throughout their length.

A snug strap should not allow any slack. It lies in a relatively straight line without sagging. It does not press on the child's flesh or push the child's body into an unnatural position.

⚠️ WARNINGS: Failure to fasten and tighten the harness system correctly may allow the child to be ejected from the child restraint in a crash or sudden stop causing serious injury or death.

Do not mistake comfort for safety. Harness system must be snugly adjusted.



DO NOT put snowsuits or bulky garments on your child when placing them in the child restraint.


Bulky clothing can prevent the harness straps from being tightened properly.

To Remove Child From Child Restraint:

1. Loosen Harness Strap
2. Unbuckle Harness
3. Release Chest Clip
4. Place Harness Straps Out of Way Using In and Out Harness Holders
5. Remove Child



Reclining Child Restraint



This child restraint has 3 positions:

Rear Facing


For children between 4-22 lb (1.8-10 kg), the bottom level line on shell **MUST** be parallel with the ground.

For children 22-50 lb (10.1-22.6 kg) who can sit up unassisted, rotate the child restraint between the 2 level lines.

Forward Facing - 1 Upright

Booster Seat - 1 Upright

NOTE: When forward facing, the reclined positions are to be used only to install the child restraint and booster seat flush against the vehicle seat back. Vehicle seat back must be upright.



How to Change Positions

To recline, squeeze up and then pull out on recline handle and push top of child restraint back.

For upright, squeeze up and then pull out on recline handle and pull top of child restraint forward.

Storing Harness System



Only store the harness system when converting child restraint into a booster seat.

To remove accessories, see pages 25-26.



1. Fully Loosen Harness Straps


Push down on harness release lever (under flap on front of seat pad) while pulling out on harness straps as shown.



2. Unbuckle Harness

Press in towards the **top** of the red button.

Pull buckle tongues out.



3. Locate Buckle's Metal Retainer


Fully recline the child restraint and reach under the seat between the base and shell.

Rotate metal retainer and push it up through shell and pad.




4. From Top of Seat, Pull Buckle Out of Shell and Pad

Store the buckle in a safe place for future use.




5. From Back, Remove Harness Strap Loops From Splitter Plate



6. Pull Harness Strap Out of Shoulder Harness Slots





7. Pull Seat Pad Panel Forward As Shown to Locate Where the Harness Straps Are Secured





8. Hold Left Harness Strap Up and Slide the Chest Clip Piece to the End of the Harness Strap



Fold the chest clip piece over the harness strap and roll it down the harness strap until the chest clip piece is wrapped as shown.




9. Slide Chest Clip Piece and Harness Strap into Slot in Shell As Shown



10. Repeat Steps 8 and 9 for Right Harness Strap and Chest Clip Piece



Removing Seat Pad for Cleaning



11. Stored Harness System

Buckle Tongue
Chest Clip Piece and Harness Strap



12. Put Seat Pad Panel Back into Place


You DO NOT need to remove the harness system to remove the pad from the shell.

To remove accessories, see pages 25-26.



1. Fully Loosen Harness Straps

Push down on harness release lever (under flap on front of seat pad) while pulling out on harness straps as shown.



2. Adjust the Headrest to the Highest Position


See page 9.



3. Unbuckle Harness

Press in towards the **top** of the red button.


Pull buckle tongues out.



4. Remove Cupholders


Twist the cupholders counterclockwise.

Pull out of slots in shell.




5. Push in on ClickClean™ Pad Attachment Button and Pull Up On the Pad As Shown to Release Pad from Shell


Repeat for other side.

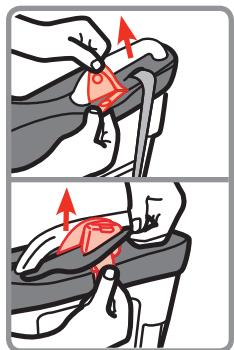


6. At the Top of the Seat, Undo Fasteners By Metal Bar and Pull the Tether Strap Out of the Slot in the Pad




7. Pull Pad off of Sides of Shell as Shown



8. Pull Pad Off of Bottom of Shell as Shown



9. Remove Pad from Shell



10. Slide Tab Out of Headrest Pad as Shown
Repeat for other side.



11. Gently Pull Headrest Pad Off of Headrest
Make sure headrest airbags stay in place.

Installing Harness System



⚠️ WARNINGS: Do not use child restraint without the seat pad. Failure to do this can result in serious injury or death.


Cleaning Pad and Accessories

Machine wash separately with cold water on a gentle cycle. Make sure harness covers are closed so fastening strips are not exposed. Do not use bleach. Tumble dry separately for 10-12 minutes on low heat. Remove immediately.

Cleaning Harness Straps

Spot clean using warm sudsy water and damp cloth.

Replacing Pad




Adjust the headrest to the highest position. Starting from the bottom, gently pull headrest pad onto headrest. Make sure headrest airbags stay in place. Slide harness straps into slots in headrest pad. Slide headrest tabs into headrest pad pockets.

Starting from bottom of child restraint, slip pad on shell. Pull harness adjustment strap through pad. Tuck pad around bottom and sides of shell. Push pad behind headrest. Wrap around the top of shell. Pull tether strap through slot in shell. Attach fasteners at top of pad.




Slide ClickClean™ pad attachment button into place. Push down on the plastic piece that is sewn into the pad until it "clicks" into place.




1. Fully Recline the Child Restraint

Squeeze up and then pull out on the recline handle and push top of child restraint back.




2. Insert Buckle's Metal Retainer into Slot Closest to Child

Buckle **MUST** face out. You **MUST** use the 1st or 2nd buckle slots when child restraint is used rear facing. Any slot can be used when forward facing.



3. Reach Under Seat Between Base and Shell

Pull metal retainer completely through pad and shell.





4. Check Buckle

Pull up on buckle to make sure it is secured.

The buckle **MUST** not pull out.


5. Remove Harness Straps from Storage

Pull seat pad panel forward as shown. Pull harness straps and chest clip pieces out of slots in shell. Put seat pad panel back into place.



6. Thread Harness Straps into Shoulder Harness Slots and Pull Through Pad and Shell

DO NOT twist harness straps.




7. From Back of Seat, Attach Harness Strap Loops to Splitter Plate As Shown

Sewn ends of the harness strap loops **MUST** face towards you.

DO NOT twist harness straps or harness adjustment strap.


Make sure the harness strap loops are fitted **COMPLETELY** ON both sides of the splitter plate.



If the buckle tongues and chest clip have been unthreaded from the harness straps, follow the steps below to rethread them.


1. Thread Buckle and Chest Clip

Harness strap ends go through the back of buckle tongues and through the chest clip front to back as shown.



2. Thread Harness Straps into Shoulder Harness Slots and Pull Through Pad and Shell


DO NOT twist harness straps.



3. From Back of Seat, Attach Harness Strap Loops to Splitter Plate As Shown

Sewn ends of the harness strap loops **MUST** face towards you.

DO NOT twist harness straps or harness adjustment strap.




Make sure the harness strap loops are fitted **COMPLETELY** ON both sides of the splitter plate.

WARNING: Harness system must be installed correctly. Failure to follow these steps can result in serious injury or death.




Accessories



Head Pillow

To remove head pillow, pull it up from behind the body pillow.


You must use the body pillow in order to use the head pillow.



Soft Infant-Positioning Wedge

To remove soft infant-positioning wedge, undo the buckle and pull the buckle through the slot in wedge and remove from the seat.

The soft infant-positioning wedge **MUST** be used for infants who weigh 4-11 lb (1.8-4.9 kg).



Harness Covers

Harness covers help provide comfort to the neck. If harness covers will not allow proper positioning of the chest clip or interfere with getting a tight enough fit for a smaller baby, remove and do not use.

Store them until child is large enough to use these harness covers while maintaining a properly fitting harness.

To remove harness covers, pull the fastening strips apart and remove harness covers.



Body Pillow




To remove body pillow, slide pillow out from behind the harness straps.

Removable Cupholders

To remove cupholder, twist the cupholder counterclockwise. Pull out of slot in shell.

The cupholder is dishwasher safe.

To install cupholder, align tabs on bottom of cupholder with slots in shell. Twist clockwise to lock in place.





Child Restraint Use

Never take your child out of the child restraint while the vehicle is moving.
Never leave child unattended.
Placing your child in a hot child restraint may result in burns.
Do not use a child restraint with damaged or missing parts.
Do not use cut, frayed or damaged harnesses.
Do not substitute parts or try to modify the child restraint in any way.
Do not lubricate buckles and fasteners.
Do not use any child restraint accessory except those approved by Dorel Juvenile Group.
Never allow any child to play with this child restraint; it is not a toy.
Do not remove or cover up any of the warning labels or other labels on the child restraint.

Read all instructions for additional warnings.

On the side of the child restraint there is a date of manufacture label. Do not use this child restraint more than 10 years after the date of manufacture.

Installation in Vehicle

Check the vehicle belt or lower anchor belt before each use. Use only if the belt is tightened properly and locked securely in place.

This child restraint should be securely belted in the vehicle even when not in use. In a crash or sudden stop, an unsecured child restraint could injure occupants.

Do not use a child restraint that has been in a crash. You must get a new child restraint.



Vehicle Seating Position



Never place a child rear facing in a seating position with an active frontal air bag.

Check the vehicle owner's manual for more information about air bag/child restraint use.



Use the child restraint only on vehicle seats that face forward.



Do not use on seats that face the sides or rear of the vehicle.

Use the center seating position if possible.

For vehicles without a back seat, refer to your vehicle owner's manual.

If you are not sure where to place the child restraint in your vehicle, consult your vehicle owner's manual, contact Dorel Juvenile Group Consumer Care Department (see page 58), or visit your local Child Passenger Inspection Station. Go to <http://www.safercar.gov/cpsApp/cps/index.htm> to find your closest station.



Children are safer when properly restrained in rear seating positions than in the front seating positions.

According to National Highway Traffic Safety Administration information, children in rear seating positions are statistically safer, whether you have air bags, advanced air bags, or no air bags at all.

To avoid your child being seriously burned, take the following precautions:


1. Park in the shade or where sun does not directly hit the child restraint.
2. Cover the child restraint with a sheet or blanket when not in use.
3. Check for hot seat and buckles before placing child in child restraint.

To help protect your vehicle seat's upholstery from damage, use a single layer towel underneath and behind child restraint.





Choosing Lower Anchor or Vehicle Belts

Your vehicle's features may be considerably different than those pictured here.

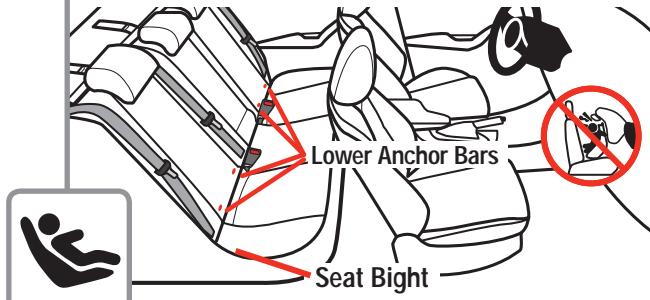

The LATCH System

The lower anchors of LATCH (Lower Anchors and Tethers for Children) is a universal system for installing child restraints without using vehicle seat belts. The lower anchor system can ONLY be used in vehicles that have the lower anchor bars installed and designated LATCH seating positions. Most vehicles manufactured after September 2002 are equipped with lower anchor bars. Check your vehicle owner's manual to see which seating positions may be equipped with the LATCH system.

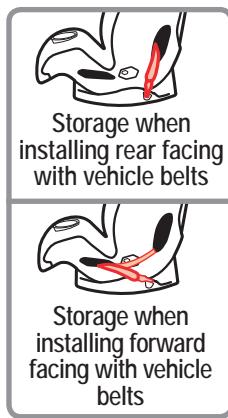


When installing this child restraint with vehicle belts or when using as a booster seat, the lower anchor hooks and belt MUST be properly stored.

Storing Lower Anchor Belt

When installing rear facing with vehicle belts, thread lower anchor belt through forward-facing belt path. Then attach hooks to attachment as shown. Gently pull free end of belt to remove slack.

When installing forward facing with vehicle belts, thread lower anchor belt through rear-facing belt path. Then attach hooks to attachment as shown. Gently pull free end of belt to remove slack.

Your vehicle's features may be considerably different than those pictured here.

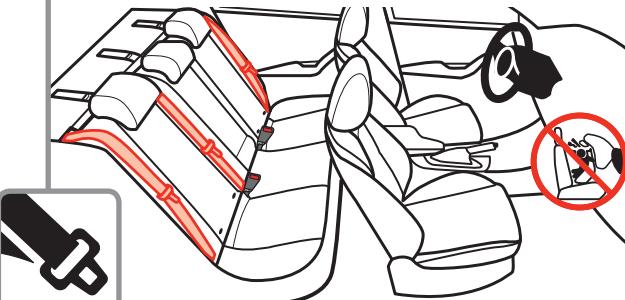

Vehicle Belts

If lower anchors are not an option or if your child weighs more than 40 lb (18 kg), you must use the vehicle seat belt system to install the child restraint.

There are some vehicle belts that will not work with a child restraint or will require special attention.


Check your vehicle owner's manual for specific instructions.

WARNING: When used correctly the lower anchor belt or vehicle belts are equally safe. Do not use both the lower anchor belt and vehicle belt at the same time.



Knowing Your Vehicle Belts

Not all vehicle belts and seating positions will work with child restraints. Please follow the following steps to understand how to lock a child restraint with a vehicle belt.



1. You MUST Review Your Vehicle Owner's Manual

Your vehicle owner's manual will let you know what vehicle belts and seating positions child restraints can be installed in.




2. Determine How the Child Restraint Will Be Locked Into Place

The vehicle belt MUST NOT loosen after tightening.

This means there needs to be a way to lock the vehicle belt.

The ways this can be done are:

- By using the seat belt's retractor; or
- By using the seat belt's latch plate.



3. Check the Retractor

Retractors pull seat belts into stored positions and lock the belt to hold passengers in place.

A retractor is most likely how you will be locking a child restraint into place.

See the next page for some common types of vehicle belt retractors that will work with this child restraint.

Types of Retractors

Switchable Retractor (most vehicles have this type)



This retractor can be switched to a locking mode.

You **MUST** have the retractor in the locking mode to use the seat belt with this child restraint.

Switching to locking mode: Slowly pull the shoulder belt all the way out, then let it go back in an inch or two.

As it goes back in, you will most likely hear a ratcheting sound. Gently pull the belt to see if it has locked. You will not be able to pull any more belt out if the lock has engaged.

Automatic Locking Retractor



This retractor always locks.

It will automatically lock after slowly pulling the seat belt out at least halfway and letting the belt go back into the retractor an inch or two.


Emergency Locking Retractor

See Step 4, "Check the Latch Plates," on next page.

If the retractor does not lock, it is most likely an Emergency Locking Retractor. These retractors only lock during a sudden stop or collision.

You will need to determine if your seat belt's latch plate can lock the belt. See Step 4, "Check the Latch Plates," on next page.

Aircraft Information



4. Check the Latch Plates

Latch plates are the part of the seat belt that goes into the buckle.

Hold the lap belt with one hand and with your other hand grasp the tongue of the latch plate (the part that goes inside the buckle). Pull the latch plate straight out in line with the lap belt.

If the latch plate does not slide up and down the vehicle belt, it is a **locking latch plate**.


If the latch plate slides up and down the vehicle belt, it is a **sliding latch plate**.

Sliding latch plates easily slip between the lap and shoulder portions of the belt.

If you have an Emergency Locking Retractor with a Sliding Latch Plate, you **MUST** use a locking clip to install the child restraint. See pages 56-57.



Locking Latch Plate



Emergency Locking Retractor with a Sliding Latch Plate

Never Use With This Child Restraint

Emergency Locking Retractor Lap Only Belt	
Inflatable Seat Belts	

This restraint is certified for aircraft use when used with the internal harness.

This restraint is not certified for aircraft use when used as a booster seat because aircraft seats do not have shoulder belts.

Install the child restraint in a window seat to avoid blocking the aisle. If the aircraft lap belt is too short, ask the flight attendant for a belt extender.

Use only on forward facing aircraft seats.


Contact the airline for their specific policies.



Some airlines may ask to see a label stating that this child restraint is certified for aircraft use.

There is an airplane certification label located on the side of this child restraint as shown.

WARNING: Store the lower anchor belt and tether strap when using the aircraft belts.



Rear Facing Aircraft Installation

For rear facing installation follow pages 41-43.



Forward Facing Aircraft Installation

For forward facing installation follow pages 50-52.




Rear Facing




**4-50 lb (1.8-22.6 kg)
49 in. (125 cm) or less**



Lower Anchor Belt
Do not install by this method for a child weighing more than 40 lbs (18 kg).



**Lap Belt
up to 50 lb
(22.6 kg)**



Lap/Shoulder Belt up to 50 lb (22.6 kg)



⚠️ WARNINGS: Never install a rear facing child restraint in the front seat of a vehicle equipped with an active frontal airbag.

This child restraint **MUST** always face the rear of the vehicle when the child is less than 1 year old.

The American Academy of Pediatrics recommends that children should remain rear facing until they are at least 2 years old.

Please talk to your doctor about the best option for your child.



Lower Anchor Belt Installation


⚠️ WARNINGS: Do not use the lower anchors of the child restraint anchorage system (LATCH system) to attach this child restraint when restraining a child weighing more than 40 lbs (18 kg).

The vehicle belt must be used for installation if your child weighs more than 40 lb (18 kg).

Do not use the lower anchor belt along with the vehicle lap or lap/shoulder belt.

Check lower anchor belt before each use. Use only if the belt can be tightened properly and securely.

Do not fasten multiple lower anchor hooks on the same lower anchor bar in the vehicle.





Store the tether hook when used rear facing. Attach the tether hook to storage attachment as shown and gently tighten to remove slack.


Failure to follow these warnings can result in serious injury or death.

1. Remove Lower Anchor Belt from Packaging or Storage Location

Or if the lower anchor belt was used forward facing, remove it from the forward-facing belt path so both hooks are on the same side of the seat as shown.



2. Route Lower Anchor Hook with Adjuster Closest to it into Rear-Facing Belt Path






3. Reach Under Pad and Pull Lower Anchor Belt Across to Opposite Side

Do not twist belt.

Belt **MUST** be in front of buckle strap and under seat pad.

You **MUST** use the 1st or 2nd buckle slot.



4. Finished Lower Anchor Belt Routing

5. Fully Recline Child Restraint

Squeeze up and then pull out on recline handle and push top of child restraint back.

6. Place Child Restraint Rear Facing in Back Seat

For children between 4-22 lb (1.8-10 kg), the bottom level line on shell **MUST** be parallel with the ground.


For children 22-50 lb (10.1-22.6 kg) who can sit up unassisted, rotate the child restraint between the 2 level lines.

Start by making the bottom level line parallel with the ground, then rotate seat up. Do not rotate past the top level line.



7. Attach Lower Anchor Hooks to Vehicle's Lower Anchors

Review your vehicle owner's manual for lower anchor locations and lower anchor belt use.





8. Tighten Belt

Place hand in child restraint.

Firmly push child restraint down and back towards the vehicle seat back while pulling free end of belt to tighten.

It may be easier to pull pad away from front and side of shell and pull the free end of the belt parallel with the belt path through belt path opening as shown.



9. Check Belt Tightness

Hold child restraint at the belt path with your weakest hand.

Push and pull from side to side.

It should not move more than 1 in. (2.5 cm).


If it moves more than 1 in. (2.5 cm), you can try:

- A. Pulling the belt tighter.
- B. Reinstalling the child restraint.
- C. Changing to a different seating location.
- D. Switching to vehicle belt installation.



10. Secure Child in Child Restraint


See pages 10-12.



11. Recheck Level Line

Make sure the child restraint is reclined according to your child's weight.

Repeat steps 6-11 if not reclined correctly.



NOTE: You may need to place a large rolled towel(s) or foam pool noodle(s) under front of child restraint to help achieve the correct recline angle. Check often to be sure padding is still in place and the belt is tight.




To Release Lower Anchor Belt

Remove child from child restraint.

Remove tension from the lower anchor belt by pushing down on side of child restraint with the lower anchor belt adjuster. Then press the adjuster button to loosen belt.

Unhook from anchor by squeezing spring lever on hook, pushing hook back into the seat bight, and twisting. Then pull it out of the vehicle seat.




Store lower anchor belt when not in use. See page 29.



Vehicle Belt Installation



WARNINGS: Do not use the lower anchor belt along with the vehicle lap or lap/shoulder belt. Secure lower anchor hooks to storage attachments as shown when installing with vehicle belts.




Store the tether hook when used rear facing. Attach the tether hook to storage attachment as shown and gently tighten to remove slack.

Check vehicle belt before each use.

Use only if the belt can be tightened properly and locked securely in place.

Failure to follow these warnings can result in serious injury or death.



1. Fully Recline Child Restraint

Squeeze up and then pull out on recline handle and push top of child restraint back.



2. Place Child Restraint Rear Facing in Back Seat

For children between 4-22 lb (1.8-10 kg), the bottom level line on shell **MUST** be parallel with the ground.

For children 22-50 lb (10.1-22.6 kg) who can sit up unassisted, rotate the child restraint between the 2 level lines.


Start by making the bottom level line parallel with the ground, then rotate seat up. Do not rotate past the top level line.




3. Check if Your Vehicle Belts Will Work With This Child Restraint

This is very important because **not all vehicle belts will work with child restraints.**

Review pages 31-33 and your vehicle owner's manual to determine what kind of vehicle belt you have and how to lock a child restraint in place.




4. Route Vehicle Lap or Lap/Shoulder Belt Through Rear-Facing Belt Path



5. Reach Under Pad and Pull Vehicle Belt Across to Opposite Side

Belt **MUST** be in front of buckle strap and under pad. **Do not twist belt.**

You **MUST** use the 1st or 2nd buckle slot.




6. Buckle Vehicle Belt

Forward Facing



7. Tighten Belt

Place hand in child restraint. Firmly push the child restraint down and towards the vehicle seat back while pulling the shoulder belt or the free end of lap belt down and towards you as shown.



8. Check Belt Tightness

Hold child restraint at the belt path with your weakest hand. Push and pull from side to side.


It should not move more than 1 in. (2.5 cm). **If it moves more than 1 in. (2.5 cm), you can try:**

- A. Pulling the belt tighter.
- B. Reinstalling the child restraint.
- C. Changing to a different seating location.
- D. Switching to the lower anchor belt installation if lower anchors are available in your vehicle.



9. Secure Child in Child Restraint

See pages 10-12.




10. Recheck Level Line

Make sure the child restraint is reclined according to your child's weight.

Repeat steps 2-10 if not reclined correctly.

NOTE: You may need to place a large rolled towel(s) or foam pool noodle(s) under front of child restraint to help achieve the correct recline angle.

Check often to be sure padding is still in place and the belt is tight.



22-65 lb (10.1-29 kg)

29-49 in. (73.6-125 cm)

At least 1 year old




Lower Anchor Belt with Tether

Do not install by this method for a child weighing more than 40 lbs (18 kg).



Lap Belt with Tether up to 65 lb (29 kg)



Lap/Shoulder Belt with Tether up to 65 lb (29 kg)

⚠️ WARNINGS: In this child restraint your child **MUST** be at least 1 year old before they sit forward facing.

The American Academy of Pediatrics recommends that children remain rear facing until they are at least 2 years old and remain in a five-point harness until they outgrow their forward-facing harnessed child restraint.

Please talk to your doctor about the best option for your child.




Tether Use

You **MUST** always attach, adjust, and secure the top anchorage (tether) strap when installing the child restraint forward facing with internal harness. Tethers improve the installation and stability of child restraints and reduce the risk of injury.

Attach the tether hook to the tether anchor designated by your vehicle manufacturer for that seating position. Check your vehicle owner's manual for more information.


If the seating position does not have a tether anchor, use a different seating position or see your dealer or a qualified mechanic and have one installed.

⚠️ WARNING: Do not fasten multiple tether hooks on the same tether anchor in the vehicle.




Adjusting Tether Strap

To tighten: After the child restraint is locked into place with lower anchor belt or vehicle belt, push down on child restraint and gently pull on free end of tether.



To loosen: Lift up on tether lock adjuster and push it towards tether hook.



Storing Tether Strap

When installing rear facing, using as a booster, or when not in use, attach the tether hook to its storage attachment on the base as shown. Gently tighten to remove slack.

Lower Anchor Belt Installation



⚠️ WARNINGS: Do not use the lower anchors of the child restraint anchorage system (LATCH system) to attach this child restraint when restraining a child weighing more than 40 lbs (18 kg).

The vehicle belt must be used for installation if your child weighs more than 40 lb (18 kg).

Do not use the lower anchor belt along with the vehicle lap or lap/shoulder belt.

Check the lower anchor belt before each use. Use only if the belt can be tightened properly and securely.

Do not fasten multiple lower anchor hooks on the same lower anchor bar in the vehicle.

Failure to follow these warnings can result in serious injury or death.




1. Remove Lower Anchor Belt from Storage Location

Or if it has been used rear facing, pull it out of the rear-facing belt path so both hooks are on the same side of the seat as shown.


2. Route Lower Anchor Belt Through Forward-Facing Belt Path

You may need to raise the headrest up to thread the lower anchor belt. The lower anchor belt adjuster can be on either side. Do not twist belt.



3. Finished Lower Anchor Belt Routing


Adjust headrest to the correct position for your child.
See page 6 for fit guidelines.



4. Place Child Restraint Forward Facing Flush Against Vehicle Seat Back

Put the child restraint into position 1.

NOTE: Do not use any recline positions except to make the child restraint flush against the vehicle seat back. Vehicle seat back must be upright.



5. Loosely Attach Tether Hook to Vehicle's Tether Anchor

Check vehicle owner's manual for specific location.




6. Attach Lower Anchor Hooks to Vehicle's Lower Anchors

Review your vehicle owner's manual for lower anchor locations and lower anchor belt use.

7. Tighten Belt

Place hand in child restraint. Firmly push down while pulling free end of belt to tighten.

It may be easier to pull the back panel of the pad away from shell and pull the free end of the belt parallel with the belt path opening as shown.



8. Tighten Tether

Push firmly on the back of the seat and pull the tether strap to remove all slack and create tension on the strap.




9. Check Belt Tightness

Hold child restraint at the belt path with your weakest hand. Push and pull from side to side. It should not move more than 1 in. (2.5 cm).

If it moves more than 1 in. (2.5 cm), you can try:

- A. Putting your knee in the seat and pulling the belt tighter.
- B. Reinstalling the child restraint.
- C. Changing to a different seating location.
- D. Switching to vehicle belt installation.




To Release Lower Anchor Belt

Remove child from child restraint. Remove tension from the lower anchor belt by pushing down on side of child restraint with the lower anchor belt adjuster. Then press the adjuster button to loosen belt.

Unhook from anchor by squeezing spring lever on hook, pushing hook back into the seat bight, and twisting. Then pull it out of the vehicle seat.

Store lower anchor belt when not in use. See page 29.



⚠️ WARNINGS: Do not use the lower anchor belt along with the vehicle lap or lap/shoulder belt.



Secure lower anchor hooks to storage attachments as shown when installing with vehicle belts.

Check vehicle belt before each use. Use only if the belt can be tightened properly and locked securely in place.


Failure to follow these warnings can result in serious injury or death.



1. Place Child Restraint Forward Facing Flush Against Vehicle Seat Back


Put the child restraint into position 1.

NOTE: Do not use any recline positions except to make the child restraint flush against the vehicle seat back. Vehicle seat back must be upright.



2. Loosely Attach Tether Hook

Check vehicle owner's manual for specific location.






3. Check if Your Vehicle Belts Will Work With This Child Restraint

This is very important because **not all vehicle belts will work with child restraints.**

Review pages 31-33 and your vehicle owner's manual to determine what kind of vehicle belt you have and how to lock a child restraint in place.

4. Route Vehicle Lap or Lap/Shoulder Belt Through Forward-Facing Belt Path

You may need to raise the headrest up to thread the vehicle belt. Do not twist belt.




5. Adjust Headrest to Correct Position for Your Child

See page 6 for fit guidelines.




6. Buckle Vehicle Belt



7. Tighten Belt

Place hand in child restraint.

Firmly push down while pulling shoulder belt or free end of lap belt to tighten.



8. Tighten Tether

Push firmly on the back of the seat and pull the tether strap to remove all slack and create tension on the strap.



9. Check Belt Tightness

Hold child restraint at the belt path with your weakest hand.

Push and pull from side to side.

It should not move more than 1 in. (2.5 cm).

If it moves more than 1 in. (2.5 cm), you can try:

- A. Putting your knee in the seat and pulling the belt tighter.
- B. Reinstalling the child restraint.
- C. Changing to a different seating location.
- D. Switching to the lower anchor belt installation if lower anchors are available in your vehicle.



Booster Seat



40-120 lb (18.1-54.4 kg)
43-57 in. (110.1-144.8 cm)



Lap/Shoulder Belt

You **MUST** store the harness system (see pages 14-17) and remove accessories, except for the cupholders, (see pages 25-26) to use as a booster seat.

⚠️ WARNINGS: Do not use the harness system when using as a booster seat.



Do not use this booster seat if the tops of your child's ears are above the top of the booster seat's headrest.



Use only the vehicle's lap and shoulder belt system when restraining the child in this booster seat.



Do not use only the lap belt when using this seat as a booster seat.

The shoulder belt must always be adjusted snugly across the child's chest. NEVER place the shoulder belt under the child's arms.

Do not use the LATCH system when using as a booster seat. Secure lower anchor belt and tether strap to their storage locations.

Failure to follow these warnings can result in serious injury or death.


The American Academy of Pediatrics recommends that children remain in a five-point harness until they outgrow their forward-facing harnessed child restraint.

This typically occurs around age 4, but some children outgrow them sooner and others not until later.

Please talk to your doctor about the best option for your child.



Lap and Shoulder Belt Installation



1. Place Booster Seat Forward Facing Flush Against Vehicle Seat Back

Put the child restraint into position 1.

NOTE: Do not use any recline positions except to make the booster seat flush against the vehicle seat back. Vehicle seat back must be upright.



2. Place Child in Booster Seat

Tops of the child's ears should never be above the top of the headrest.

Adjust headrest if needed, see page 9.




3. Position Lap Belt on Child

Route the lap belt portion of vehicle belt through the booster belt path as shown.

The lap belt should lay snugly across the child's upper thighs and not on the stomach.

Using a Locking Clip



4. Buckle Vehicle Belt



5. Position Shoulder Belt on Child

Pull up on shoulder belt to tighten.

The shoulder belt should lay snugly across the center of the child's shoulder and across the chest and not on their face or neck.

To help position the shoulder belt, you may need to secure the shoulder belt in one of the two shoulder belt-positioning guides behind headrest pad.

NOTE: Use the shoulder belt positioning guide only if necessary to correctly position the shoulder belt on the child.

Check periodically to make sure your child has not moved out of position and loosened the shoulder belt.




You will rarely need to use a locking clip except in some older vehicles. Built-in child restraint locking systems have been required in vehicles since 1996, and many vehicles had these features even earlier. Review pages 31-33 and your vehicle owner's manual to determine if your vehicle belts require a locking clip.

If you need a locking clip immediately, they are likely available at an auto dealership, an auto store, or where you purchased this child restraint. You can also call us at 1-800-544-1108 for one.

A locking clip will not fix all types of seat belt problems. You **MUST** have a lap and shoulder belt to use a locking clip. **Do not use the locking clip when using this seat as a booster seat.**

For Rear Facing installation, follow pages 41-43 Warnings and Steps 1-7 before starting locking clip installation.

For Forward Facing installation, follow pages 50-52 Warnings and Steps 1-7 before starting locking clip installation.




1. Determine Locking Clip Position

Grasp both vehicle belts together just behind the latch plate to mark the position for locking clip.


Unbuckle the belt.

NOTE: If the latch plate ends up just at the belt path opening so you cannot grasp the vehicle belt at the latch plate, grasp the vehicle belts on the opposite side of the child restraint, as close to the latch plate as possible.




2. Attach Locking Clip

Thread both portions of the vehicle belt onto the locking clip, as close to the latch plate as possible.




3. Position Locking Clip

It should be about 1 in. (2.5 cm) from vehicle belt's latch plate.



4. Rebuckle Vehicle Belt



5. Check Belt Tightness

Hold child restraint at the belt path with your weakest hand.

Push and pull from side to side.

It should not move more than 1 in. (2.5 cm). **If it moves more than 1 in. (2.5 cm),** you can try:

- A. Reinstalling the child restraint.
- B. Changing to a different seating location.

When installed rear facing, recheck the level line.

When installed forward facing, make sure to tighten the tether strap.

Remove the locking clip when the seat belt is not being used with a child restraint.



Troubleshooting

1. Locate a Child Safety Seat Inspection Station for hands on training on how to use your child restraint: Visit your local Child Passenger Inspection Station or go to <http://www.safercar.gov/cpsApp/cps/index.htm> to find your closest station.

2. If the child restraint buckle or harness release lever sticks or you cannot get the straps tight enough around child: DO NOT LUBRICATE. Check around lever and retractor for dropped food, sticky spilled drinks, dirt, leaves, etc. Clean with warm water and/or remove object with tweezers. If you cannot get the harness to adjust and remain tight with the buckle securely locked, do not use the child restraint.

3. If your harness twists: Straighten the harness each time you put your child in the child restraint to help prevent twisting. Lock the buckle and tighten harness so it will be ready for next use.

Dorel Juvenile Group Information

Thank you for choosing this child restraint. The DJG family is committed to creating child restraints with the most comfort and convenience available today.

Remember, parents are a child's first teachers and examples. If you always buckle your seat belt, your child will think it is the natural thing to do. Make it a firm rule that the vehicle does not go until everyone is buckled up. Make no exceptions.

No one can predict if use of a child restraint will prevent injury or death in a particular crash. However, when combined with careful driving, proper use of a child restraint can lower a child's risk of injury or death in most crashes.

Your child's safety is worth the time it will take to read and follow these instructions. After reading, if you still have questions or have any concerns with this child restraint, please contact our Consumer Care Department at:

Website: www.safety1st.com

Telephone: 1-800-544-1108

M-TH from 8 A.M. to 6 P.M. EST
FRI from 8 A.M. to 4:30 P.M. EST

Mailing Address:

Dorel Juvenile Group, Inc.
Consumer Care Department
P.O. Box 2609
Columbus, IN 47202-2609

Registration and Safety Notices

Please complete the postage-paid registration card that came with your child restraint, and send it to us. Child restraints could be recalled for safety reasons. You must register this restraint to be reached in a recall. Send your name, address, email address if available and the restraint's model number and manufacturing date to:

Dorel Juvenile Group, Inc.
Consumer Care Department
PO Box 2609
Columbus, IN 47202-2609


or call 1-800-544-1108 or register online at www.djgusa.com/registration/carseat/us.

For recall information, call the U.S. Government's Vehicle Safety Hotline at 1-888-327-4236 (TTY: 1-800-424-9153), or go to <http://www.NHTSA.gov>.

Consumer: Just fill in your name, address and email. Please print (use dark ink).

Your Name		
Your Street Address		
City _____ State _____ Zip Code _____		
Model Number <small>(optional)</small>	Line Code	Manufacture Date
Model Number AB123CDE	Model Name S1 CARSEAT	Manufacture Date 01/22/2015
 L#11 B265035		

Example of model number, manufacture date, and line code.



If you don't have the card or if your address changes, you will find the model number, manufacture date, and line code on the label located on side of shell.

Replacement Parts Order Form

Complete the form. Your model number and manufacturer date code **MUST** be included on the form to ensure proper replacement parts. The codes can be found on a label on side of child restraint. Payment in U.S. dollars must accompany your order. Choose parts needed from the list on the next page. Return the form with payment to:

Dorel Juvenile Group, Inc.
Consumer Care Department
P.O. Box 2609
Columbus, IN 47202-2609

Please make money orders payable to Dorel Juvenile Group, Inc. Fill in the area on the next page to charge credit card. (Visa or MasterCard **only**). We do not accept cash, personal checks, or other credit cards. All outside of U.S. and Canada **MUST** use credit card.

Ship To: (Please Print)

Name: _____

Address: _____

City: _____

State/Province: _____ **Zip:** _____

Telephone: _____

Email Address: _____

We **MUST** have this information:

Model Number (8 to 9 characters): _____

Manufacture Date (mm/dd/yyyy): _____

Replacement Parts List

NOTE: If requested color is not available, similar color will be substituted. Prices are subject to change.

Part	Cost	Qty	Total Cost
Buckle Assembly	\$7.99	\$_____
Seat Pad Set	\$95.00	\$_____
Chest Clip	\$1.50	\$_____
Tether	\$6.00	\$_____
Lower Anchor Belt	\$17.99	\$_____
Instructions	\$0.00	\$_____
Locking Clip	\$2.50	\$_____
Merchandise Total:		\$_____
Shipping and handling:		\$_____

Up to \$25.00	\$5.95	\$100.01 to \$150.00	\$10.95
\$25.01 to \$50.00	\$6.95	\$150.01 to \$200.00	\$11.95
\$50.01 to \$75.00	\$8.95	\$200.01 and up	\$13.95
\$75.01 to \$100.00	\$9.95	Outside Continental USA\$10.00

Sales Tax \$_____

(Arizona, California, Georgia, Indiana, Missouri, South Carolina, and Texas residents add applicable sales tax.)

Grand Total \$_____

No shipping and handling on instructions for quantities under 6. Add \$.50 for each instruction over 6, then add applicable shipping and handling.

Fill Out For Credit Card
 Visa **MasterCard**

Card Exp. Date:

Cardholder's Name:

Card Number:

Signature:

Warranty

Dorel Juvenile Group, Inc. (DJG) warrants this product to the original retail purchaser as follows:

This product is warranted against defective materials or workmanship for one year from the date of original purchase. **An original receipt is required to validate your warranty.** DJG will, at its option, provide replacement parts or replace this product. DJG reserves the right to substitute if the part or model has been discontinued.

To make a claim under this warranty you may write to DJG, Consumer Care Department, P. O. Box 2609, Columbus, IN 47202-2609; or call 1-800-544-1108 from 8:00 a.m. to 6:00 p.m. EST Monday through Thursday and from 8:00 a.m. to 4:30 p.m. on Friday.

Proof of purchase is required and shipping charges are the responsibility of the consumer.

Warranty Limitations: This warranty does not include damages which arise from misuse or abuse of this product.

Limitation of Damages: The warranty and remedies as set forth are exclusive and in lieu of all others, oral or written, expressed or implied. In no event will DJG or the dealer selling this product be liable to you for any damages, including incidental or consequential damages, arising out of the use or inability to use this product.

Limitation of warranties and other warranty terms and state law rights:

Any implied warranties, including implied warranties of the merchantability and fitness for a particular purpose, shall be limited to the duration and terms of the express written warranty. Some states do not allow limitations as to how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damages, so the above limitations may not apply to you.

This warranty gives you specific legal rights, and you may have other rights, which vary from state to state. Neither DJG nor the dealer selling this product authorized any person to create for it any other warranty, obligation, or liability in connection with this product.