

Product Specifications

R Model: FB-SW3 Fall Arrest Post Base Plate With Tie-Off Anchor, 2-Ear Pin Mount - Weld-On

General Specifications:

- 1. The FB-SW3 Fall Arrest Post Weld-On Base Plate is intended to be permanently attached upon structural steel members and be used with any one of Pelsue's removable mounting Fall Arrest Posts.
- 2. Plate is to be welded on to surface adhering to all PELSUE guidelines.

Materials & Construction:

TIE-OFF ANCHOR

Dimensions:

| GENERAL DIMENSIONS: | . LENGTH - 9.0" |
|---------------------|--------------------|
| | WIDTH - 8.0" |
| | HEIGHT - 2.9" |
| WEIGHT: | .12 LBS. (5.5 KG.) |

Strength & Testing Data:

Mounting & Installation Requirements:

!WARNING! - FAILURE TO COMPLY WITH MOUNTING REQUIREMENTS WILL VOID ANY WRITTEN OR IMPLIED RATING AND COULD RESULT IN SERIOUS INJURY OR DEATH

- 1. The base plate must be welded to the supporting structure by a qualified & certified welder following prescribed AWS procedure & protocol.
 - 2. The base plate must be welded with 5/16" (8 MM) continuous fillet weld all around the four sides of the base plate.
 - 3. It is the user's responsibility to ensure that the supporting structure to which the base plate is attached is capable of withstanding and supporting the base plate's reported proof loads. Failure to do so will void any system rating.
 - 4. In order to comply with all standards and stated ratings, the FB-SW1 Base Plate must be installed by a certified welder following the requirements given within PELSUE Document 500588-001; "Guidelines for Installation of PELSUE Brand Weld-On Fall Arrest Post Base Plates." Failure to follow guidelines will negate all claims of compliance and/or certification




 T.A. Pelsue Company
 claims of ca

 2500 S. Tejon St.
 Englewood, CO 80110

 Ph: 1-800-525-8460, (303) 936-7432
 Fax: (303) 934-5581

 Web: www.pelsue.com
 E-mail: sales@pelsue.com

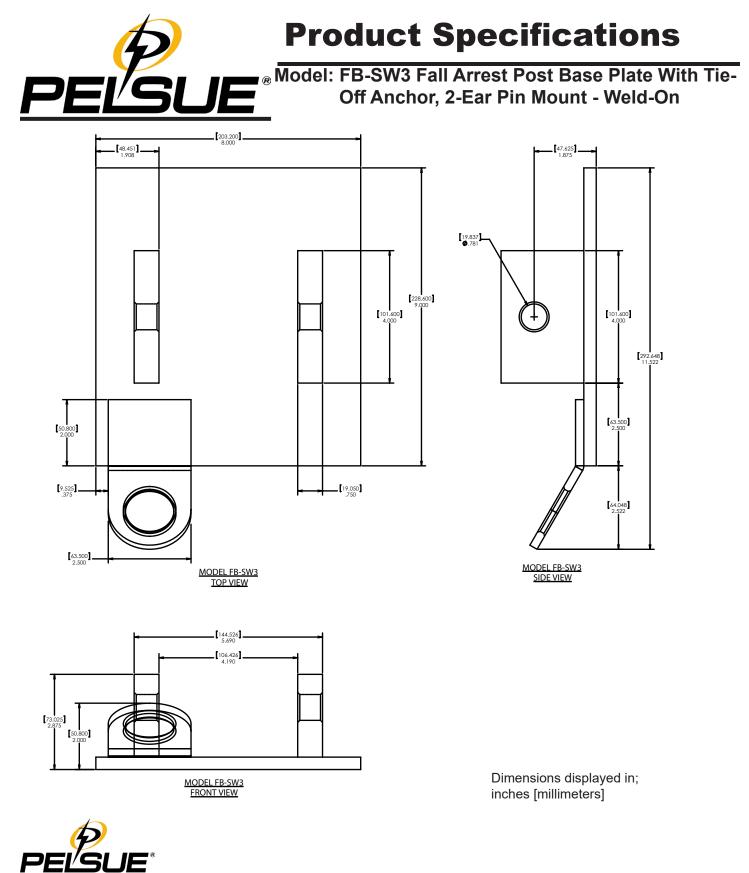

T.A. Pelsue Company 2500 S. Tejon St. Englewood, CO 80110 Ph: 1-800-525-8460, (303) 936-7432 Fax: (303) 934-5581 Web: www.pelsue.com E-mail: *sales@pelsue.com*